


IN-LINE PUMPS



**TECHNICAL
CATALOGUE**

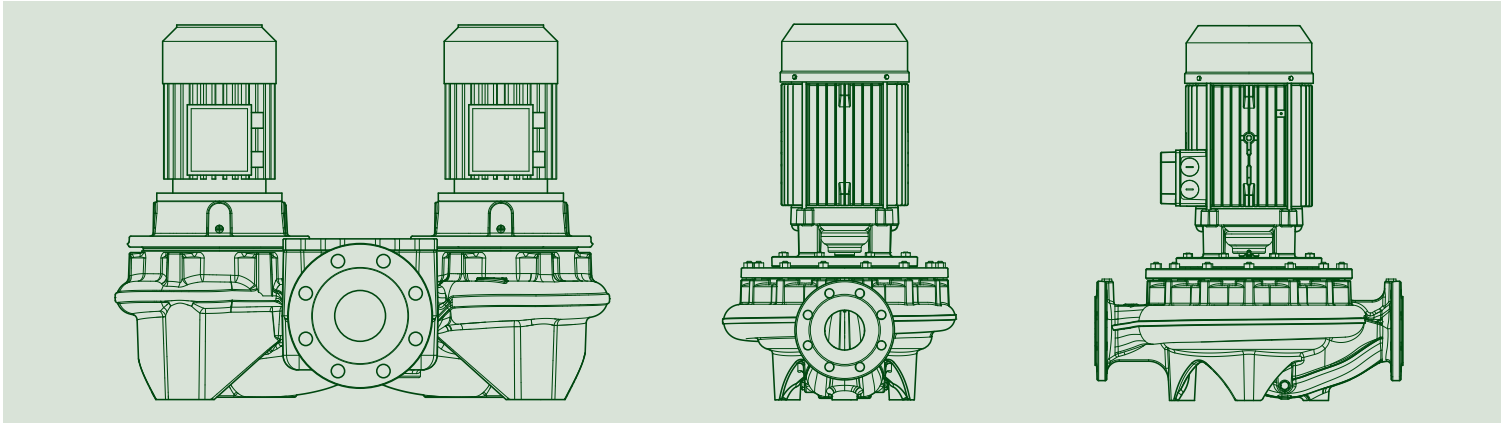

www.csq.it

CISQ is a member of



www.ionet-certification.com

CISQ, the abbreviation of the Italian CEN 17021 certification system, is the largest provider of management system certification in the world. IONet is composed of more than 20 bodies and counts over 100 subsidiaries all over the globe.

CERTIFICATO N. 9101.COGE
CERTIFICATE N. 9101.COGE

SI CERTIFICA CHE IL SISTEMA DI GESTIONE PER LA QUALITÀ DI
WE HEREBY CERTIFY THAT THE QUALITY MANAGEMENT SYSTEM OPERATED BY

DWT HOLDING SPA
VIA MARCO POLO 14 - 35035 MESTRINO (PD)

UNITÀ OPERATIVE / OPERATIVE UNITS

Vedere gli Allegati per le Unità Operative (n° 6 pagine)
View the Annexes for the Operative Units (n° 6 pages)

**E' CONFORME ALLA NORMA / IS IN COMPLIANCE WITH THE STANDARD
ISO 9001:2015**

PER LE SEGUENTI ATTIVITÀ / FOR THE FOLLOWING ACTIVITIES

Progettazione, produzione, commercializzazione e assistenza di pompe, elettropompe, gruppi di pompaggio e sistemi elettronici di controllo per acqua fredda, calda ad uso civile, industriale ed agricolo e relativi componenti ed accessori
Design, production, sale and assistance of pumps, electric pumps, pumping units and electronic control systems for cold and hot water, for residential, industrial and agriculture use including components and accessories

Ulteriori informazioni riguardanti l'applicabilità dei requisiti ISO 9001:2015 possono essere ottenute consultando l'organizzazione
Further clarifications regarding the applicability of ISO 9001:2015 requirements may be obtained by consulting the organization

IL PRESENTE CERTIFICATO E' SOGGETTO AL RISPETTO DEL
REGOLAMENTO PER LA CERTIFICAZIONE DEI SISTEMI DI GESTIONE
THE USE AND THE VALIDITY OF THE CERTIFICATE SHALL SATISFY THE
REQUIREMENTS OF THE RULES FOR CERTIFICATION OF MANAGEMENT SYSTEMS

DATE	PRIMA CERTIFICAZIONE FIRST CERTIFICATION	EMMISSIONE CORRENTE CURRENT ISSUE	SCADENZA EXPIRY
	1995-07-17	2021-05-11	2024-05-27



ISO S.p.A. - VIA QUINTELLANO, 43 - 20138 MILANO ITALY
Management Systems Division - Piano Origo



SCQ N° 005 A

Numero del Certificato di Accreditamento: 005 A per il sistema ISO 9001:2015 (Certificazione)

IAF: 18, 19, 28





www.ionet.com

CISQ è la Federazione Italiana di Organismi di Certificazione del sistema di gestione aziendale. CISQ è l'Italian Federation of Management System Certification Bodies.



www.csq.it

CISQ is a member of



www.ionet-certification.com

CISQ, the abbreviation of the Italian CEN 17021 certification system, is the largest provider of management system certification in the world. IONet is composed of more than 20 bodies and counts over 100 subsidiaries all over the globe.

ALLEGATO N. 9101.COGE-1
ANNEX N.

DWT HOLDING SPA
VIA MARCO POLO 14 - 35035 MESTRINO (PD)
DAB PUMPS SPA
VIA MARCO POLO 14 - 35035 MESTRINO (PD)

Attività:
Activities:

Progettazione, produzione, commercializzazione e assistenza di pompe, elettropompe, gruppi di pompaggio e sistemi elettronici di controllo per acqua fredda, calda ad uso civile, industriale ed agricolo e relativi componenti ed accessori
Design, production, sale and assistance of pumps, electric pumps, pumping units and electronic control systems for cold and hot water, for residential, industrial and agriculture use including components and accessories

IL PRESENTE ALLEGATO HA LO SCOPO DI SPECIFICARE LE ATTIVITÀ SVOLTE PRESSO IL SINGOLO SITO/UNITÀ OPERATIVA NELL'AMBITO DELLA CERTIFICAZIONE DEL SISTEMA DI GESTIONE
RILASCIATA A DWT HOLDING SPA
THE AIM OF PRESENT ANNEX IS TO EXPLAIN THE ACTIVITIES PERFORMED IN EACH SITE/OPERATIVE UNIT OF THE MANAGEMENT SYSTEM CERTIFICATION ISSUED TO DWT HOLDING SPA

PER LA VALIDITÀ RIFERIRSI AL CERTIFICATO N. 9101.COGE
FOR THE VALIDITY PLEASE REFER TO CERTIFICATE N. 9101.COGE

DATE	PRIMA CERTIFICAZIONE FIRST CERTIFICATION	EMMISSIONE CORRENTE CURRENT ISSUE	SCADENZA EXPIRY
	1995-07-17	2021-05-11	2024-05-27



ISO S.p.A. - VIA QUINTELLANO, 43 - 20138 MILANO ITALY
Management Systems Division - Piano Origo



SCQ N° 005 A

Numero del Certificato di Accreditamento: 005 A per il sistema ISO 9001:2015 (Certificazione)

IAF: 18, 19, 28





www.ionet.com

CISQ è la Federazione Italiana di Organismi di Certificazione del sistema di gestione aziendale. CISQ è l'Italian Federation of Management System Certification Bodies.



SCAN HERE
For more information.

CONTENTS

IN-LINE PUMPS



ALM / ALP

PAGE 3



CM, CM-G / DCM, DCM-G

PAGE 57



KLM / KLP / DKLM / DKLP

PAGE 8



CP, CP-G / DCP, DCP-G

PAGE 96



**CM2, CM2-G / CP2, CP2-G /
DCM2, DCM2-G / DCP2, DCP2-G**

PAGE 29

HYDRAULIC EFFICIENCY

PAGE 127

ACCESSORIES



PAGE 133



TECHNICAL DATA

Flow rate (range): ALM 200, ALP 800: from 0,6 m³/h to 6 m³/h
 ALM 500, ALP 2000: from 1,5 m³/h to 8,4 m³/h

Head: ALM 200, ALP 800: up to 7,7 m
 ALM 500, ALP 2000: up to 21,1 m

Type of pumped liquid: clean, free from solid or abrasive substances, non-viscous, non-aggressive, non-crystallized

Glycol percentage (maximum): 50%

Liquid temperature (range): from -15°C to +120°C

Maximum room temperature: +40°C

Operation pressure (maximum): 10 bar / 1000 kPa

Flanging or threading: threading ALM 200, ALP 800: 1" 1/2 M GAS
 threading ALM 500, ALP 2000: 2" M GAS

Motor efficiency class: single phase motors: >=120 W IE2
 Three phase motors: <0,75 kW IE2
 >=0,75 kW up to 75 kW IE3

Motor protection class: IPX5

Motor insulation class: F

Impeller material: technopolymer

Single phase power input: 230 V 50 Hz

Three phase power input: 3x230 V 50 Hz / 3x400 V 50 Hz

Revolution per minute: 1480 rpm for ALM - 2925 rpm for ALP

Type of installation: ALM 200, ALP 800: fixed in horizontal position
 ALM 500, ALP 2000: fixed in horizontal or vertical position

Certification: ACS

In-line pumps designed for conditioning, heating, water recirculation in the presence of solar thermal panels (solar collectors) and for the circulation of drinkable hot water in residential building service and commercial building service. All pumps have the ACS certificate for drinkable water.

CONSTRUCTION FEATURES OF THE PUMP

The ALM 200 and ALP 800 versions have a pump body and motor support in bronze, while the ALM 500 and ALP 2000 versions have a cast iron pump body. Intake and outlet are threaded. Technopolymer impeller, silicon carbide mechanical seal.


CONSTRUCTION FEATURES OF THE MOTOR

Four pole asynchronous motor for the ALM version, two pole asynchronous motor for the ALP versions. Motor shaft in AISI 303 stainless steel, mounted on ball bearings. Thermo-amperometric protection and capacitor incorporated in the single-phase version. The user is responsible for the protection of three-phase version.

MATERIALS

N.	PARTS*	MATERIALS	MODELS
1	PUMP BODY	BRONZE G Cu Sn5 Zn5 Pb5 UNI 7013/8 ^a -72	ALM 200 - ALP 800
		CAST IRON 250 UNI ISO 185	ALM 500 - ALP 2000
3	SUPPORT	BRONZE G Cu Sn5 Zn5 Pb5 UNI 7013/8 ^a -72	ALM 200 - ALP 800
		CAST IRON 250 UNI ISO 185	ALM 500 - ALP 2000
4	IMPELLER	TECHNOPOLYMER	
7	SHAFT WITH ROTOR	AISI 316 STAINLESS STEEL	
16	MECHANICAL SEAL	SILICON CARBIDE / SILICON CARBIDE	
28	OR RING	EPDM RUBBER	


* In contact with the liquid

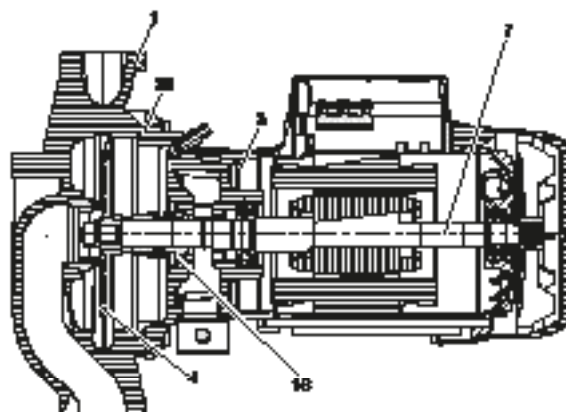


ALM / ALP

IN-LINE PUMPS

– Denomination index:
(example)

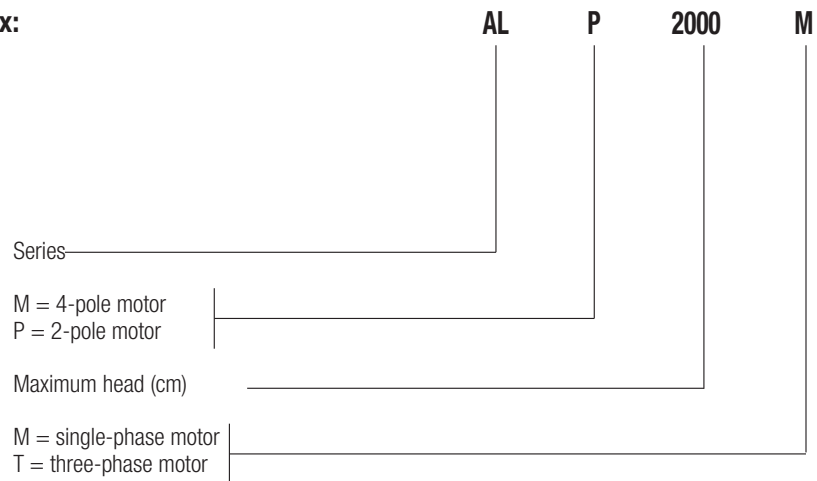

Fixed horizontal installation for ALM 200 and ALP 800; both horizontal and vertical installation for ALM 500 and ALP 2000.

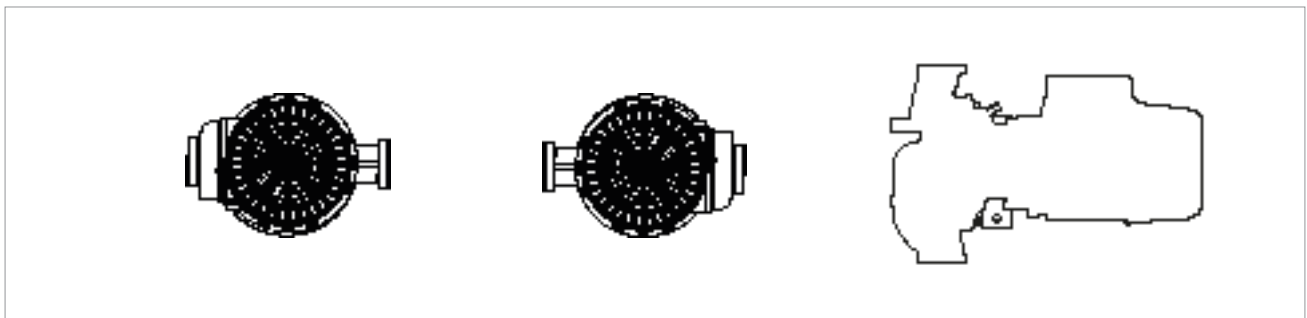


IN-LINE PUMPS

FOR CIRCULATION SYSTEMS

PERFORMANCE RANGE



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

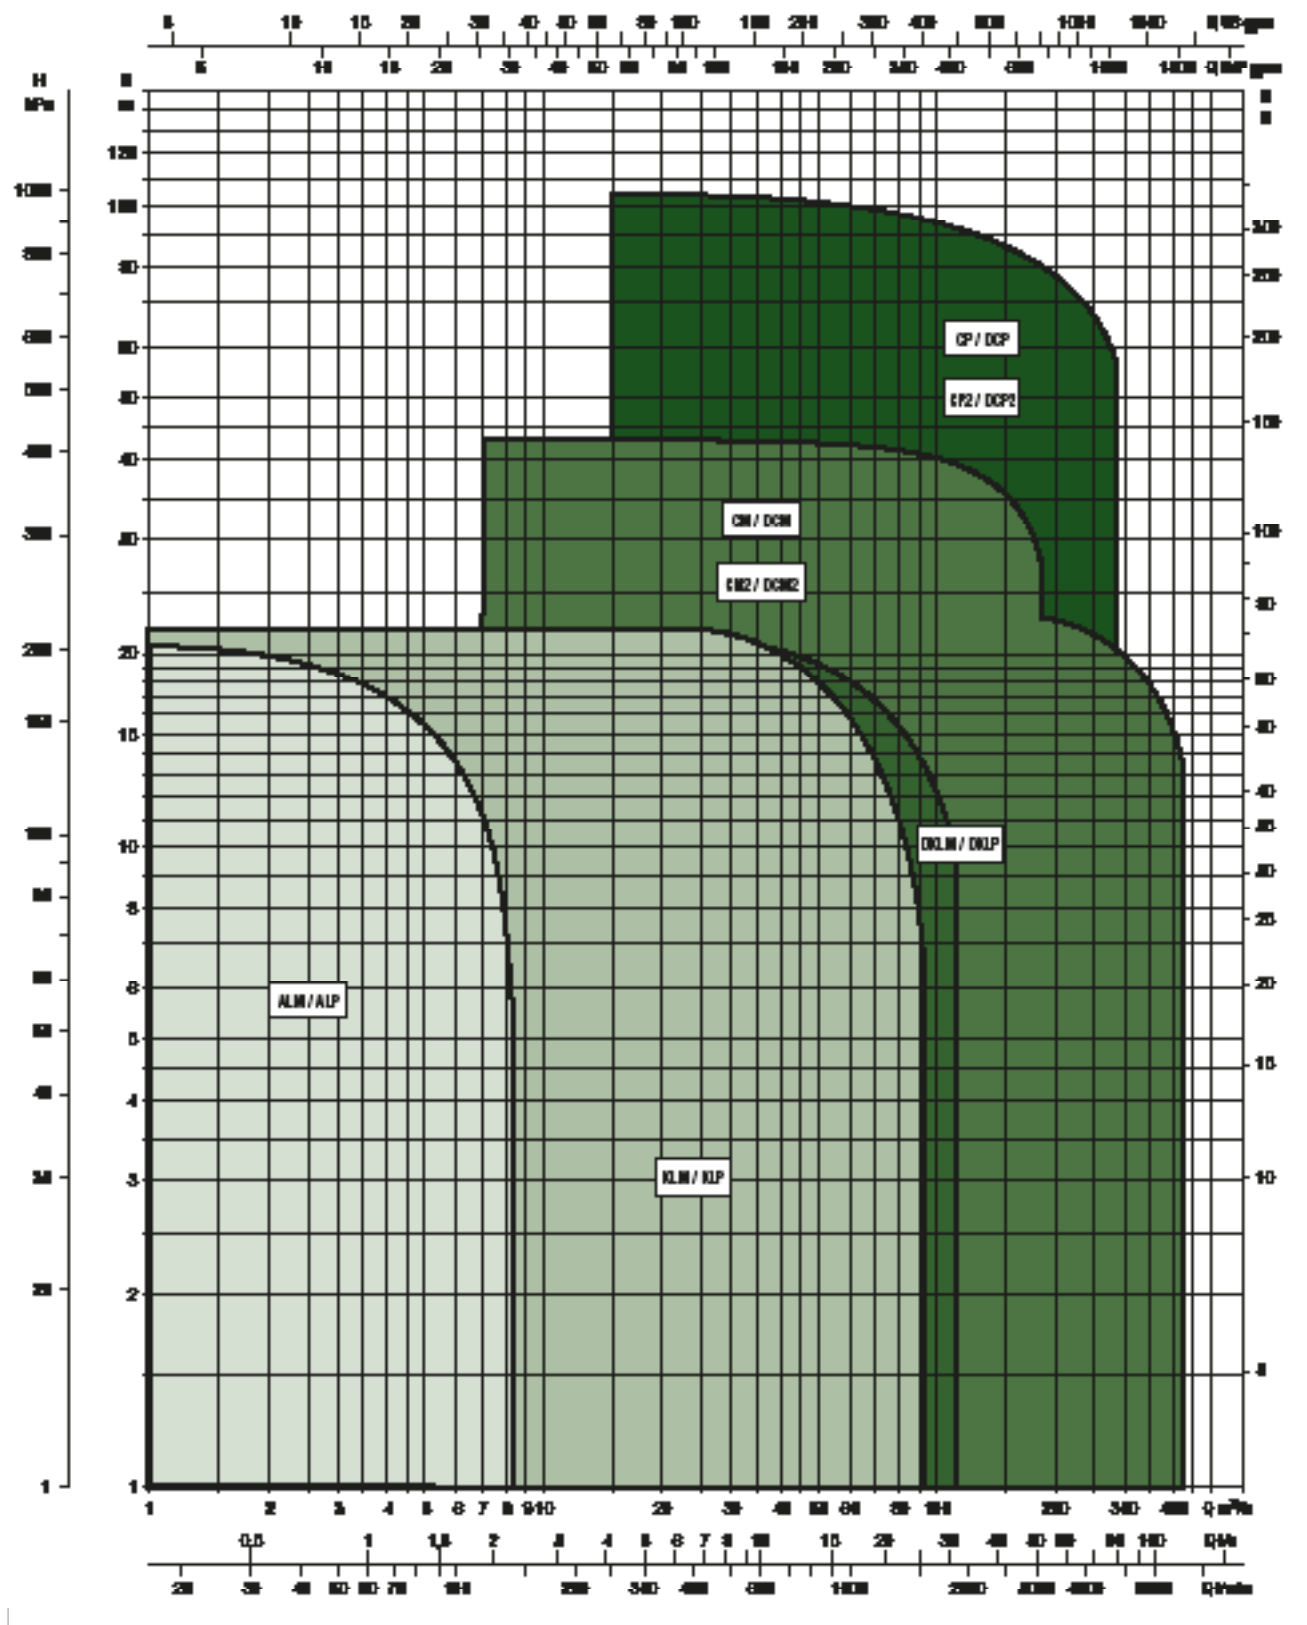

ALM 200 / ALP 800 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

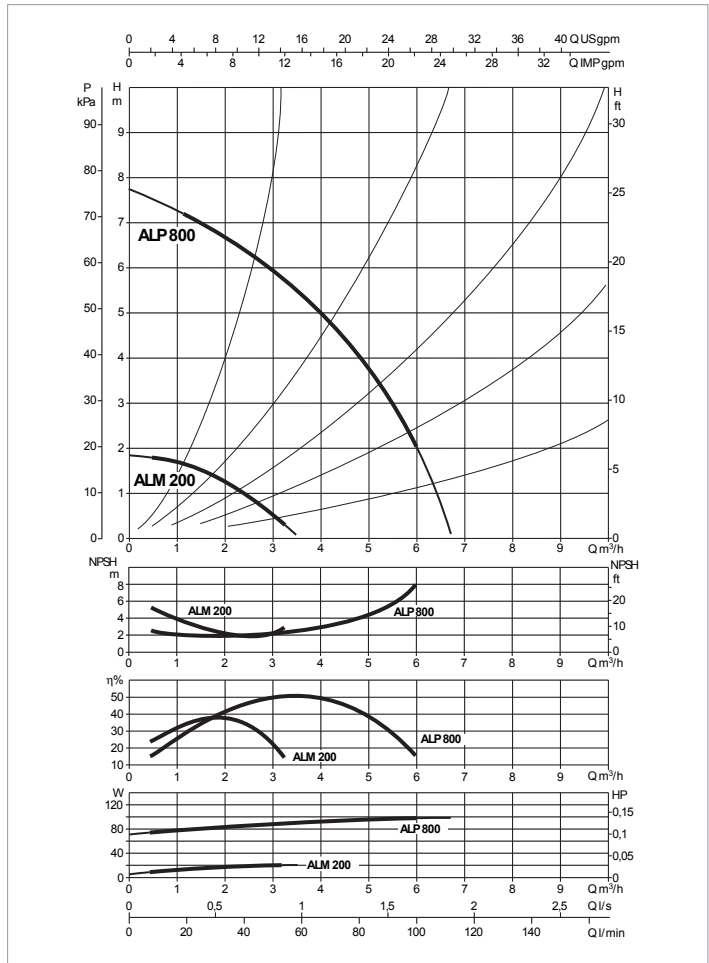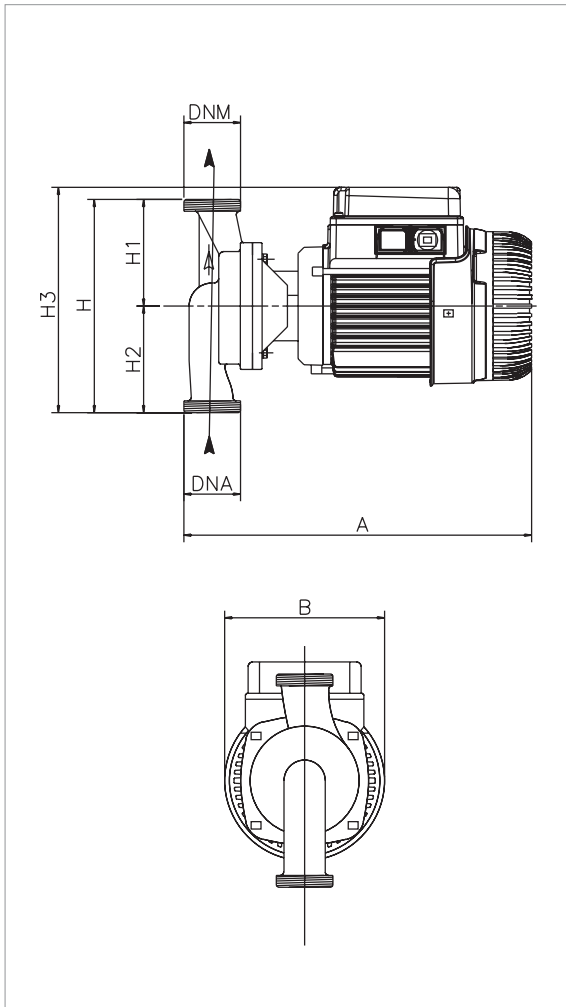

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	Q=m³h	0	1,2	2,4	3,6	4,8	6
	Q=l/min	0	20	40	60	80	100
ALM 200 M - T	H (m)	1,9	1,65	1			
ALP 800 M - T		7,7	7,2	6,3	5,8	3,9	2

MODEL	CENTRE DISTANCE	ELECTRICAL DATA								
		POWER INPUT 50 Hz	POLES	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A	CAPACITOR	
						kW	HP		µF	Vc
ALM 200 M	180	1x220-240 V ~	4	1480	0,14	0,059	0,08	0,7	8	450
ALM 200 T	180	3x230-400V~	4	1475	0,08	0,059	0,08	0,53-0,3	-	-
ALP 800 M	180	1x220-240 V ~	2	2925	0,24	0,37	0,5	1,4	10	450
ALP 800 T	180	3x230-400V~	2	2915	0,2	0,37	0,5	1,2-0,7	-	-

MODEL	A	B	C	L	∅	H	H1	H2	H3	DNA NPT	DNM NPT	PACKING DIMENSIONS			VOLUME (m³)	WEIGHT kg
												L/A	L/B	H		
ALM 200 M - T	300	136	-	-	-	180	90	90	190	1 1/2" G-M	1 1/2" G-M	332	202	257	0,017	7,5
ALP 800 M - T	300	136	-	-	-	180	90	90	190	1 1/2" G-M	1 1/2" G-M	332	202	257	0,017	7,5

ALM 500 / ALP 2000 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

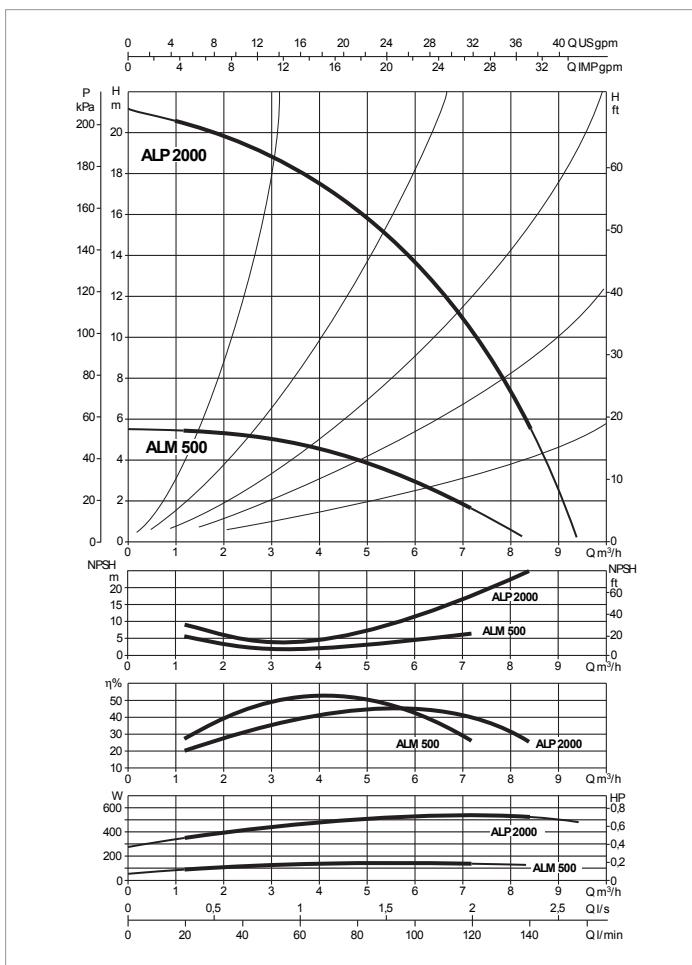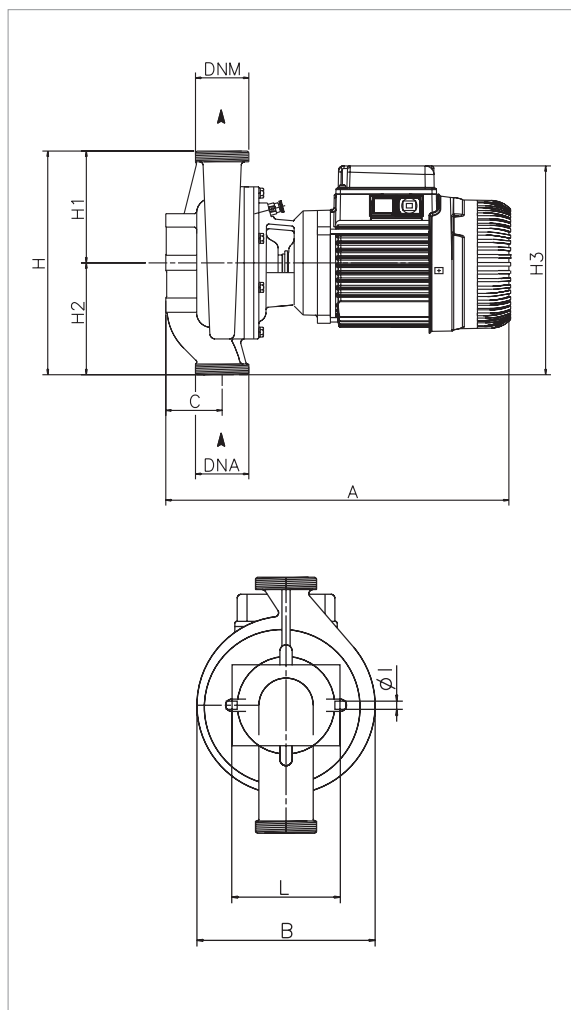

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	Q=m³h	0	1,2	2,4	3,6	4,8	6	7,2	8,4
	Q=l/min	0	20	40	60	80	100	120	140
ALM 500 M - T	H (m)	5,5	5,4	5,3	4,8	4,1	3	1,5	
ALP 2000 M - T		21,1	20,6	19,6	18	16	13,8	10,5	5,3

MODEL	CENTRE DISTANCE	ELECTRICAL DATA								
		POWER INPUT 50 Hz	POLES	n r.p.m.	P1 MAX W	P2 NOMINAL		In A	CAPACITOR	
						kW	HP		µF	Vc
ALM 500 M	250	1x220-240 V ~	4	1425	0,22	0,25	0,33	1	8	450
ALM 500 T	250	3x230-400V~	4	1465	0,19	0,25	0,33	1-0,6	-	-
ALP 2000 M	250	1x220-240 V ~	2	2870	0,75	0,75	1	3,7	16	450
ALP 2000 T	250	3x230-400V~	2	2830	0,74	0,55	0,75	2,3-1,3	-	-

MODEL	A	B	C	L	Ø	H	H1	H2	H3	DNA NPT	DNM NPT	PACKING DIMENSIONS			VOLUME (m³)	WEIGHT Kg
												L/A	L/B	H		
ALM 500 M - T	386	174	63	95	8	250	125	125	235	2" G-M	2" G-M	492	232	292	0,033	14,5
ALP 2000 M - T	386	174	63	95	8	250	125	125	235	2" G-M	2" G-M	492	232	292	0,033	14,5

KLM / KLP / DKLM / DKLP

IN-LINE PUMPS



TECHNICAL DATA

- Flow rate (range):** from 2 m³/h to 84 m³/h
- Head:** 23,4 m
- Type of pumped liquid:** clean, free from solid or abrasive substances, non-viscous, non-aggressive, non-crystallized and chemically neutral
- Glycol percentage (maximum):** 50%
- Liquid temperature (range):** from -15°C to +120°C
- Maximum room temperature:** +40°C
- Operation pressure (maximum):** 10 bar / 1000 kPa
- Flanging or threading:** flange DN 40, 50, 65, 80 with PN 6, 10, 16
- Motor efficiency class:** single phase: >=120 W IE2
Three phase: <0,75 kW IE2
>=0,75 kW up to 75 kW IE3
- Motor protection class:** IPX5
- Motor insulation class:** F
- Impeller material:** Technopolymer
- Single phase power input:** 230 V 50 Hz
- Three phase power input:** 3x230 V 50 Hz / 3x400 V 50 Hz
- Revolution per minute:** 1450 rpm for KLM - 2920 rpm for KLP
- Type of installation:** fixed in horizontal or vertical position with motor up
- Certification:** ACS

In-line pumps designed for conditioning, heating, water recirculation in the presence of solar thermal panels (solar collectors) and for the circulation of drinkable hot water in residential building service and commercial building service. Twin version available (the version with D letter). All the pumps are ACS certified.

CONSTRUCTION FEATURES OF THE PUMP

Flanged suction and delivery ports (PN 10) with threaded holes for control pressure gauges. Compatible with PN 16 counter-flanges for replacing pumps in existing systems. Pump body and motor support in cast iron. The twin versions are equipped with a swing valve incorporated in the delivery port to avoid the recirculation of water in the not working unit. The pumps are equipped with a blind flange in the event if the maintenance of one of the two motors is required. Technopolymer impeller, silicon carbide/silicon carbide seal.


CONSTRUCTION FEATURES OF THE MOTOR

Two-pole air-cooled asynchronous motor for KLP versions, four-pole for KLM. Motor shaft in AISI 306 stainless steel mounted on ball bearings. Single-phase version with capacitor and built-in thermo-amperometric protection. The user is responsible for the protection of the three-phase version.

MATERIALS

N.	PARTS*	MATERIALS
1	PUMP BODY	CAST IRON 250 UNI ISO 185
3	SUPPORT	CAST IRON 250 UNI ISO 185
4	IMPELLER	TECHNOPOLYMER B
7	SHAFT WITH ROTOR	AISI 316 STAINLESS STEEL
16	MECHANICAL SEAL	SILICON CARBIDE / SILICON CARBIDE
26	OR RING	EPDM RUBBER


* In contact with the liquid

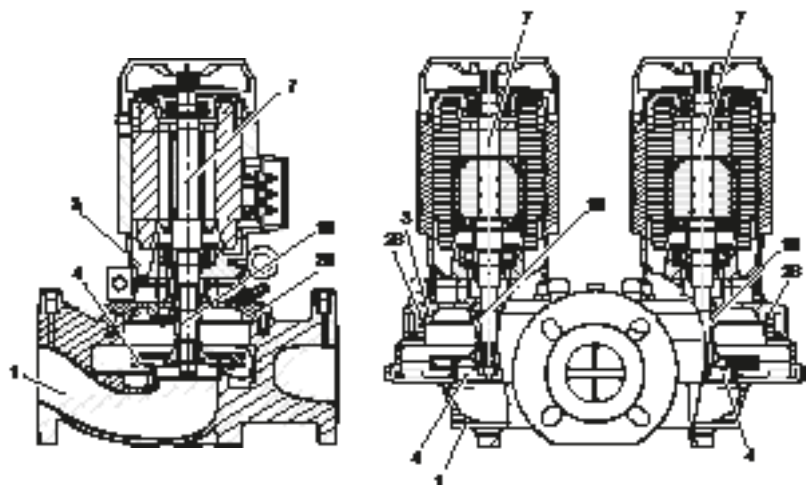

KLM / KLP / DKLM / DKLP



IN-LINE PUMPS

– Denomination index:
(example)



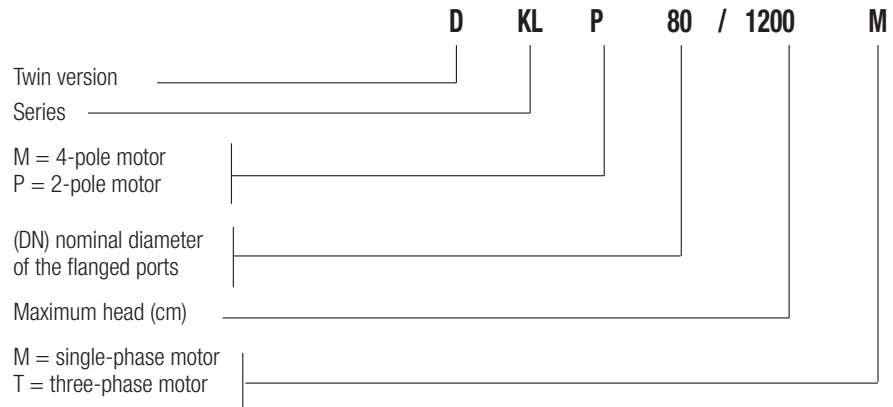


Installation: horizontal or vertical position, provided that the motor is always above the pump.

KLM / KLP



DKLM / DKLP




IN-LINE PUMPS

FOR CIRCULATION SYSTEMS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

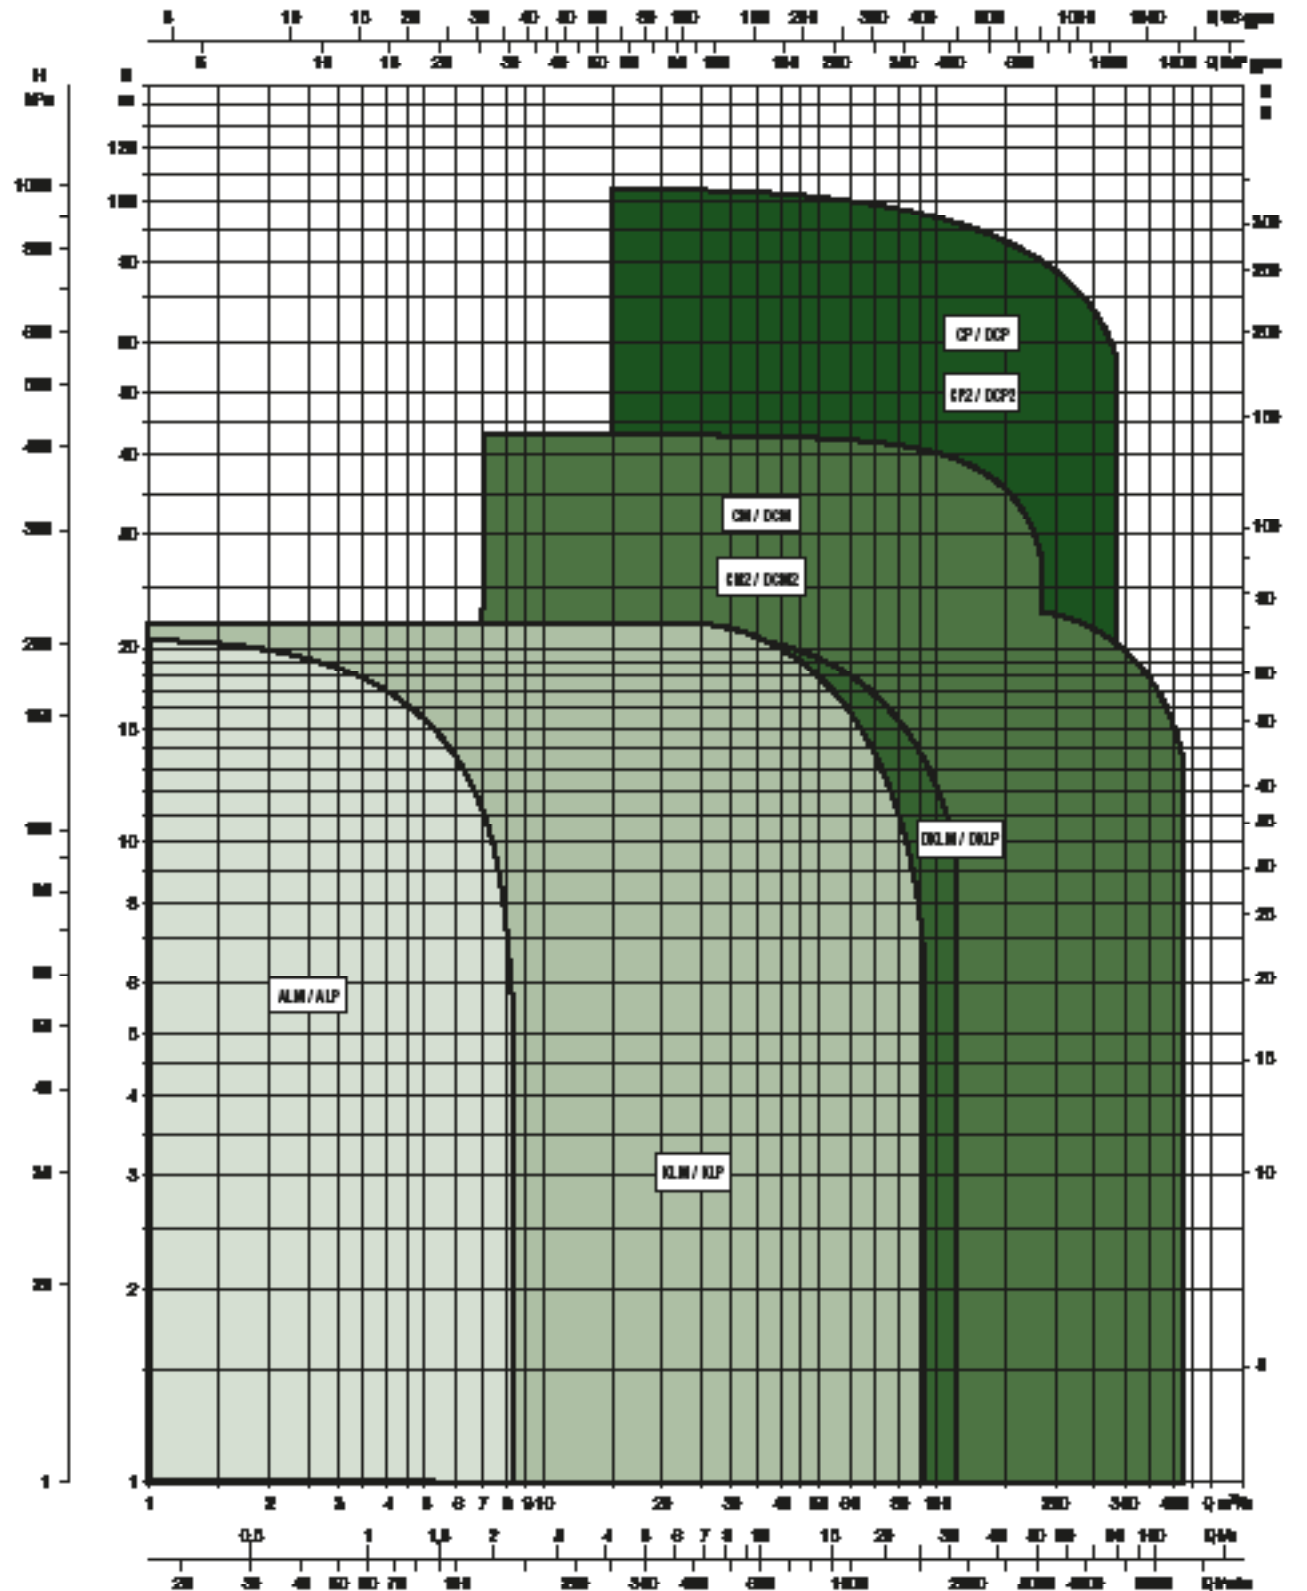

SELECTION TABLE - KLM / KLP

MODEL	Q=m ³ h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60	
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000	
KLM 40-300 M	H (m)	4,1	3,9	3,7	3,5	3,1	2,7	2,2	1,5										
KLM 40-300 T		4,1	3,9	3,7	3,5	3,1	2,7	2,2	1,5										
KLP 40-600 M		8,3	8,2	8	7,9	7,7	7,4	7	6,6	5,4	3,8	2							
KLP 40-600 T		8,3	8,2	8	7,9	7,7	7,4	7	6,6	5,4	3,8	2							
KLP 40-900 M		10,7	10,7	10,6	10,5	10,3	10	9,7	9,2	8,1	6,6	4,9	3,9						
KLP 40-900 T		10,6	10,6	10,4	10,3	10	9,7	9,3	8,8	7,6	6	4,4	3,4						
KLP 40-1200 M		14,3	13,9	13,7	13,5	13,2	12,9	12,5	12	10,8	9,2	7,1	6						
KLP 40-1200 T		13,9	13,4	13,2	13	12,6	12,3	11,8	11,3	9,9	8,2	6,2	5						
KLP 40-1600 M		16,5	16,2	15,9	15,6	15,3	14,9	14,5	14	12,9	11,3	9,3	8						
KLP 40-1600 T		16,5	16,2	15,9	15,6	15,3	14,9	14,5	14	12,9	11,3	9,3	8						
KLP 40-1800 M		18,9	18,5	18,2	17,8	17,5	17	16,6	16	14,7	13	11	9,9	2,7					
KLP 40-1800 T		18,9	18,5	18,2	17,8	17,5	17	16,6	16	14,7	13	11	9,9	2,7					

MODEL	Q=m ³ h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60	
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000	
KLM 50-300 M	H (m)	3	3	2,9	2,9	2,8	2,6	2,5	2,3	1,8	1,2	0,5							
KLM 50-300 T		3	3	2,9	2,9	2,8	2,6	2,5	2,3	1,8	1,2	0,5							
KLM 50-600 T		5,8	5,8	5,7	5,6	5,5	5,4	5,2	5	4,5	4	3,2	2,8						
KLP 50-900 M		9,3	9,3	9,3	9,2	9	8,9	8,7	8,5	8	7,5	6,8	6,3	3,8					
KLP 50-900 T		9,3	9,3	9,3	9,2	9	8,9	8,7	8,5	8	7,5	6,8	6,3	3,8					
KLP 50-1200 M		12,2	12,2	12,2	12,1	12	11,9	11,73	11,5	11	10,3	9,5	9,1	6,6	3,8				
KLP 50-1200 T		12,2	12,2	12,2	12,1	12	11,9	11,73	11,5	11	10,3	9,5	9,1	6,6	3,8				
KLP 50-1600 M		16,2	16	15,9	15,8	15,6	15,5	15,3	15,1	14,6	13,9	13	12,6	10	7,1	3,9			
KLP 50-1600 T		16,2	16	15,9	15,8	15,6	15,5	15,3	15,1	14,6	13,9	13	12,6	10	7,1	3,9			
KLP 50-2000 M		23,4	23,3	23,3	23,2	23,2	23,1	22,9	22,8	22,3	21,7	21	20,6	18,2	15,3	12			
KLP 50-2000 T		23,4	23,3	23,3	23,2	23,2	23,1	22,9	22,8	22,3	21,7	21	20,6	18,2	15,3	12			

MODEL	Q=m ³ h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60	
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000	
KLM 65-300 T	H (m)	3,1	3	3	3	3	2,9	2,9	2,8	2,5	2,2	1,7	1,5						
KLM 65-600 T		5,1	5,1	5,1	5,1	5	5	4,9	4,8	4,5	4,2	3,8	3,6	2,1					
KLP 65-900 T		9,3	9,4	9,4	9,4	9,4	9,4	9,4	9,3	9,2	9,1	8,9	8,7	7,7	6	3,6			
KLP 65-1200 T		12,3	12,3	12,3	12,3	12,3	12,2	12,2	12,2	12,2	12,1	12	12	11	9,2	6,8			
KLP 65-1600 T		17,2	17,2	17,2	17,2	17,2	17,2	17,2	17,2	17,2	17,2	17	16,9	15,8	14,1	11,9	6,3		
KLP 65-2000 T		20,6	20,7	20,7	20,7	20,7	20,7	20,7	20,6	20,6	20,5	20,3	20	19,8	18,8	17,2	15,1	9,7	

MODEL	Q=m ³ h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60	72	84	
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000	1200	1400	
KLM 80-300 T	H (m)	3,1	3,1	3,1	3,1	3,1	3,1	3,1	3,1	3	3	3	2,5	2	1,1						
KLM 80-600 T		5,6	5,7	5,7	5,8	5,8	5,8	5,8	5,8	5,8	5,8	5,7	5,7	5,4	5	4,3	2,4				
KLP 80-900 T		8,8	8,8	8,8	8,8	8,8	8,8	8,8	8,7	8,7	8,7	8,6	8,6	8,4	8	7,5	6	3,6			
KLP 80-1200 T		11,8	11,7	11,7	11,7	11,7	11,7	11,7	11,7	11,6	11,6	11,6	11,6	11,5	11,3	11	9,8	7,4	4,2		
KLP 80-1600 T		16,2	16,2	16,2	16,3	16,3	16,3	16,3	16,3	16,3	16,3	16,3	16,3	16,2	16	15,5	14	11,5	8,7	5,3	
KLP 80-2000 T		20,8	20,9	20,9	21	21	21	21	21	21,1	21,1	21,1	21,1	21,1	21	20,6	19,3	17,4	14,8	11,7	

SELECTION TABLE - DKLM / DKLP

MODEL	Q=m ³ h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60	
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000	
DKLM 40-300 M	H (m)	3,6	3,4	3,2	2,9	2,6	2,1	1,6	1										
DKLM 40-300 T		3,6	3,4	3,2	2,9	2,6	2,1	1,6	1										
DKLP 40-600 M		8,3	8	7,8	7,5	7,1	6,6	6	5,4	3,9	1,9								
DKLP 40-600 T		8,3	8	7,8	7,5	7,1	6,6	6	5,4	3,9	1,9								
DKLP 40-900 M		10,6	10,5	10,2	10	9,7	9,2	8,7	8	6,4	4,5	2,5							
DKLP 40-900 T		10,6	10,5	10,2	10	9,7	9,2	8,7	8	6,4	4,5	2,5							
DKLP 40-1200 M		14,3	13,9	13,6	13,2	12,8	12,3	11,8	11,1	9,4	7,5	5,3	4,1						
DKLP 40-1200 T		14,3	13,9	13,6	13,2	12,8	12,3	11,8	11,1	9,4	7,5	5,3	4,1						
DKLP 40-1600 M		16,5	16,2	16	15,6	15,2	14,7	14,1	13,5	11,9	9,8	7,5	6,1						
DKLP 40-1600 T		16,5	16,2	16	15,6	15,2	14,7	14,1	13,5	11,9	9,8	7,5	6,1						
DKLP 40-1800 M		19,1	18,6	18,2	17,8	17,3	16,7	16,1	15,4	13,6	11,5	9,1	7,7						
DKLP 40-1800 T		19,1	18,6	18,2	17,8	17,3	16,7	16,1	15,4	13,6	11,5	9,1	7,7						



MODEL	Q=m ³ h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60	
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000	
DKLM 50-300 M	H (m)	3	2,9	2,8	2,6	2,5	2,3	2	1,8	1,2	0,5								
DKLM 50-300 T		3	2,9	2,8	2,6	2,5	2,3	2	1,8	1,2	0,5								
DKLM 50-600 T		5,7	5,5	5,4	5,3	5,1	4,9	4,6	4,2	3,6	2,9	2	1,6						
DKLP 50-900 M		9,5	9,3	9,2	9	8,8	8,6	8,3	8	7,4	6,6	5,7	5,2	2,4					
DKLP 50-900 T		9,5	9,3	9,2	9	8,8	8,6	8,3	8	7,4	6,6	5,7	5,2	2,4					
DKLP 50-1200 M		12,3	12	11,9	11,7	11,5	11,3	11	10,8	10,1	9,3	8,4	7,9	5					
DKLP 50-1200 T		12,3	12	11,9	11,7	11,5	11,3	11	10,8	10,1	9,3	8,4	7,9	5					
DKLP 50-1600 M		16,1	15,8	16,5	15,3	15	14,8	14,5	14,1	13,3	12,4	11,4	10,8	7,6	3,6				
DKLP 50-1600 T		16,1	15,8	16,5	15,3	15	14,8	14,5	14,1	13,3	12,4	11,4	10,8	7,6	3,6				
DKLP 50-2000 M		23,2	23	22,8	22,6	22,3	22	21,6	21,3	20,4	19,5	18,5	17,9	14,8	11,2	7			
DKLP 50-2000 T		23,2	23	22,8	22,6	22,3	22	21,6	21,3	20,4	19,5	18,5	17,9	14,8	11,2	7			

MODEL	Q=m ³ h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60	72	84	
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000	1200	1400	
DKLM 65-300 T	H (m)	3,2	3,1	3,1	3,1	3,1	3	3	2,9	2,6	2,3	2	1,7								
DKLM 65-600 T		5,1	5,1	5,1	5	5	4,8	4,7	4,5	4,2	3,8	3,3	3,1	1,7							
DKLP 65-900 T		9,5	9,5	9,5	9,5	9,4	9,4	9,3	9,2	9,1	8,9	8,6	8,4	7,3	5,6	3,5					
DKLP 65-1200 T		12,4	12,3	12,3	12,2	12,1	12,1	12	12	11,9	11,7	11,5	11,4	10,2	8,3	6					
DKLP 65-1600 T		17	16,9	16,9	16,9	16,8	16,7	16,6	16,6	16,4	16,2	16	15,8	14,6	12,7	10,4	5,1				
DKLP 65-2000 T		20,4	20,2	20,1	20	20	20	19,9	19,8	19,7	19,4	19,1	19	17,5	15,5	13	7,8				

MODEL	Q=m ³ h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60	72	84	96	108		
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000	1200	1400	1600	1800		
DKLM 80-300 T	H (m)	3,5	3,5	3,4	3,4	3,4	3,3	3,3	3,2	3,1	3	2,8	2,7	2,2	1,5									
DKLM 80-600 T		5,6	5,6	5,6	5,6	5,6	5,6	5,5	5,5	5,4	5,3	5,2	5	4,6	3,9	3,1								
DKLP 80-900 T		8,9	8,8	8,8	8,7	8,7	8,6	8,5	8,5	8,3	8,2	8	7,9	7,3	6,6	5,7	3,4							
DKLP 80-1200 T		11,9	11,8	11,8	11,8	11,7	11,7	11,6	11,6	11,5	11,3	11,2	11,1	10,5	9,7	8,8	4,5	3,9						
DKLP 80-1600 T		16,3	16,2	16,2	16,1	16	16	15,9	15,8	15,6	15,5	15,3	15,2	14,9	14,4	13,7	11,6	8,7	5,1					
DKLP 80-2000 T		20,3	20,3	20,3	20,3	20,3	20,3	20,3	20,3	20,3	20,2	20,2	20,1	19,9	19,4	18,8	16,8	13,9	10,4					

KLM / KLP 40 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

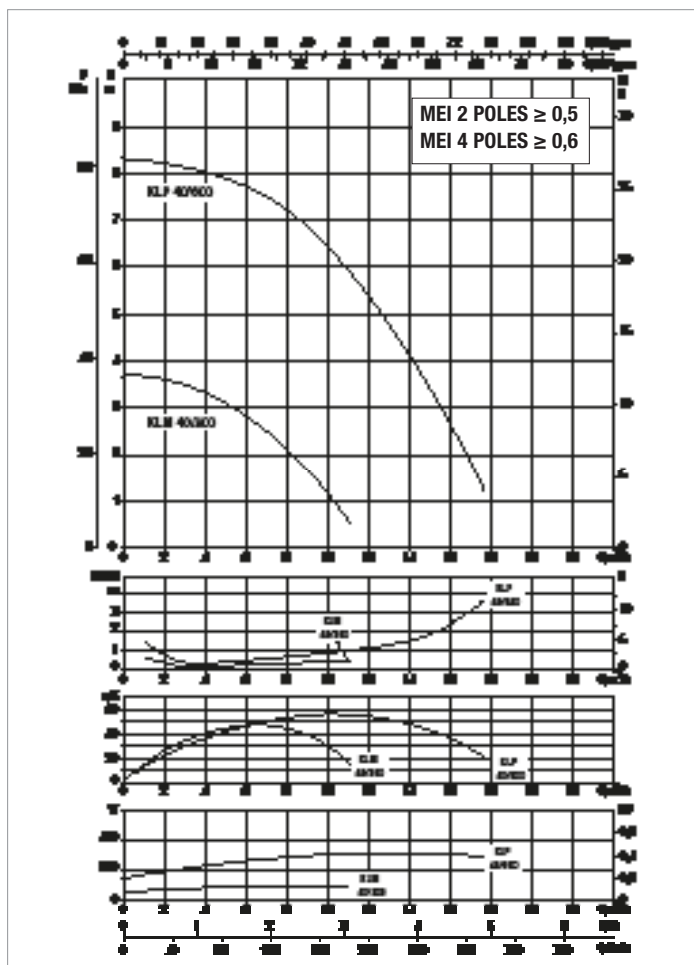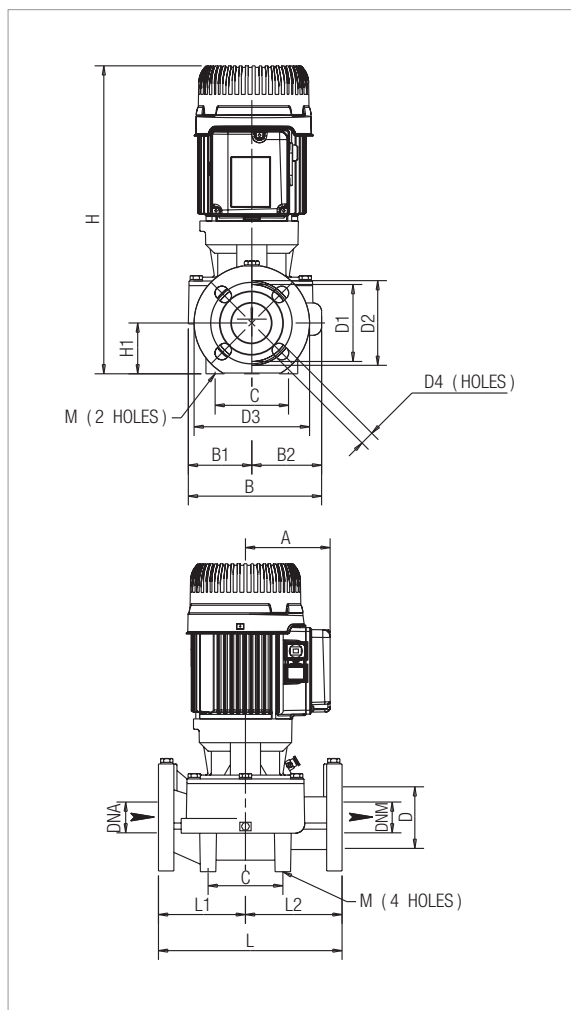



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	POLES	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR		
							kW	HP		µF	Vc	
KLM 40-300 M	250	DN 40	1 x 220 - 240V ~	4	1420	0,2	0,1	0,14	1,12	8	450	
KLM 40-300 T	250	DN 40	3 x 230 - 400V ~	4	1466	0,16	0,1	0,14	1,04-0,6	-	-	
KLP 40-600 M	250	DN 40	1 x 220 - 240V ~	2	2937	0,5	0,75	1	2,5	20	450	
KLP 40-600 T	250	DN 40	3 x 230 - 400V ~	2	2898	0,49	0,3	0,41	2,13-1,23	-	-	

MODEL	PACKING DIMENSIONS																VOLUME (m³)	WEIGHT Kg					
	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1			L2	M			
	L/A	L/B	H																				
KLM 40/300 M	110	179	82	97	100	40	40	80	100	110	150	4 HOLES 18x23	396	66	250	125	125	2 HOLES 10	470	280	330	0,043	21,1
KLM 40/300 T	110	179	82	97	100	40	40	80	100	110	150		396	66	250	125	125		470	280	330	0,043	20,1
KLP 40/600 M-T	110	179	82	97	100	40	40	80	100	110	150		396	66	250	125	125		470	280	330	0,043	22,5

KLM / KLP 40 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

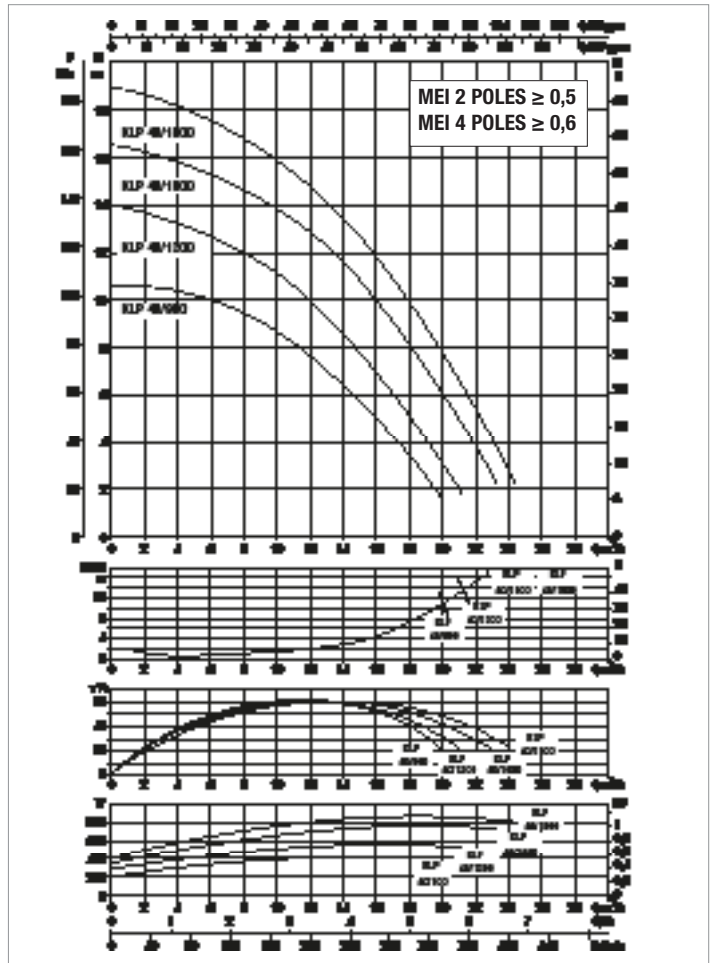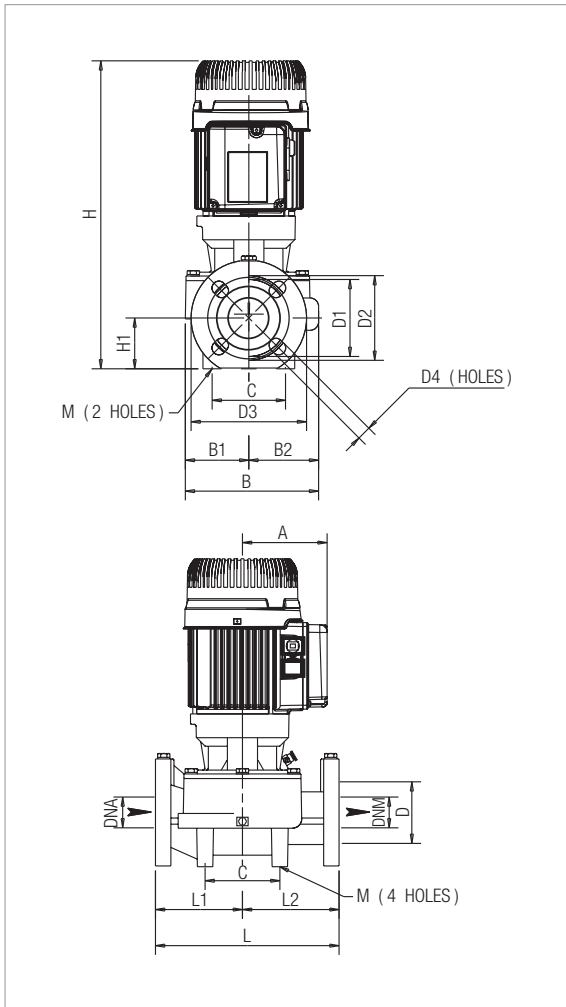



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
								kW	HP		µF	Vc
KLP 40-900 M	250	DN 40	1 x 220 - 240 V ~	2	-	2913	0,6	0,75	1	3,75	20	450
KLP 40-900 T	250	DN 40	3 x 230 - 400 V ~	2	-	2851	0,63	0,41	0,56	2,37-1,37	-	-
KLP 40-1200 M	250	DN 40	1 x 220 - 240 V ~	2	-	2873	0,79	0,75	1	3,6	20	450
KLP 40-1200 T	250	DN 40	3 x 230 - 400 V ~	2	-	2776	0,82	0,54	0,73	2,70-1,56	-	-
KLP 40-1600 M	250	DN 40	1 x 220 - 240 V ~	2	-	2812	0,91	0,75	1	4,1	20	450
KLP 40-1600 T	250	DN 40	3 x 230 - 400 V ~	2	IE3	2840	0,96	0,75	1,01	3,44-1,91	-	-
KLP 40-1800 M	250	DN 40	1 x 220 - 240 V ~	2	-	2812	1	0,75	1	4,4	20	450
KLP 40-1800 T	250	DN 40	3 x 230 - 400 V ~	2	IE3	2841	1,09	0,85	1,15	3,29-1,88	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m³)	WEIGHT Kg
																			L/A	L/B	H		
KLP 40-900 M-T	110	179	82	97	100	40	40	80	100	110	150	4 HOLES 18x23	396	66	250	125	125	2 HOLES 10	470	280	330	0,043	22,5
KLP 40-1200 M-T	110	179	82	97	100	40	40	80	100	110	150		396	66	250	125	125		470	280	330	0,043	23,2
KLP 40-1600 M-T	110	179	82	97	100	40	40	80	100	110	150		396	66	250	125	125		470	280	330	0,043	23,5
KLP 40-1800 M-T	110	179	82	97	100	40	40	80	100	110	150		396	66	250	125	125		470	280	330	0,043	24,5

KLM / KLP 50 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

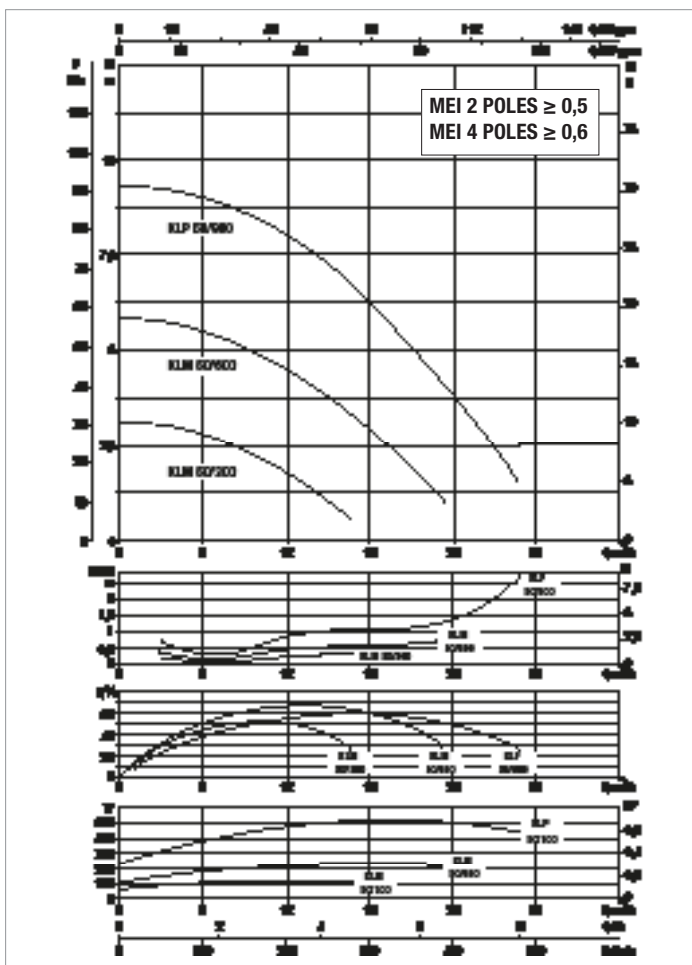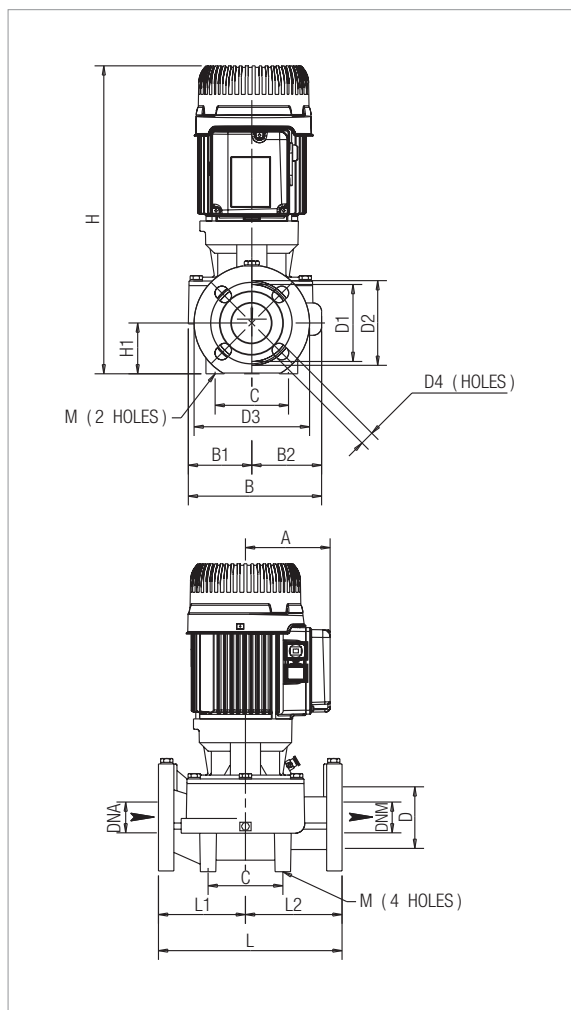



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
								kW	HP		μF	Vc
KLM 50-300 M	280	DN 50	1 x 220 - 240 V ~	4	-	1410	0,21	0,11	0,15	1,1	8	450
KLM 50-300 T	280	DN 50	3 x 230 - 400 V ~	4	-	1463	0,17	0,11	0,15	1,02-0,59	-	-
KLM 50-600 T	280	DN 50	3 x 230 - 400 V ~	4	-	1399	0,34	0,22	0,3	1,28-0,74	-	-
KLP 50-900 M	280	DN 50	1 x 220 - 240 V ~	2	-	2898	0,75	0,75	1	3,4	20	450
KLP 50-900 T	280	DN 50	3 x 230 - 400 V ~	2	IE3	2897	0,67	0,51	0,69	3,39-1,96	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m ³)	WEIGHT Kg
																			L/A	L/B	H		
KLM 50-300 M-T	110	204	94	110	100	50	50	90	110	125	165	4 HOLES 18x25,5	414	73	280	140	170	2 HOLES 10	470	280	330	0,043	24,2
KLM 50-600 T	110	204	94	110	100	50	50	90	110	125	165		414	73	280	140	170		470	280	330	0,043	24,6
KLP 50-900 M-T	110	204	94	110	100	50	50	90	110	125	165		414	73	280	140	170		470	280	330	0,043	26,5

KLM / KLP 50 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

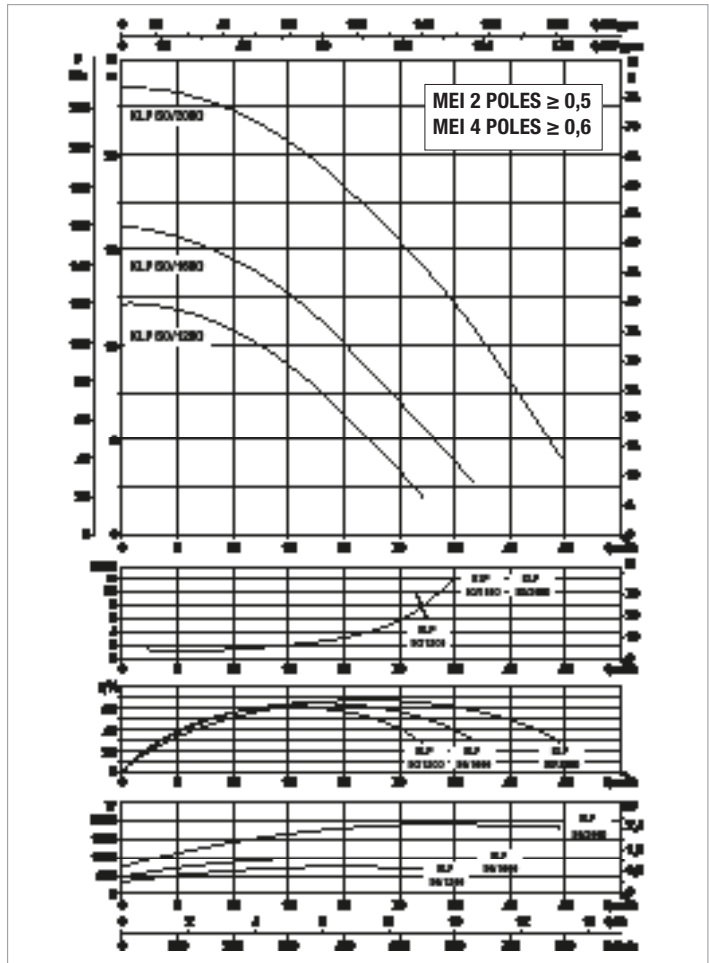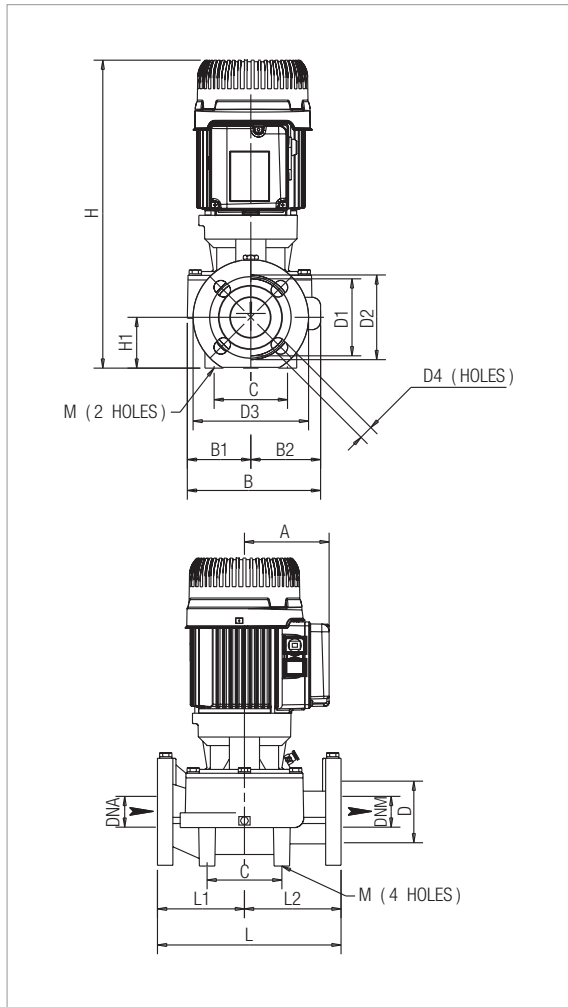



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
								kW	HP		µF	Vc
KLP 50-1200 M	280	DN 50	1 x 220 - 240V ~	2	-	2840	0,99	0,75	1	4,3	20	450
KLP 50-1200 T	280	DN 50	3 x 230 - 400V ~	2	IE3	2842	0,92	0,72	0,97	3,72-2,15	-	-
KLP 50-1600 M	280	DN 50	1 x 220 - 240V ~	2	-	2844	1,56	1,01	1,37	7,15	40	450
KLP 50-1600 T	280	DN 50	3 x 230 - 400V ~	2	IE3	2746	1,32	1,01	1,38	4,05-2,32	-	-
KLP 50-2000 M	280	DN 50	1 x 220 - 240V ~	2	-	2754	2,43	1,83	2,49	11,06	40	450
KLP 50-2000 T	280	DN 50	3 x 230 - 400V ~	2	IE3	2832	2,34	1,83	2,49	6,77-3,9	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m ³)	WEIGHT Kg
																			L/A	L/B	H		
KLP 50-1200 M-T	110	204	94	110	100	50	50	90	110	125	165	4 HOLES 18x25,5	414	73	280	140	170	2 HOLES 10	470	280	330	0,043	26,6
KLP 50-1600 M-T	110	204	94	110	100	50	50	90	110	125	165		414	73	280	140	170		470	280	330	0,043	26,7
KLP 50-2000 M-T	115	204	94	110	100	50	50	90	110	125	165		423	73	280	140	170		510	310	470	0,074	33

KLM / KLP 65 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

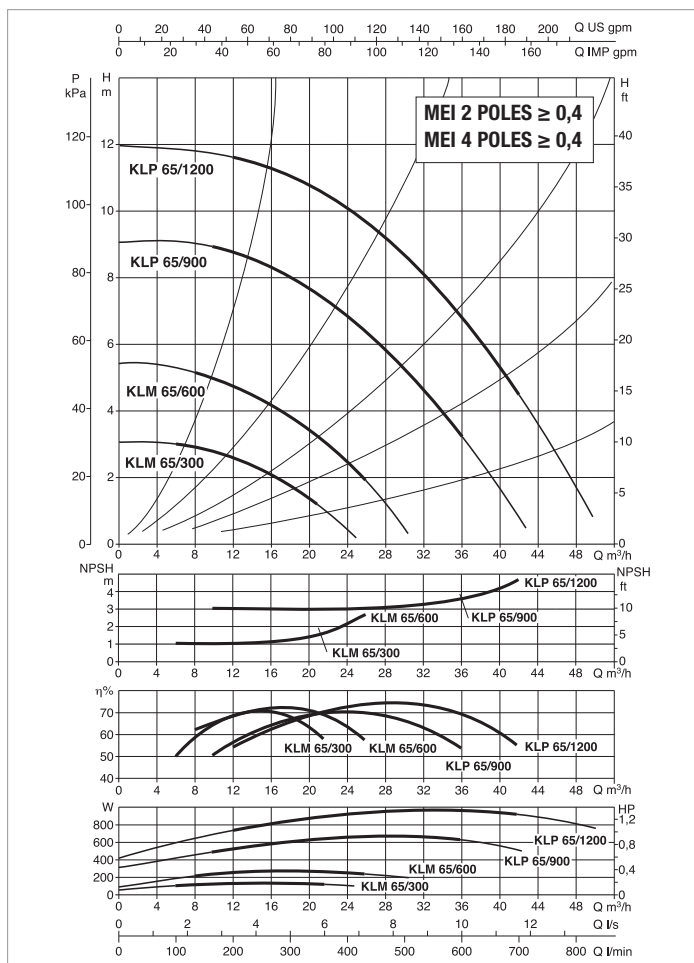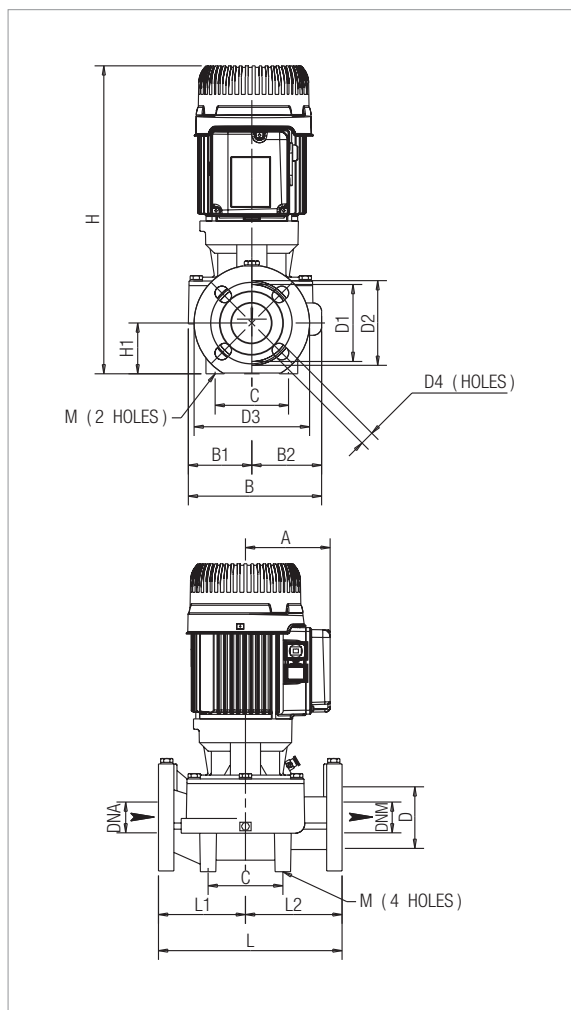



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA							
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
								kW	HP	
KLM 65-300 T	340	DN 65	3 x 230 - 400V ~	4	-	1445	0,22	0,15	0,2	1,07-0,62
KLM 65-600 T	340	DN 65	3 x 230 - 400V ~	4	-	1391	0,36	0,24	0,33	1,30-0,75
KLP 65-900 T	340	DN 65	3 x 230 - 400V ~	2	IE3	2937	0,99	0,8	1,09	5,05-2,92

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m³)	WEIGHT Kg
																			L/A	L/B	H		
KLM 65-300 T	110	228	99	129	100	65	65	110	130	145	185	4 HOLES 18x25,5	433	82	340	170	170	2 HOLES 12	510	310	470	0,074	29,3
KLM 65-600 T	110	228	99	129	100	65	65	110	130	145	185		433	82	340	170	170		510	310	470	0,074	29,5
KLP 65-900 T	114	228	99	129	100	65	65	110	130	145	185		433	82	340	170	170		510	310	470	0,074	35

KLM / KLP 65 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

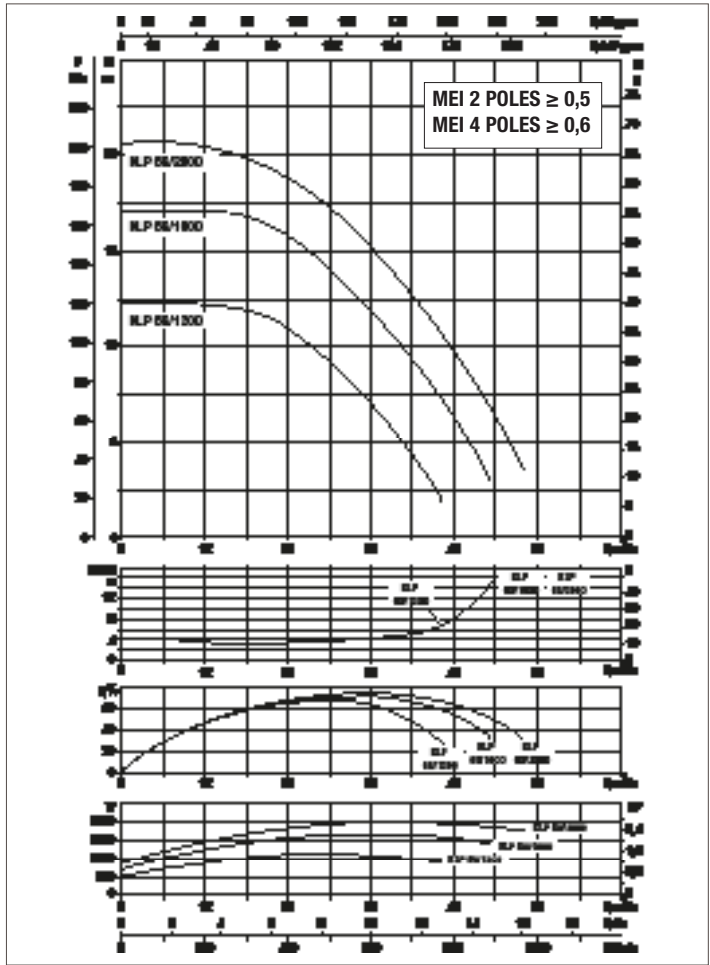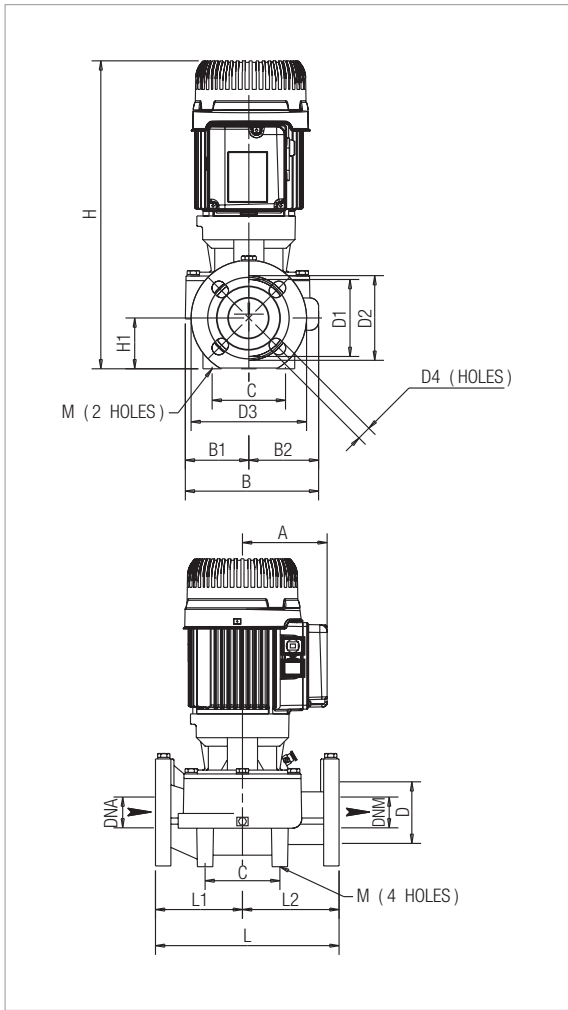



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA							
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
								kW	HP	
KLP 65-1200 T	340	DN 65	3 x 230 - 400 V ~	2	IE3	2910	1,34	1,12	1,52	5,64-3,26
KLP 65-1600 T	340	DN 65	3 x 230 - 400 V ~	2	IE3	2863	1,99	1,65	2,25	6,49-3,75
KLP 65-2000 T	340	DN 65	3 x 230 - 400 V ~	2	IE3	2828	2,51	2	2,72	7,7-4,5

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m³)	WEIGHT Kg
																			L/A	L/B	H		
KLP 65-1200 T	114	228	99	129	100	65	65	110	130	145	185	4 HOLES 18x25,5	433	82	340	170	170	2 HOLES 10	510	310	470	0,074	35,1
KLP 65-1600 T	114	228	99	129	100	65	65	110	130	145	185		433	82	340	170	170		510	310	470	0,074	35,2
KLP 65-2000 T	118	228	99	129	100	65	65	110	130	145	185		517	82	340	170	170		520	290	700	0,104	38,2

KLM / KLP 80 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

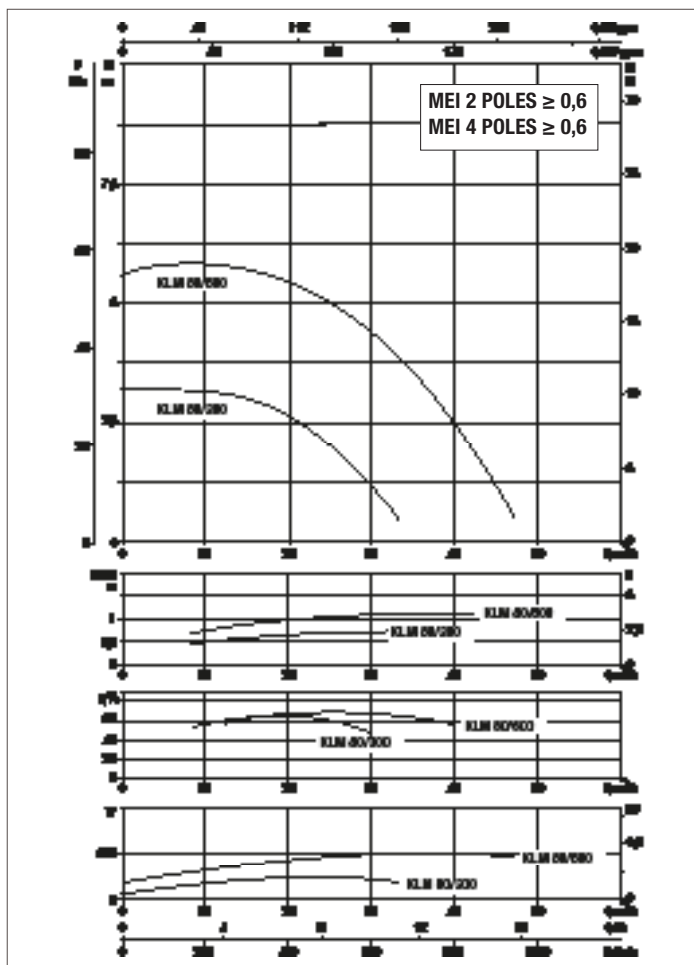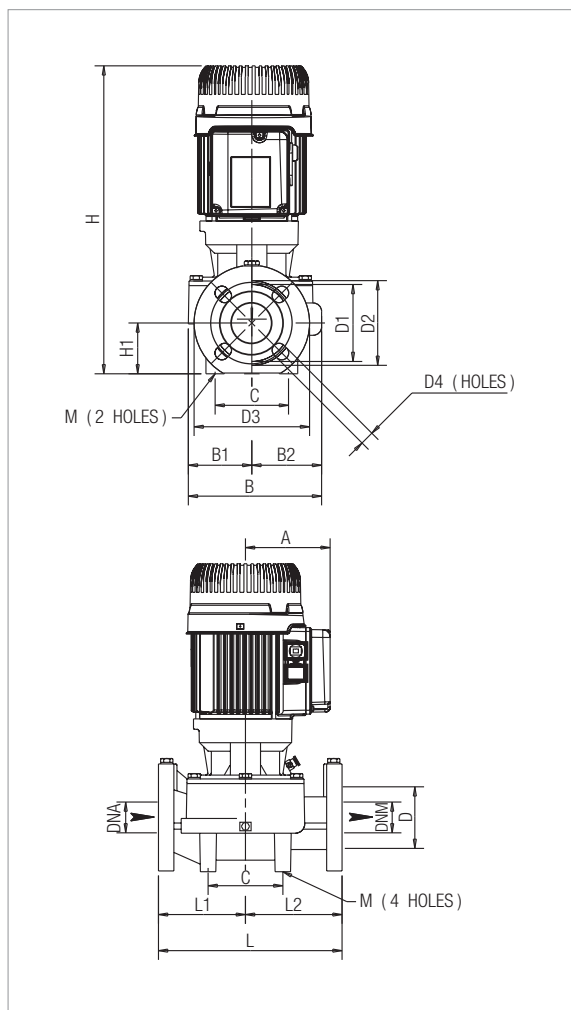



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA							
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
								kW	HP	
KLM 80-300 T	360	DN 80	3 x 230 - 400 V ~	4	-	1460	0,36	0,25	0,33	1,2-0,7
KLM 80-600 T	360	DN 80	3 x 230 - 400 V ~	4	IE3	1400	0,75	0,75	1	2,8-1,6

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m³)	WEIGHT Kg
																			L/A	L/B	H		
KLM 80-300 T	110	229	99	130	115	80	80	128	150	160	200	4 HOLES 18x23	453	97	360	190	170	2 HOLES	510	310	470	0,074	32,5
KLM 80-600 T	110	229	99	130	115	80	80	128	150	160	200	4 HOLES 18x23	453	97	360	190	170	12 HOLES	510	310	470	0,074	36,7

KLM / KLP 80 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

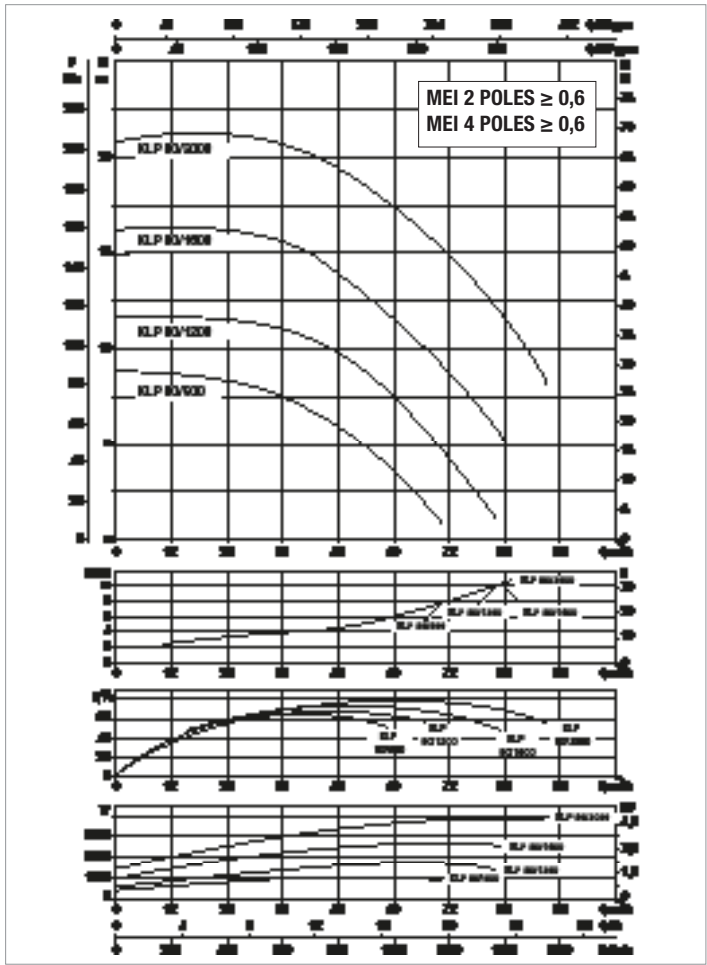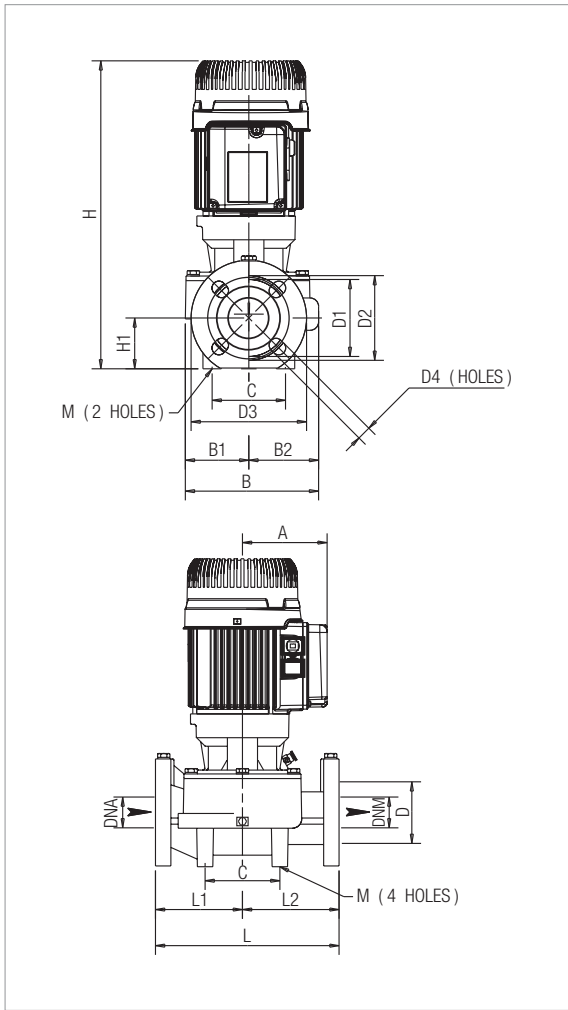



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA							
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
			50 Hz					kW	HP	
KLP 80-900 T	360	DN 80	3 x 230 - 400 V ~	2	IE3	2920	1,4	1,84	2,5	5,2-3,51
KLP 80-1200 T	360	DN 80	3 x 230 - 400 V ~	2	IE3	2840	2,1	1,84	2,5	6,6-4,31
KLP 80-1600 T	360	DN 80	3 x 230 - 400 V ~	2	IE3	2796	3,2	2,55	3,5	10,28-5,94
KLP 80-2000 T	360	DN 80	3 x 230 - 400 V ~	2	IE3	2868	4,72	3,67	5	14,9-8,42

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m³)	WEIGHT Kg
																			L/A	L/B	H		
KLP 80-900 T	118	229	99	130	115	80	80	128	150	160	200	4 HOLES 18x23	537	97	360	190	170	2 HOLES 12	520	290	700	0,104	40
KLP 80-1200 T	118	229	99	130	115	80	80	128	150	160	200		537	97	360	190	170		520	290	700	0,104	41
KLP 80-1600 T	118	229	99	130	115	80	80	128	150	160	200		537	97	360	190	170		520	290	700	0,104	42
KLP 80-2000 T	135	229	99	130	115	80	80	128	150	160	200		526	97	360	190	170		520	290	700	0,104	48

DKLM / DKLP 40 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

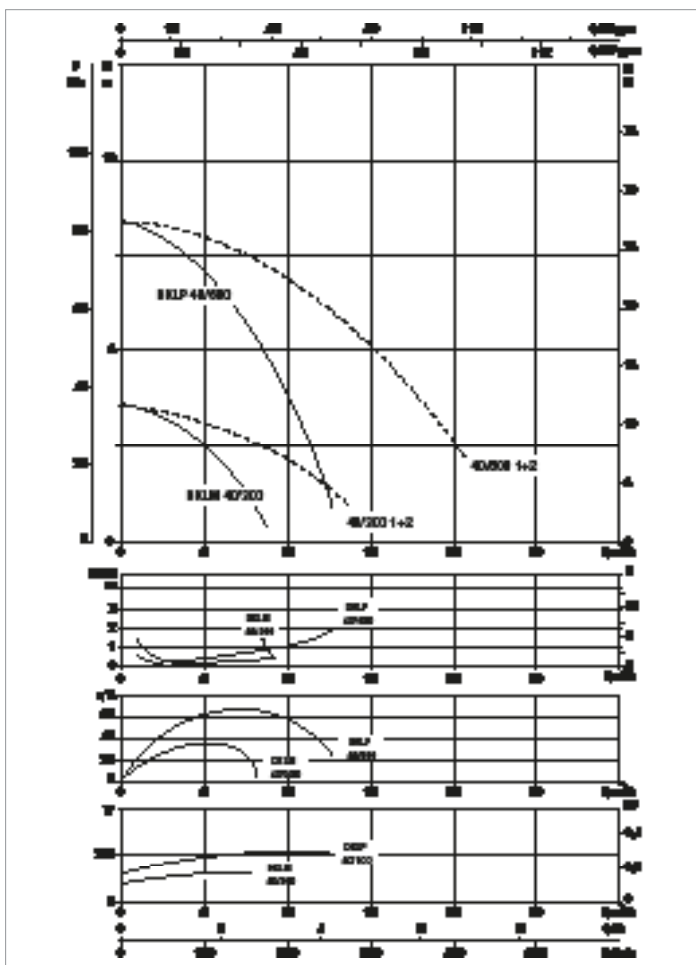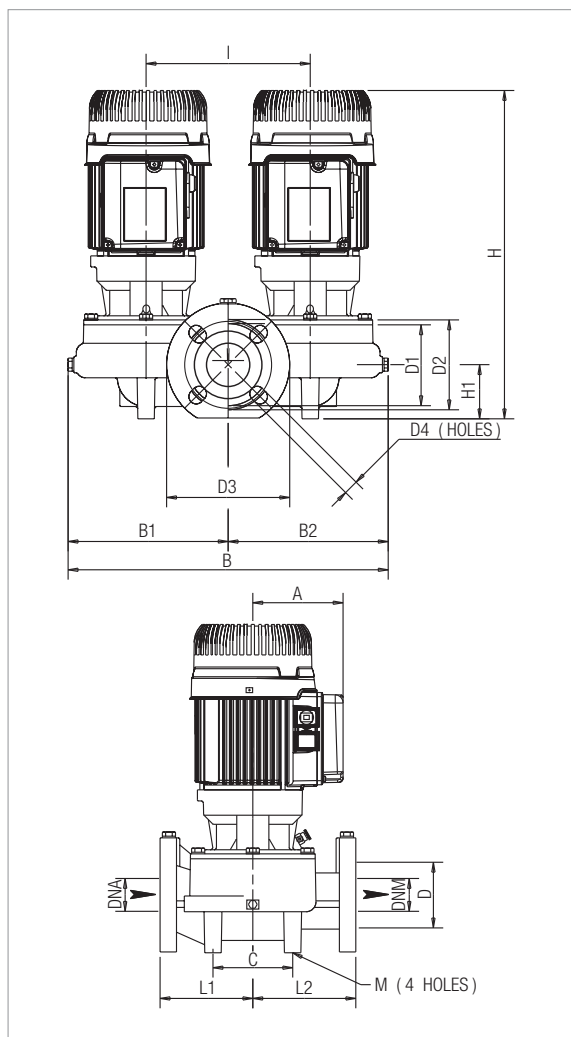



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
								kW	HP		μF	Vc
DKLM 40-300 M	250	DN 40	1 x 220 - 240 V ~	4	-	1420	0,19	0,1	0,14	1,12	8	450
DKLM 40-300 T	250	DN 40	3 x 230 - 400 V ~	4	-	1466	0,14	0,1	0,14	1,04-0,6	-	-
DKLP 40-600 M	250	DN 40	1 x 220 - 240 V ~	2	-	2937	0,58	0,3	0,41	3,29	20	450
DKLP 40-600 T	250	DN 40	3 x 230 - 400 V ~	2	-	2898	0,39	0,3	0,41	2,13-1,23	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m ³)	WEIGHT Kg
																				L/A	L/B	H		
DKLM 40-300 M-T	110	437	217	220	100	40	40	80	100	110	150	4 HOLES 18x23	396	66	200	250	125	125	4 HOLES 10	530	280	470	0,07	38,2
DKLP 40-600 M-T	110	437	217	220	100	40	40	80	100	110	150	4 HOLES 18x23	396	66	200	250	125	125	4 HOLES 10	530	280	470	0,07	41,8

DKLM / DKLP40 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

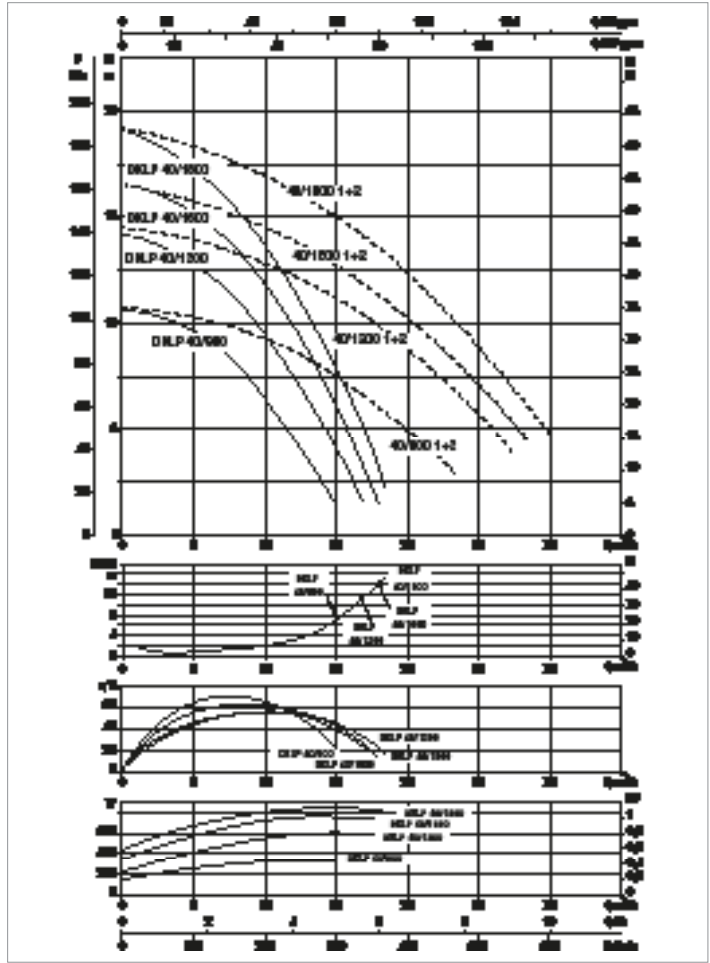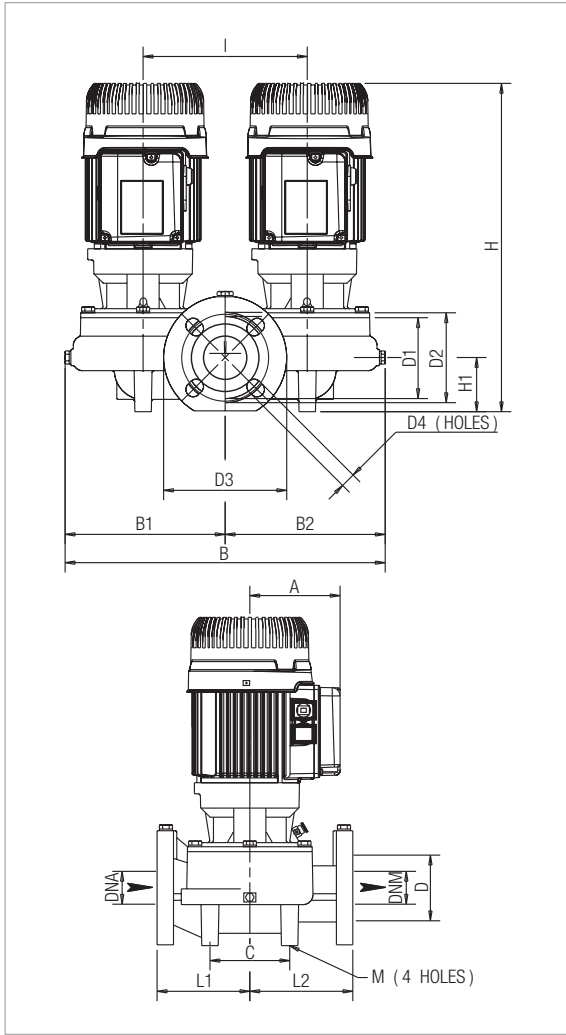



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
								kW	HP		µF	Vc
DKLP 40-900 M	250	DN 40	1 x 220 - 240V ~	2	-	2913	0,54	0,41	0,56	3,75	20	450
DKLP 40-900 T	250	DN 40	3 x 230 - 400V ~	2	-	2851	0,45	0,41	0,56	2,37-1,37	-	-
DKLP 40-1200 M	250	DN 40	1 x 220 - 240V ~	2	-	2873	0,7	0,54	0,73	4,4	20	450
DKLP 40-1200 T	250	DN 40	3 x 230 - 400V ~	2	-	2776	0,87	0,54	0,73	2,70-1,56	-	-
DKLP 40-1600 M	250	DN 40	1 x 220 - 240V ~	2	-	2812	1,18	0,75	1,01	4,71	20	450
DKLP 40-1600 T	250	DN 40	3 x 230 - 400V ~	2	IE3	2840	1,04	0,75	1,01	3,44-1,91	-	-
DKLP 40-1800 M	250	DN 40	1 x 220 - 240V ~	2	-	2812	1,15	0,85	1,16	5,44	20	450
DKLP 40-1800 T	250	DN 40	3 x 230 - 400V ~	2	IE3	2841	1,03	0,85	1,15	3,29-1,88	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m ³)	WEIGHT Kg
																				L/A	L/B	H		
																				4 HOLES 18x23				
DKLP 40-900 M-T	110	437	217	220	100	40	40	80	100	110	150	4 HOLES 18x23	396	66	200	250	125	125	4 HOLES 10	530	280	470	0,07	41,8
DKLP 40-1200 M-T	110	437	217	220	100	40	40	80	100	110	150		396	66	200	250	125	125		530	280	470	0,07	41,8
DKLP 40-1600 M-T	110	437	217	220	100	40	40	80	100	110	150		396	66	200	250	125	125		530	280	470	0,07	45,8
DKLP 40-1800 M-T	110	437	217	220	100	40	40	80	100	110	150		396	66	200	250	125	125		530	280	470	0,07	45,8

DKLM / DKLP 50 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

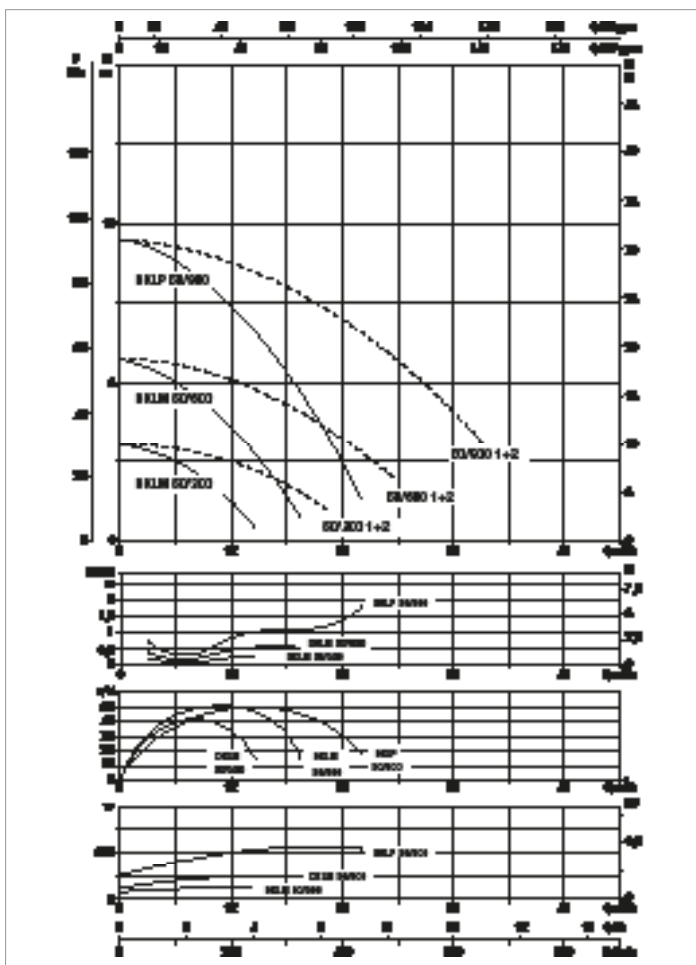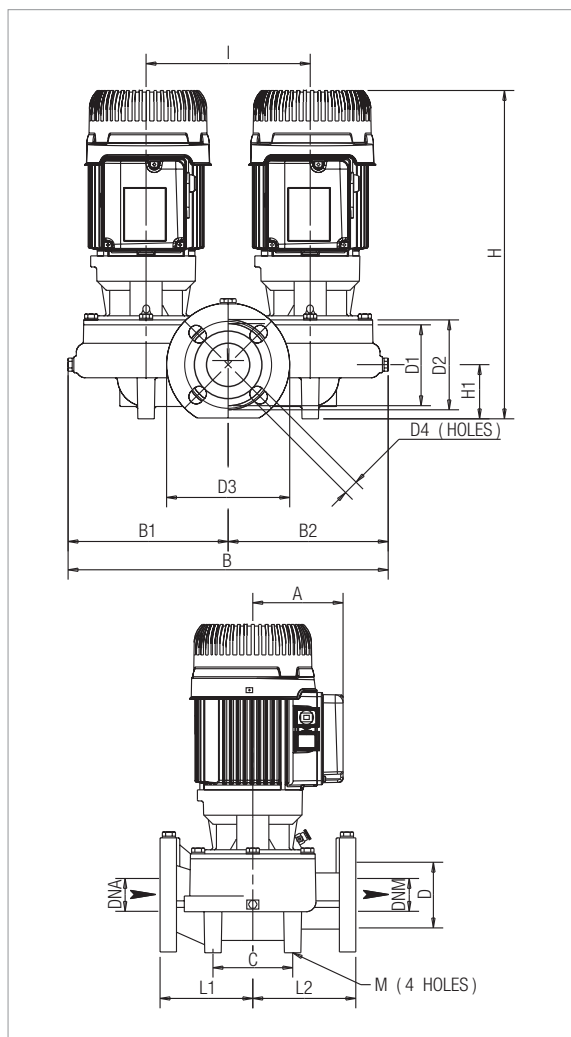



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
								kW	HP		µF	Vc
DKLM 50-300 M	280	DN 50	1 x 220 - 240 V ~	4	-	1410	0,21	0,11	0,15	1,1	8	450
DKLM 50-300 T	280	DN 50	3 x 230 - 400 V ~	4	-	1463	0,16	0,11	0,15	1,02-0,59	-	-
DKLM 50-600 T	280	DN 50	3 x 230 - 400 V ~	4	-	1399	0,32	0,22	0,3	1,28-0,74	-	-
DKLP 50-900 M	280	DN 50	1 x 220 - 240 V ~	2	-	2898	0,7	0,51	0,69	4,02	20	450
DKLP 50-900 T	280	DN 50	3 x 230 - 400 V ~	2	IE3	2897	0,63	0,51	0,69	3,39-1,96	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m³)	WEIGHT Kg
																				L/A	L/B	H		
																				4 HOLES 18x25,5				
DKLM 50-300 M-T	110	434	217	217	120	50	50	90	110	125	165	4	410	73	240	280	140	170	4	540	420	610	0,138	51
DKLM 50-600 T	110	434	217	217	120	50	50	90	110	125	165	4	414	73	240	280	140	170	4	540	420	610	0,138	52
DKLP 50-900 M-T	110	434	217	217	120	50	50	90	110	125	165	4	414	73	240	280	140	170	4	540	420	610	0,138	54

DKLM / DKLP 50 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

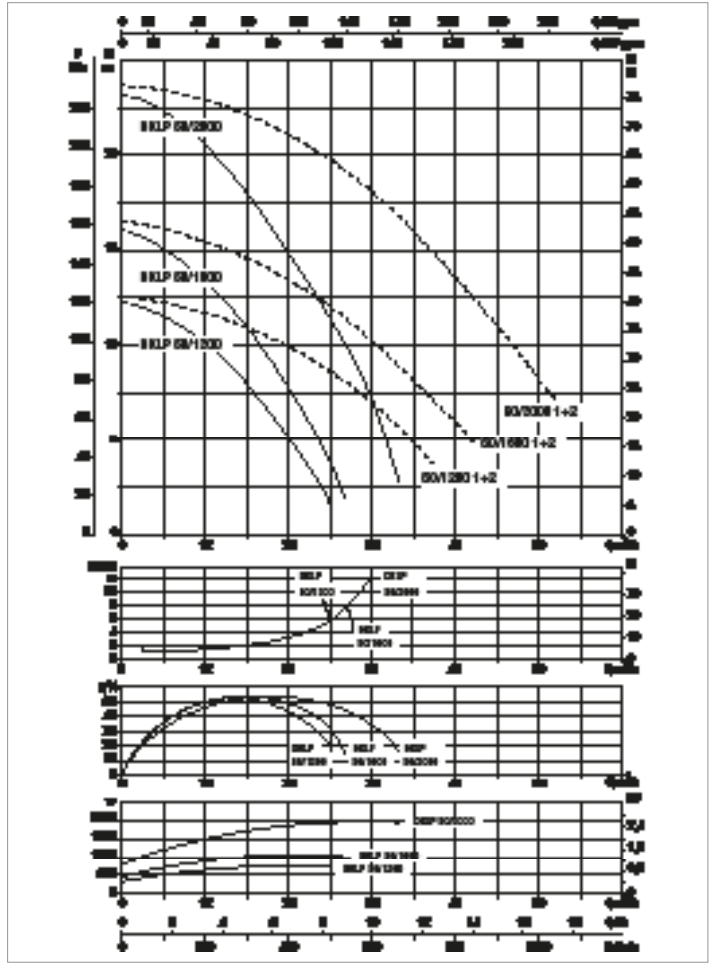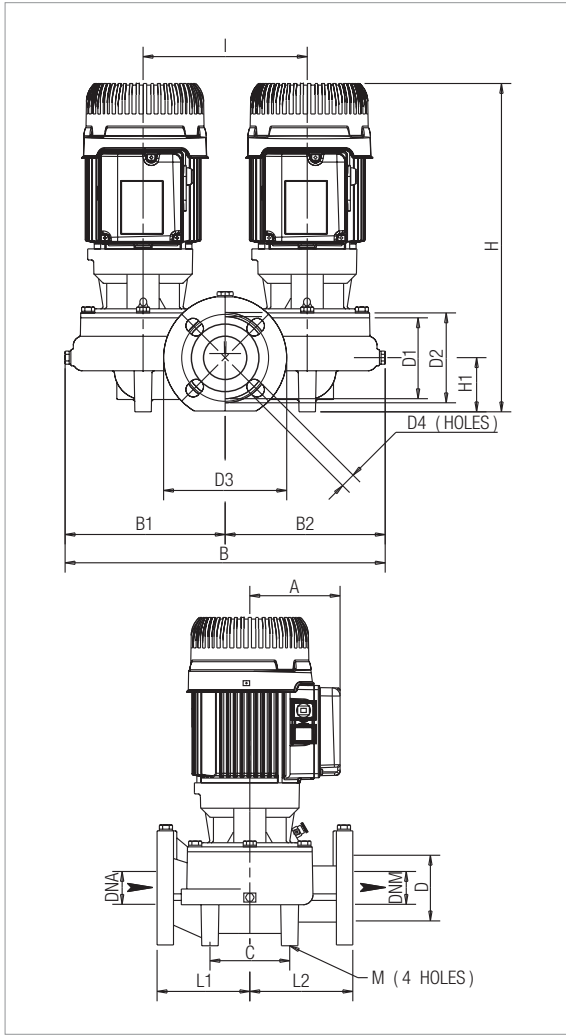



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
								kW	HP		µF	Vc
DKLP 50-1200 M	280	DN 50	1 x 220 - 240 V ~	2	-	2840	0,9	0,72	0,98	4,93	20	450
DKLP 50-1200 T	280	DN 50	3 x 230 - 400 V ~	2	IE3	2842	0,87	0,72	0,97	3,72-2,15	-	-
DKLP 50-1600 M	280	DN 50	1 x 220 - 240 V ~	2	-	2844	1,6	1,01	1,37	7,15	40	450
DKLP 50-1600 T	280	DN 50	3 x 230 - 400 V ~	2	IE3	2746	1,35	1,01	1,38	4,05-2,32	-	-
DKLP 50-2000 M	280	DN 50	1 x 220 - 240 V ~	2	-	2754	2,43	1,83	2,49	11,06	40	450
DKLP 50-2000 T	280	DN 50	3 x 230 - 400 V ~	2	IE3	2832	2,3	1,83	2,49	6,77-3,9	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m³)	WEIGHT Kg
																				L/A	L/B	H		
DKLP 50-1200 M-T	110	434	217	217	120	50	50	90	110	125	165	4 HOLES 18x25,5	414	73	240	280	140	170	4 HOLES 14	540	420	610	0,138	54,2
DKLP 50-1600 M-T	110	434	217	217	120	50	50	90	110	125	165		414	73	240	280	140	170		540	420	610	0,138	54,5
DKLP 50-2000 M-T	110	434	217	217	120	50	50	90	110	125	165		423	73	240	280	140	170		540	420	610	0,138	58,5

DKLM / DKLP 65 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

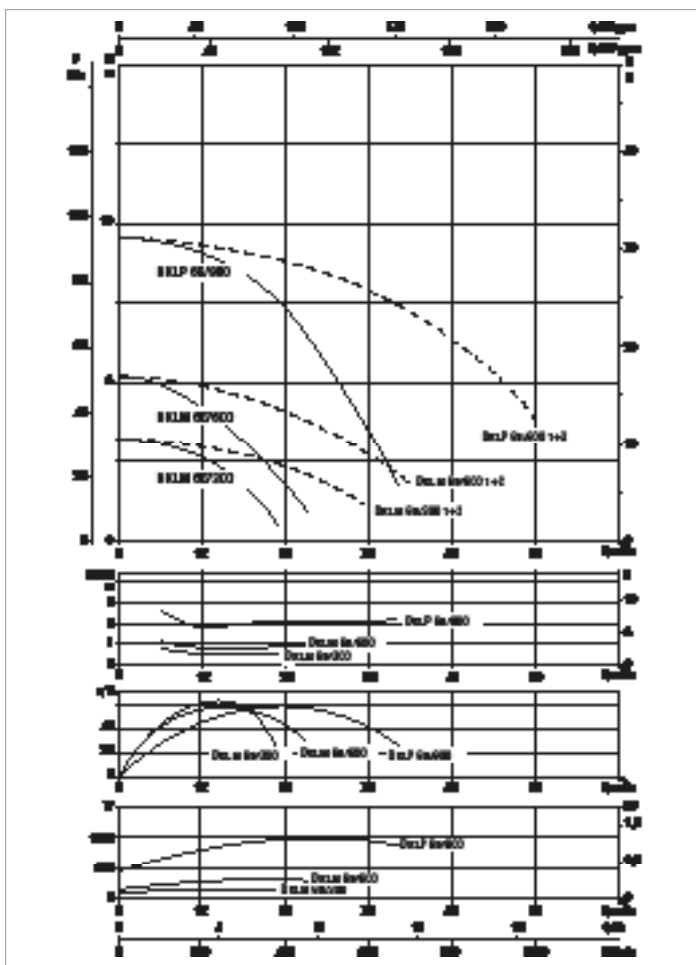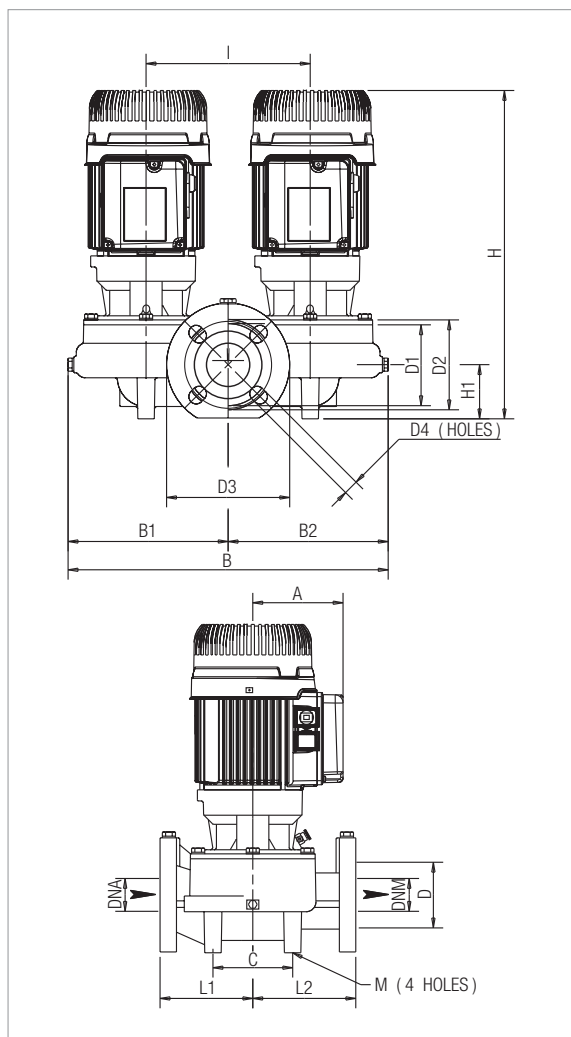



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA							
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
								kW	HP	
DKLM 65-300 T	340	DN 65	3 x 230 - 400 V ~	4	-	1445	0,2	0,15	0,2	1,07-0,62
DKLM 65-600 T	340	DN 65	3 x 230 - 400 V ~	4	-	1391	0,36	0,24	0,33	1,30-0,75
DKLP 65-900 T	340	DN 65	3 x 230 - 400 V ~	2	IE3	2937	0,9	0,8	1,09	5,05-2,92

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m ³)	WEIGHT Kg
																				L/A	L/B	H		
DKLM 65-300 T	110	455	226	229	100	65	65	110	130	145	185	4 HOLES 18x25,5	433	82	240	340	170	170	4 HOLES 14	540	520	610	0,138	55
DKLM 65-600 T	110	455	226	229	100	65	65	110	130	145	185		433	82	240	340	170	170		540	520	610	0,138	62
DKLP 65-900 T	114	455	226	229	100	65	65	110	130	145	185		443	82	240	340	170	170		540	520	610	0,138	66

DKLM / DKLP 65 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

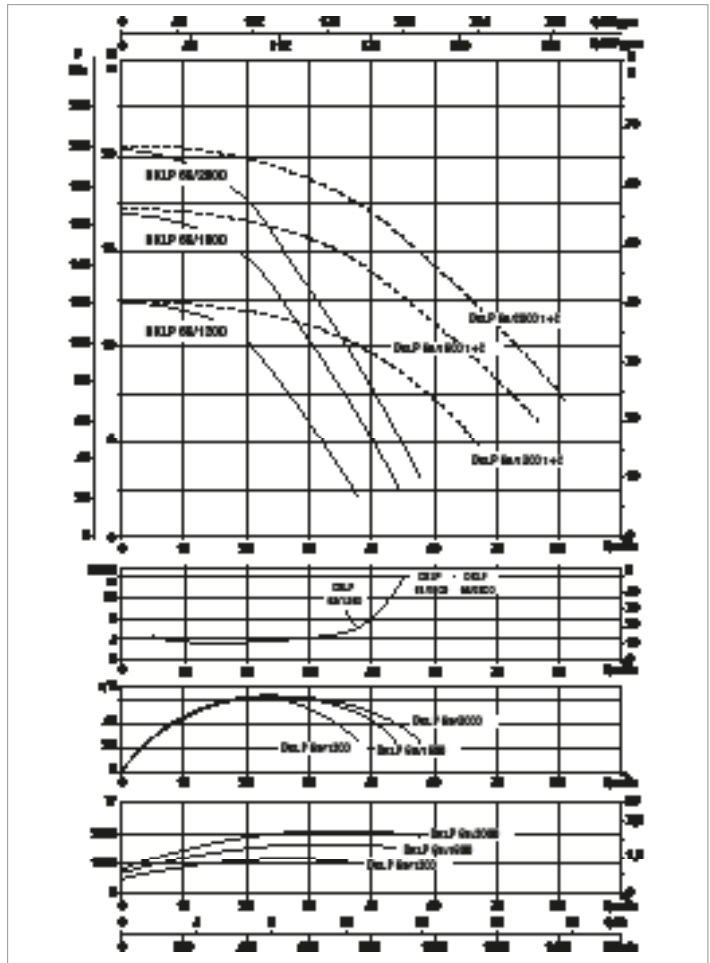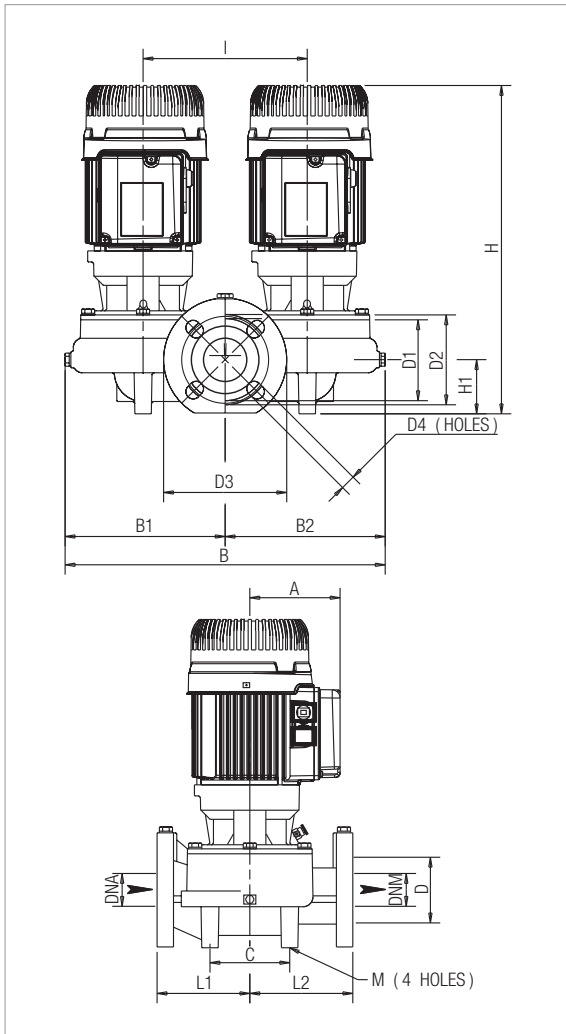



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA							
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
								kW	HP	
DKLP 65-1200 T	340	DN 65	3 x 230 - 400 V ~	2	IE3	2910	1,2	1,12	1,52	5,64-3,26
DKLP 65-1600 T	340	DN 65	3 x 230 - 400 V ~	2	IE3	2863	1,97	1,65	2,25	6,49-3,75
DKLP 65-2000 T	340	DN 65	3 x 230 - 400 V ~	2	IE3	2828	2,57	2	2,72	7,7-4,5

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m ³)	WEIGHT Kg
																				L/A	L/B	H		
DKLP 65-1200 T	114	455	226	229	100	65	65	110	130	145	185	4 HOLES 18x23	443	82	240	340	170	170	4 HOLES 14	540	520	610	0,138	66,2
DKLP 65-1600 T	114	455	226	229	100	65	65	110	130	145	185		443	82	240	340	170	170		540	520	610	0,138	66,5
DKLP 65-2000 T	118	455	226	229	100	65	65	110	130	145	185		517	82	240	340	170	170		540	420	800	0,189	72,5

DKLM / DKLP 80 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

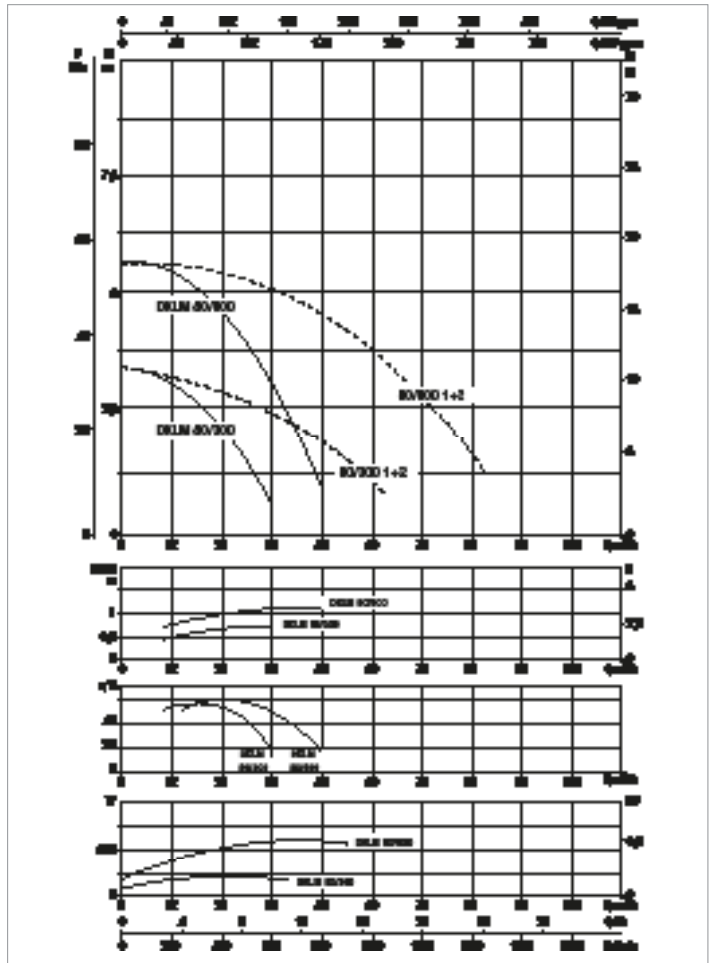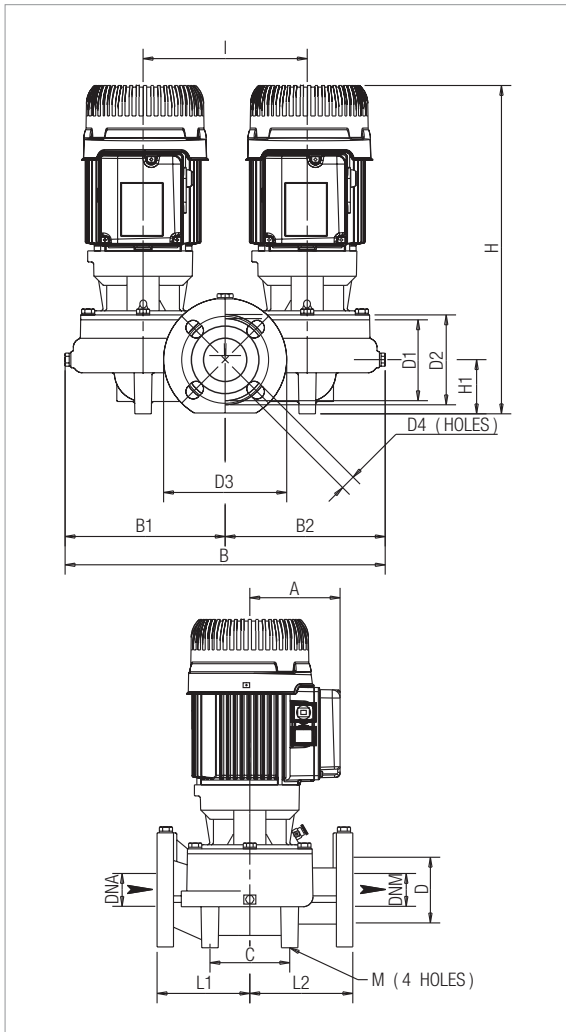



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA							
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
								kW	HP	
DKLM 80-300 T	360	DN 80	3x230 - 400V ~	4	-	1460	0,36	0,25	0,33	1,2-0,7
DKLM 80-600 T	360	DN 80	3x230 - 400V ~	4	IE3	1400	0,75	0,75	1	2,8-1,6

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m ³)	WEIGHT Kg
																				L/A	L/B	H		
DKLM 80-300 T	110	463	230	233	115	80	80	128	150	160	200	4 HOLES	453	97	240	360	190	170	4 HOLES	540	420	610	0,138	62
DKLM 80-600 T	110	463	230	233	115	80	80	128	150	160	200	18x23	453	97	240	360	190	170	14	540	420	610	0,138	70

DKLM / DKLP 80 - IN-LINE PUMPS

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

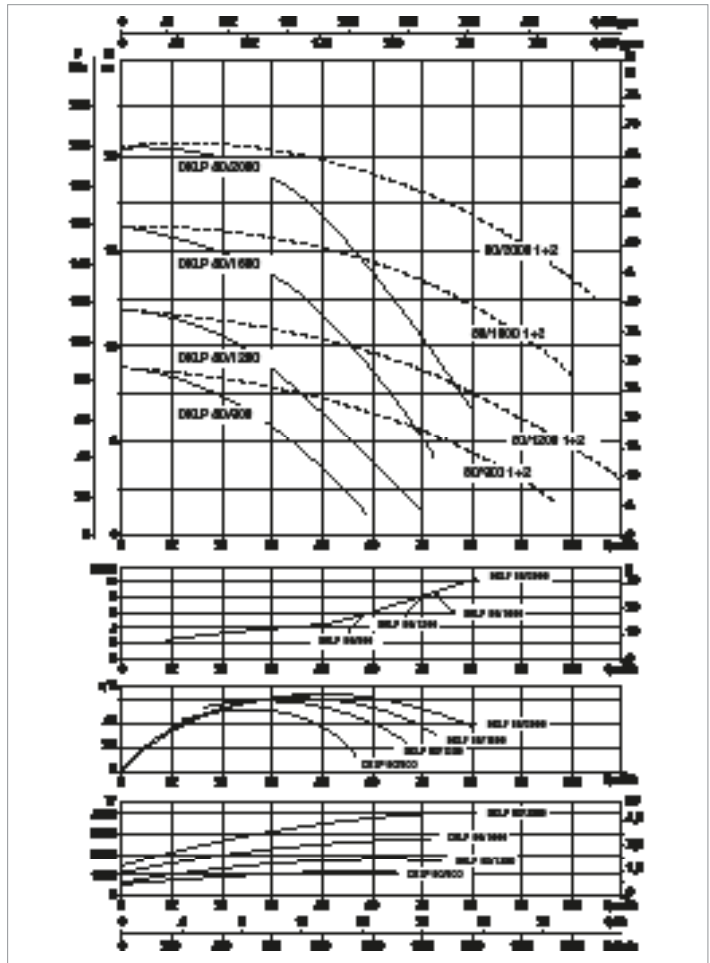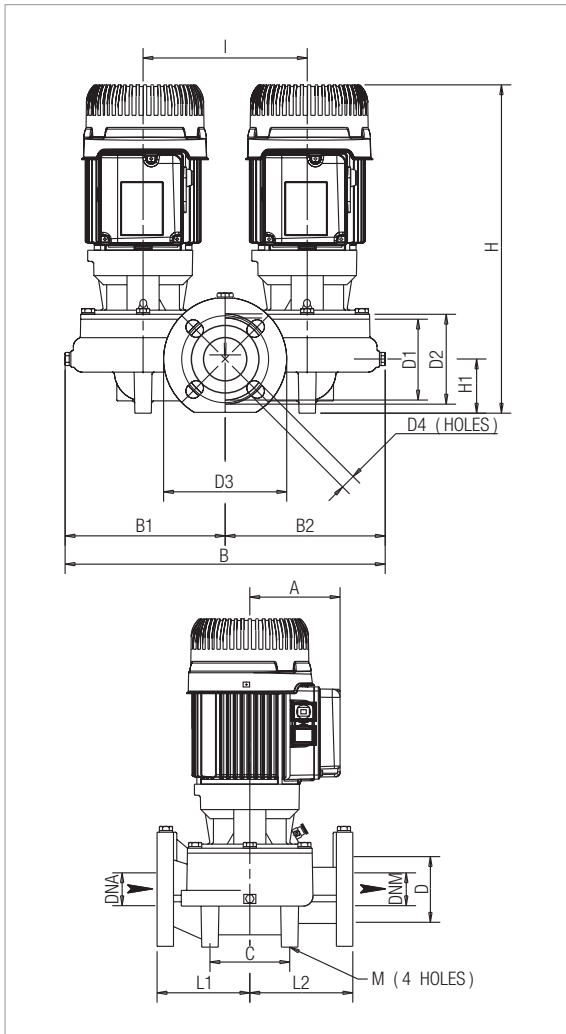


The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA							
			POWER INPUT 50 Hz	POLES	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
								kW	HP	
DKLP 80-900 T	360	DN 80	3x230 - 400V ~	2	IE3	2920	1,5	1,84	2,5	5,2-3
DKLP 80-1200 T	360	DN 80	3x230 - 400V ~	2	IE3	2840	2,1	1,84	2,5	6,6-3,8
DKLP 80-1600 T	360	DN 80	3x230 - 400V ~	2	IE3	2796	3,3	2,55	3,5	10,28-5,94
DKLP 80-2000 T	360	DN 80	3x230 - 400V ~	2	IE3	2868	4,7	3,67	5	14,9-8,42

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m ³)	WEIGHT Kg
																				L/A	L/B	H		
DKLP 80-900 T	118	463	230	233	115	80	80	128	150	160	200	4 HOLES 18x23	537	97	240	360	190	170	4 HOLES 14	540	420	800	0,189	78
DKLP 80-1200 T	118	463	230	233	115	80	80	128	150	160	200		537	97	240	360	190	170		540	420	800	0,189	78
DKLP 80-1600 T	118	463	230	233	115	80	80	128	150	160	200		537	97	240	360	190	170		540	420	800	0,189	81,2
DKLP 80-2000 T	135	463	230	233	115	80	80	128	150	160	200		526	97	240	360	190	170		540	420	800	0,189	93,2

CM2, CM2-G, CP2, CP2-G / DCM2, DCM2-G / DCP2, DCP2-G

IN-LINE PUMPS

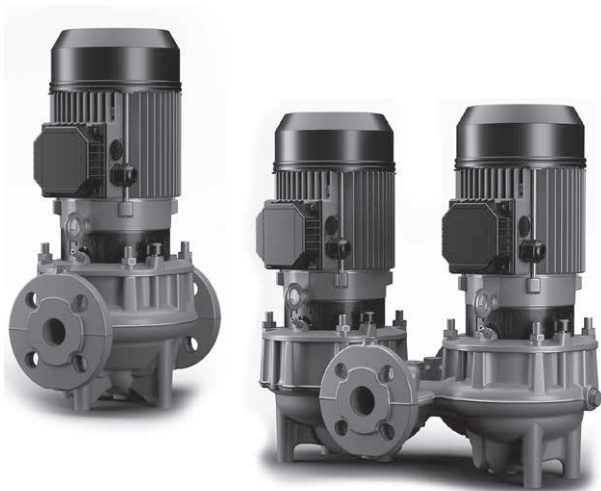

TECHNICAL DATA

- Operating range:** up to 105 m³/h
- Head:** up to 110 m
- Type of pumped liquid:** clean, free of solids and abrasives, non-viscous, non-aggressive, non-crystallised and chemically neutral, with properties similar to water
- Glycol percentage (maximum):** 50%
- Liquid temperature range:** from -15 °C to +140 °C
- Maximum ambient temperature:** +50 °C
- Maximum operating pressure:** 1600 kPa / 16 bar
- Flanging or threading:** flanging PN 10/PN16
- Motor efficiency:** IE2 up to 0,55 kW; IE3 ≥ 0,75 kW
- Motor protection class:** IP 55
- Motor insulation class:** F
- Impeller material:** cast iron or technopolymer
- Three phase power input:** 3x230 V 50 Hz / 3x400 V 50 Hz
- Max rpm:** 2910 rpm
- Type of installation:** Fixed in horizontal or vertical position with motor in up position. Only in vertical position for motor from 7,5 kW.

In-line pumps for use in commercial building service, designed for the recirculation of water in air conditioning and heating systems even in the presence of solar collectors. Available in twin version (models with letter D).

CONSTRUCTION FEATURES OF THE PUMP


Suction and delivery ports in line and flanged PN 10 or PN 16 with threaded connectors for control pressure gauges. Pump body and motor support in cast iron. Impeller in cast iron or technopolymer depending on the model. Standard mechanical seal according to DIN 24960 in silicon carbide / silicon carbide.

CONSTRUCTION FEATURES OF THE MOTOR


Air-cooled three-phase asynchronous motor with two or four poles. Motor shaft in AISI 316 stainless steel. Electrical protection by the user.

MATERIALS

N.	PARTS	MATERIALS
1	PUMP BODY	CAST IRON EN G.JL250 UNI EN 1561
2	SUPPORT	CAST IRON EN G.JL250 UNI EN 1561
3	IMPELLER	CAST IRON EN G.JL200 UNI EN 1561 AND ULTRASON E 2010
4	SHAFT WITH ROTOR	AISI 316
5	MECHANICAL SEAL	SPRING AISI 316 - SIC / SIC - EPDM
6	O-RING	EPDM

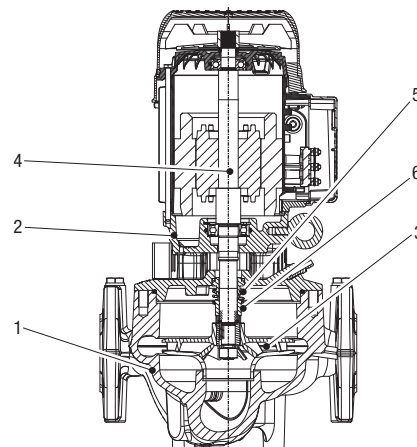

Denominations: (example)

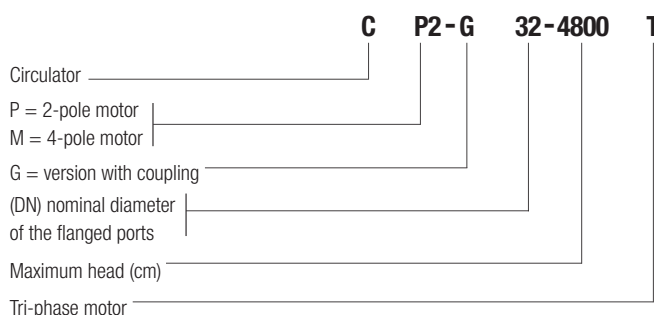


IN-LINE PUMPS

FOR CIRCULATION SYSTEMS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

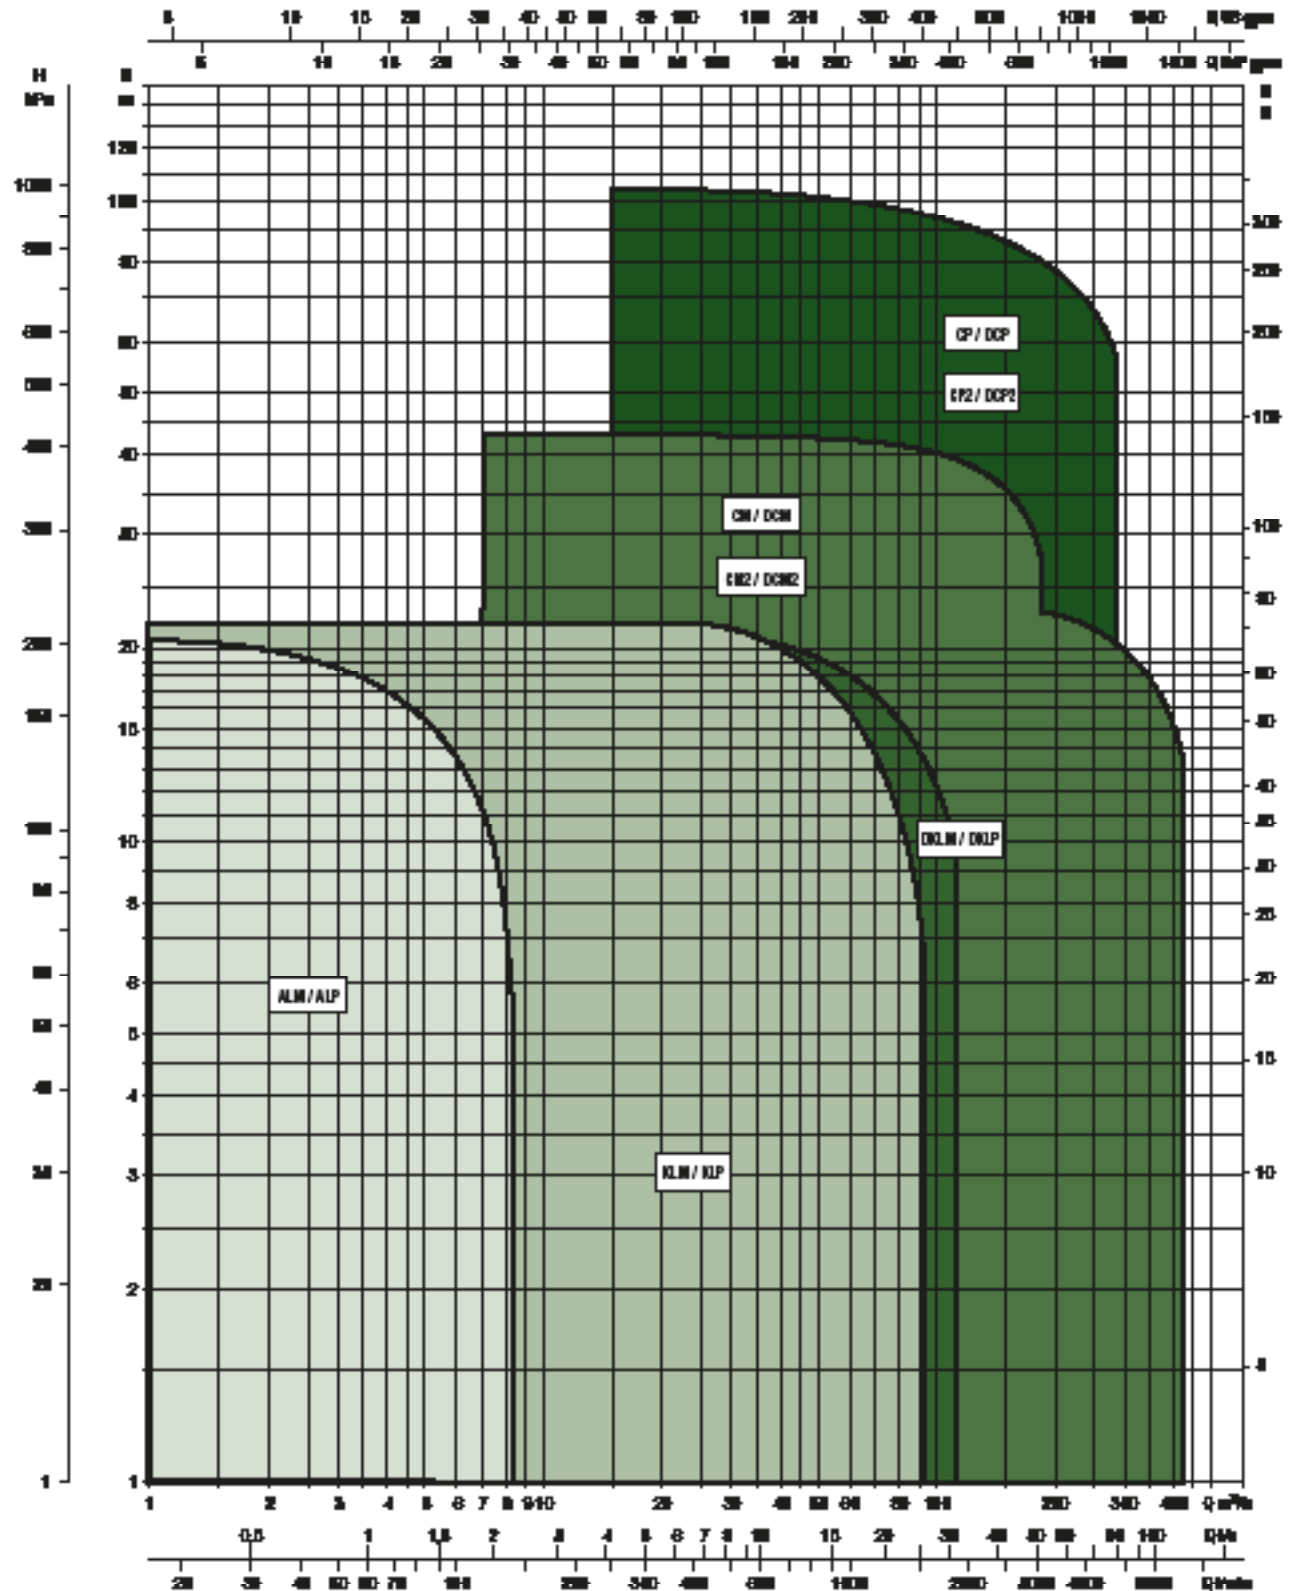

CM2, CM2-G, CP2, CP2-G / DCM2, DCM2-G / DCP2, DCP2-G

IN-LINE PUMPS

SELECTION TABLE - CM2

MODEL	HYDRAULIC DATA				
	Q=m ³ /h	0	5	10	15
	Q=l/min	0	83	167	250
CM2 32-450 T	H (mt)	4,7	4,3	3,2	1,5
CM2 32-600 T		6,0	5,6	4,4	2,4
CM2 32-800 T		7,8	7,6	6,5	4,9
CM2 32-1200 T		10,9	10,6	9,4	7,4

SELECTION TABLE - CP2

MODEL	HYDRAULIC DATA						
	Q=m ³ /h	0	10	15	20	30	35
	Q=l/min	0	167	250	333	500	583
CP2 32-550 T	H (mt)	5,5	3,9	2,2			
CP2 32-750 T		7,4	5,6	3,9			
CP2 32-1100 T		10,6	8,7	7,0	4,5		
CP2 32-1400 T		14,2	12,3	10,5	8,2		
CP2 32-1800 T		17,7	16,0	14,3	11,9	5,2	
CP2 32-2100 T		22,9	16,8	9,6			
CP2 32-2200 T		21,9	20,3	18,3	15,7	8,4	
CP2 32-2700 T		26,8	25,5	23,7	21,3	15,0	
CP2 32-3600 T		36,4	35,5	33,5	31,0	24,8	
CP2 32-4000 T		40,3	39,4	37,4	34,9	28,4	24,5
CP2-G 32-4800 T		48,7	48,1	46,5	44,2	37,9	33,8

SELECTION TABLE - DCM2

MODEL	HYDRAULIC DATA				
	Q=m ³ /h	0	5	10	15
	Q=l/min	0	83	167	250
DCM2 32-450 T	H (mt)	4,7	4,2	2,7	
DCM2 32-600 T		6,0	5,6	4,3	1,9
DCM2 32-800 T		8,0	7,6	6,5	4,6
DCM2 32-1200 T		11,1	10,5	9,4	7,2

SELECTION TABLE - DCP2

MODEL	HYDRAULIC DATA						
	Q=m ³ /h	0	10	15	20	30	35
	Q=l/min	0	167	250	333	500	583
DCP2 32-550 T	H (mt)	5,5	3,4	0,8			
DCP2 32-750 T		7,4	5,2	2,8			
DCP2 32-1100 T		10,9	8,4	6,1	2,6		
DCP2 32-1400 T		14,4	12,1	9,8	6,5		
DCP2 32-1800 T		17,7	15,6	13,2			
DCP2 32-2100 T		23,0	16,6	8,9			
DCP2 32-2200 T		22,1	20,1	17,4	13,7	6,3	
DCP2 32-2700 T		27,2	25,3	23,3	20,5	12,2	
DCP2 32-3600 T		36,9	35,0	33,1	30,4	22,6	
DCP2 32-4000 T		40,9	39,1	37,0	34,1	25,9	21,0
DCP2-G 32-4800 T		49,4	47,8	46,2	43,7	34,9	28,9

CM2, CM2-G, CP2, CP2-G / DCM2, DCM2-G / DCP2, DCP2-G

IN-LINE PUMPS

SELECTION TABLE - CM2

MODEL	HYDRAULIC DATA					
	Q=m³/h	0	10	20	25	30
	Q=l/min	0	167	333	417	500
CM2 40-450 T	H (m)	4,6	4,1	2,0		
CM2 40-650 T		6,4	6,0	4,1	2,5	
CM2 40-850 T		8,5	7,9	5,9	4,3	
CM2 40-1000 T		9,7	9,7	7,9	6,2	4,1
CM2 40-1200 T		11,9	12,0	11,0	10,2	9,1
CM2 40-1450 T		14,5	14,4	13,2	12,3	11,0
CM2 40-1650 T		16,7	16,4	15,1	14,0	12,7
CM2 40-2050 T		20,5	20,2	18,4	16,9	15,0

SELECTION TABLE - CP2

MODEL	HYDRAULIC DATA								
	Q=m³/h	0	10	15	20	30	40	50	70
	Q=l/min	0	167	250	333	500	667	833	1167
CP2 40-600 T	H (m)	6,1	4,4	2,5					
CP2 40-1000 T		10,2	8,7	6,7	3,7				
CP2 40-1300 T		13,2	11,6	9,7	7,1				
CP2 40-1900 T		19,0	19,0	18,4	17,5	14,7	10,5		
CP2 40-2200 T		22,5	22,5	21,9	20,9	18,0	14,0		
CP2 40-2800 T		27,6	27,8	27,2	26,3	23,5	19,8		
CP2 40-3300 T		33,1	33,5	32,9	32,0	29,2	25,3		
CP2-G 40-4000 T		38,5	39,0	38,9	38,3	35,7	30,9		
CP2-G 40-5000 T		48,8	49,2	49,0	48,6	46,9	44,3		
CP2-G 40-6600 T		66,2	66,4	66,1	65,6	63,6	60,5		
CP2-G 40-8200 T		82,0	82,1	81,8	81,2	78,9	74,9	69,1	52,9

SELECTION TABLE - DCM2

MODEL	HYDRAULIC DATA					
	Q=m³/h	0	10	20	25	30
	Q=l/min	0	167	333	417	500
DCM2 40-450 T	H (m)	4,6	3,9	1,1		
DCM2 40-650 T		6,4	5,8	3,2	0,8	
DCM2 40-850 T		8,3	7,7	5,0	2,9	
DCM2 40-1000 T		9,6	9,4	7,2	5,2	2,8
DCM2 40-1200 T		12,5	12,1	10,6	9,2	7,3
DCM2 40-1450 T		14,9	14,5	12,9	11,5	9,5
DCM2 40-1650 T		16,9	16,6	14,8	13,2	11,1
DCM2 40-2050 T		20,7	20,2	18,1	16,2	13,6

SELECTION TABLE - DCP2

MODEL	HYDRAULIC DATA								
	Q=m³/h	0	10	15	20	30	40	50	70
	Q=l/min	0	167	250	333	500	667	833	1167
DCP2 40-600 T	H (m)	6,0	3,9	1,4					
DCP2 40-1000 T		10,3	8,5	5,6	1,8				
DCP2 40-1300 T		13,1	11,3	8,8	5,0				
DCP2 40-1900 T		19,1	19,2	18,7	17,7	14,4	9,3		
DCP2 40-2200 T		22,4	22,6	22,1	21,2	17,8	12,5		
DCP2 40-2800 T		27,7	28,2	27,9	27,1	24,1	19,2		
DCP2 40-3300 T		33,4	33,9	33,5	32,8	29,9	25,2		
DCP2-G 40-4000 T		39,2	39,5	39,4	38,9	36,3	31,1		
DCP2-G 40-5000 T		49,3	49,4	49,0	48,4	45,9	41,7		
DCP2-G 40-6600 T		67,9	67,6	67,0	66,2	63,3	58,7		
DCP2-G 40-8200 T		83,4	84,3	83,8	82,7	79,2	74,1	67,4	46,1

CM2, CM2-G, CP2, CP2-G / DCM2, DCM2-G / DCP2, DCP2-G

IN-LINE PUMPS

SELECTION TABLE - CM2

MODEL	HYDRAULIC DATA							
	Q=m ³ /h	0	10	20	30	35	40	50
	Q=l/min	0	167	333	417	500	667	833
CM2 50-400 T	H (m)	3,9	3,7	2,7	1,0			
CM2 50-530 T		5,3	5,2	4,3	2,6	1,4		
CM2 50-670 T		6,7	6,3	5,2	3,4	2,1		
CM2 50-850 T		8,5	8,3	7,1	5,2	3,9		
CM2 50-1000 T		10,5	10,4	9,5	7,4	6,0	4,4	
CM2 50-1300 T		13,1	13,1	12,5	11,1	10,2	9,1	
CM2 50-1700 T		16,8	16,8	16,1	14,7	13,7	12,6	9,8
CM2-G 50-2200 T		22,1	22,0	21,4	20,1	19,2	18,0	15,2
CM2-G 50-2700 T		27,2	26,8	25,7	23,8	22,5	20,9	17,0

SELECTION TABLE - CP2

MODEL	HYDRAULIC DATA									
	Q=m ³ /h	0	10	20	30	40	50	60	70	105
	Q=l/min	0	167	250	333	500	667	833	1167	1750
CP2 50-600 T	H (m)	6,1	5,2	3,7	1,8					
CP2 50-800 T		8,0	7,5	5,9	3,9					
CP2 50-1100 T		11,4	11,0	9,9	8,0	5,6				
CP2 50-1400 T		14,4	14,3	13,5	12,0	9,8	6,7	2,7		
CP2 50-1800 T		17,7	18,0	17,2	15,8	13,7	10,8	6,8		
CP2 50-2100 T		21,4	21,8	21,4	20,1	18,1	15,3	11,6	6,8	
CP2 50-2800 T		27,9	27,6	26,6	24,9	22,4	19,1	15,2	10,5	
CP2-G 50-3300 T		33,8	33,9	33,0	31,2	28,6	25,2	21,1	16,1	
CP2-G 50-4400 T		43,7	44,0	43,2	41,5	38,8	35,1	30,5	25,0	
CP2-G 50-5200 T		52,0	53,2	52,9	51,7	49,8	47,3	44,2	40,6	
CP2-G 50-6600 T		65,5	67,2	66,8	65,2	62,9	60,3	57,6	54,5	
CP2-G 50-9000 T		88,8	90,9	90,6	89,0	86,8	84,4	81,9	79,1	
CP2-G 50-11100 T		110,8	112,2	111,5	109,5	106,9	104,1	101,1	97,6	71,1

CM2, CM2-G, CP2, CP2-G / DCM2, DCM2-G / DCP2, DCP2-G

IN-LINE PUMPS

SELECTION TABLE - DCM2



MODEL	HYDRAULIC DATA							
	Q=m³/h	0	10	20	30	35	40	50
	Q=l/min	0	167	333	417	500	667	833
DCM2 50-400 T	H (m)	4,1	3,7	2,6	0,4			
DCM2 50-530 T		5,5	5,3	4,3	2,4	1,0		
DCM2 50-670 T		6,8	6,3	5,0	2,7	0,9		
DCM2 50-850 T		8,6	8,3	7,0	4,6	2,9		
DCM2 50-1000 T		10,7	10,5	9,3	6,9	5,2	3,3	
DCM2 50-1300 T		13,2	13,2	12,4	10,7	9,5	8,2	4,7
DCM2 50-1700 T		17,0	16,9	16,0	14,3	13,1	11,7	8,1
DCM2-G 50-2200 T		22,5	22,5	21,7	20,1	19,0	17,6	14,3
DCM2-G 50-2700 T		27,7	27,3	26,3	24,4	23,0	21,3	17,1

SELECTION TABLE - DCP2

MODEL	HYDRAULIC DATA									
	Q=m³/h	0	10	20	30	40	50	60	70	105
	Q=l/min	0	167	250	333	500	667	833	1167	1750
DCP2 50-600 T	H (m)	6,3	5,3	3,5	1,4					
DCP2 50-800 T		8,4	7,6	5,8	3,5					
DCP2 50-1100 T		12,1	11,4	10,1	7,9	4,9				
DCP2 50-1400 T		15,0	14,8	13,7	11,7	9,0	5,3	0,7		
DCP2 50-1800 T		18,5	18,6	17,5	15,6	13,0	9,5	4,8		
DCP2 50-2100 T		22,1	22,4	21,7	20,1	17,8	14,6	10,5	5,2	
DCP2 50-2800 T		28,6	28,1	26,9	24,8	21,7	17,6	12,5	6,7	
DCP2-G 50-3300 T		34,6	34,5	33,5	31,5	28,4	24,3	19,2	12,9	
DCP2-G 50-4400 T		44,3	44,5	43,7	41,9	38,8	34,5	29,0	22,5	
DCP2-G 50-5200 T		53,3	54,1	53,7	52,4	50,1	47,1	43,3	38,8	
DCP2-G 50-6600 T		67,2	68,8	68,4	66,8	64,4	61,5	58,2	54,4	
DCP2-G 50-9000 T		89,1	92,2	91,9	89,7	86,8	83,7	80,8	77,8	
DCP2-G 50-11100 T		109,5	112,6	111,6	108,6	104,9	101,2	97,8	94,2	62,4

CM2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

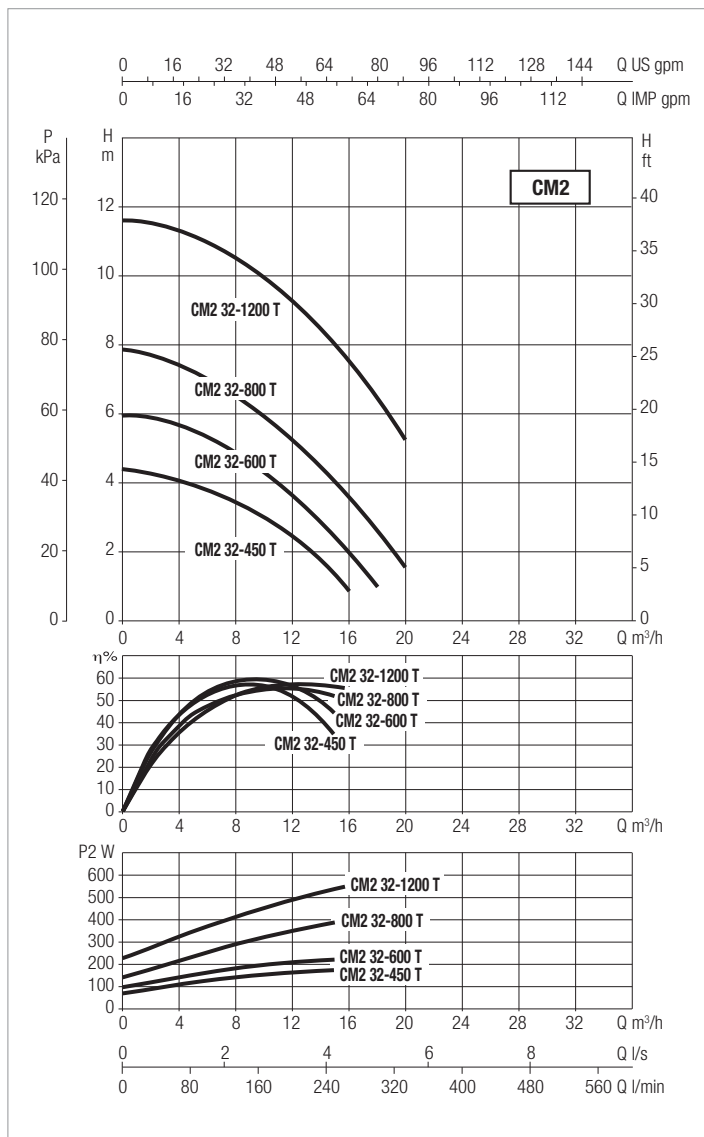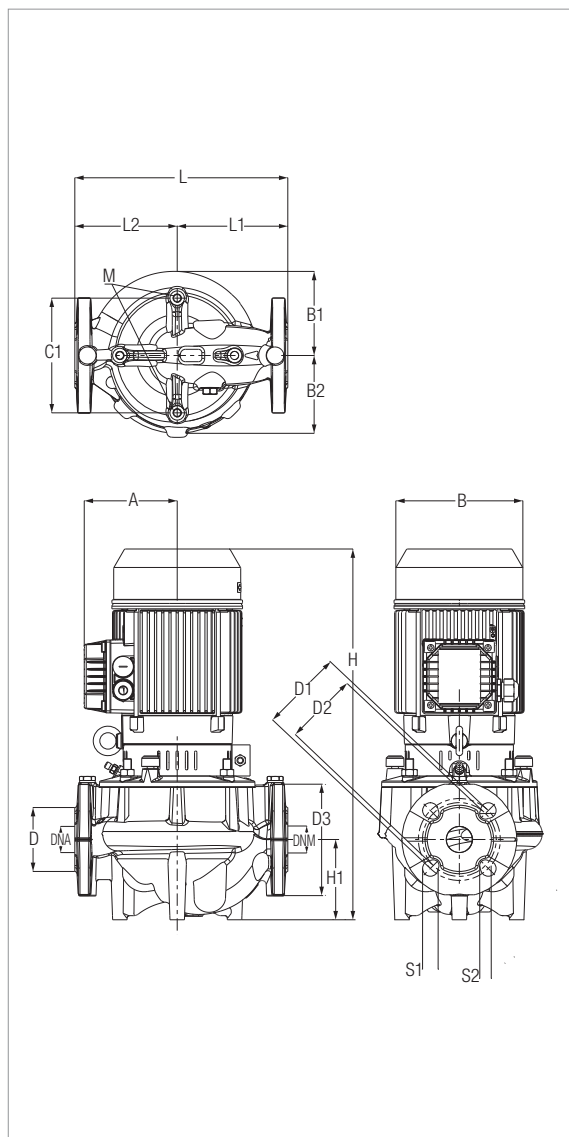



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [KW]	P2 NOMINAL		In [A]	
					KW	HP	230	400
CM2 32-450 T	260	DN 32 PN 16 DN 32 PN 10	230-400V	0,26	0,25	0,34	1,2A	0,7A
CM2 32-600 T				0,33	0,25	0,34	1,3A	0,8A
CM2 32-800 T	320			0,51	0,37	0,50	2,0A	1,2A
CM2 32-1200 T				0,73	0,55	0,75	2,4A	1,4A

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CM2 32-450 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	21,9
CM2 32-600 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	21,6
CM2 32-800 T	110	150	129	120	180	80	100	14	90	19	140	32	33	459	90	320	165	155	10	0,52	0,29	0,7	0,11	27
CM2 32-1200 T	110	150	129	120	180	80	100	14	90	19	140	32	33	459	90	320	165	155	10	0,52	0,29	0,7	0,11	27

CM2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

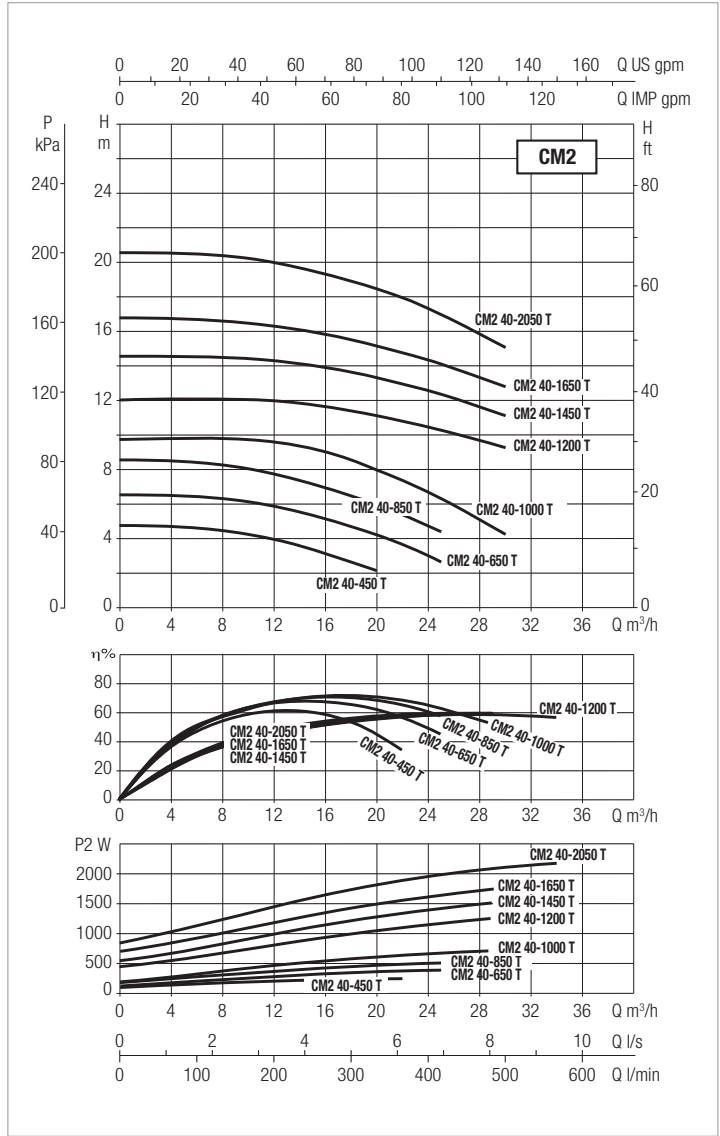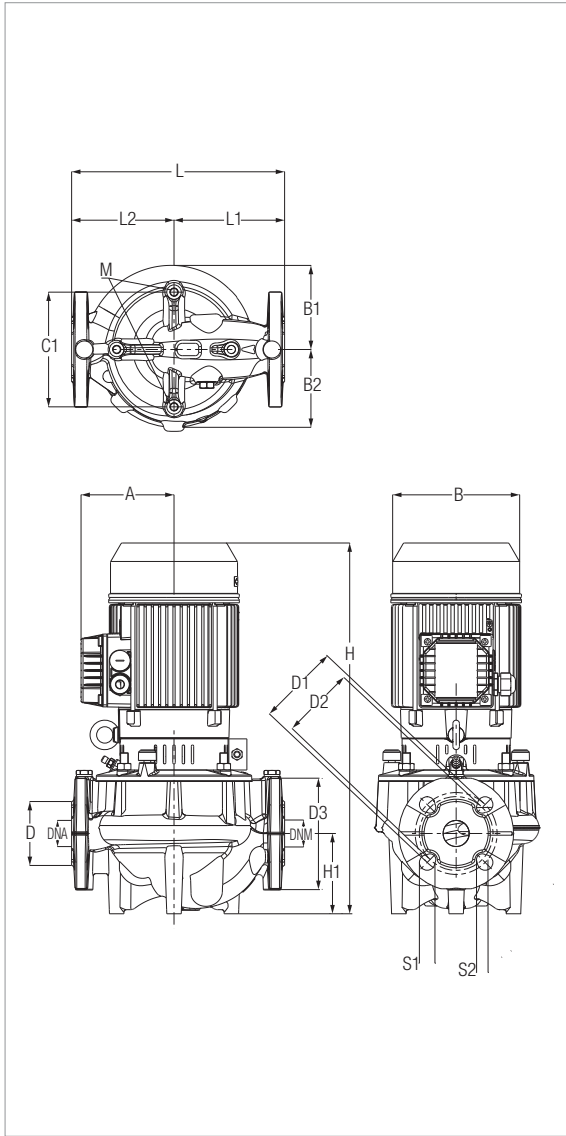



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
CM2 40-450 T	320	DN 40 PN 16 DN 40 PN 10	230-400V	0.26	0.25	0.33	1.3	0.77
CM2 40-650 T				0.51	0.37	0.55	2	1.13
CM2 40-850 T				0.73	0.55	0.75	2.3	1.34
CM2 40-1000 T				0.73	0.55	0.75	3.1	1.79
CM2 40-1200 T	440			1.68	2.2	3	7.6	4.4
CM2 40-1450 T				1.9	2.2	3	8.1	4.7
CM2 40-1650 T				2.23	2.2	3	8.5	4.9
CM2 40-2050 T				2.5	2.2	3	9.2	5.3

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CM2 40-450 T	110	143	130,6	130,6	180	88	110	20	100	20	150	40	40	440	95	320	168	152	10	0,60	0,30	0,50	0,09	31,70
CM2 40-650 T	110	143	130,6	130,6	180	88	110	20	100	20	150	40	40	455	95	320	168	152	10	0,60	0,30	0,50	0,09	31,70
CM2 40-850 T	110	143	130,6	130,6	180	88	110	20	100	20	150	40	40	455	95	320	168	152	10	0,60	0,30	0,50	0,09	31,70
CM2 40-1000 T	113,5	155	130,6	130,6	180	88	110	20	100	20	150	40	40	448	95	320	168	152	10	0,60	0,30	0,50	0,09	33,20
CM2 40-1200 T	134,5	187	180	180	250	88	110	20	100	20	150	40	40	560,5	99,5	440	220	220	10	0,72	0,60	0,58	0,25	66,00
CM2 40-1450 T	134,5	187	180	180	250	88	110	20	100	20	150	40	40	560,5	99,5	440	220	220	10	0,72	0,60	0,58	0,25	66,00
CM2 40-1650 T	134,5	187	180	180	250	88	110	20	100	20	150	40	40	560,5	99,5	440	220	220	10	0,72	0,60	0,58	0,25	66,00
CM2 40-2050 T	134,5	187	180	180	250	88	110	20	100	20	150	40	40	560,5	99,5	440	220	220	10	0,72	0,60	0,58	0,25	66,00

CM2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

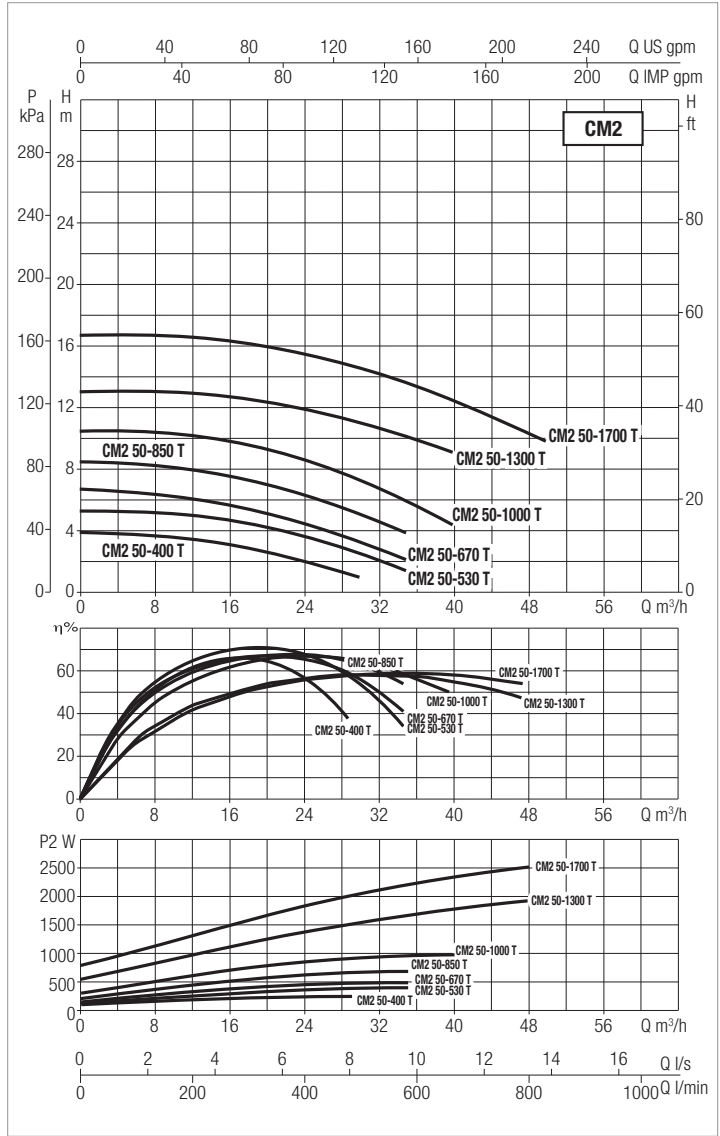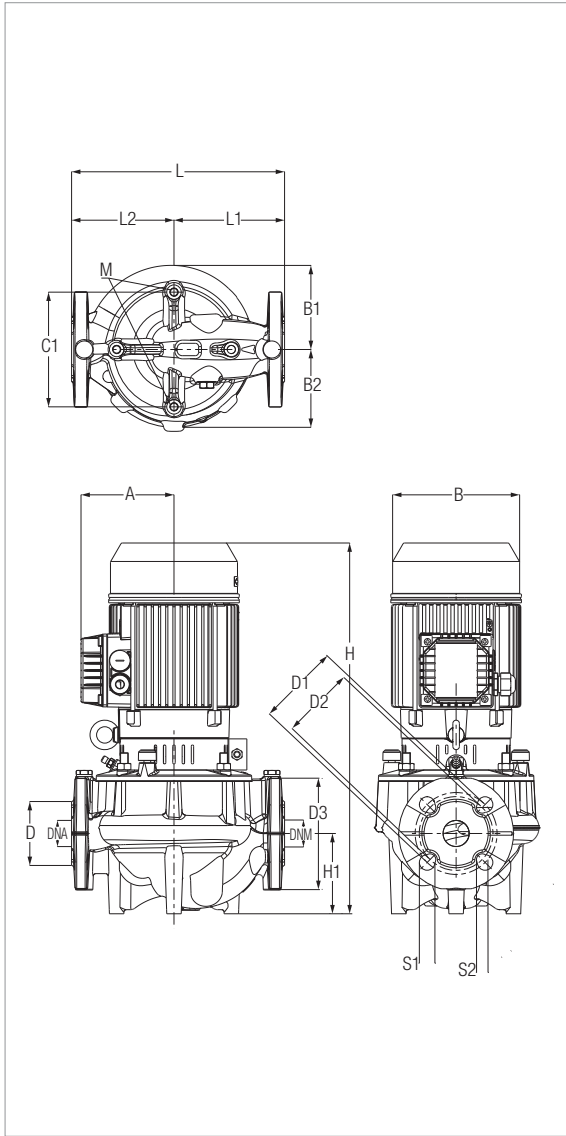



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA					
			POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
CM2 50-400 T	280	DN 50 PN 16 DN 50 PN 10	230-400V	0.36	0.25	0.33	1.4	0.8
CM2 50-530 T				0.52	0.55	0.75	2.1	1.2
CM2 50-670 T				0.64	0.55	0.75	2.3	1.3
CM2 50-850 T	340			0.87	0.75	1	2.9	1.7
CM2 50-1000 T				1.18	1.1	1.5	6.9	4
CM2 50-1300 T				2.3	2.2	3	8.7	5
CM2 50-1700 T	440			3.18	2.2	3	10.6	6.1

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CM2 50-400 T	110	143	112,3	96	100	90	125	23,3	110	18	165	50	50	415	73	280	140	140	10	0,60	0,30	0,50	0,09	28,2
CM2 50-530 T	110	143	112,3	96	100	90	125	23,3	110	18	165	50	50	430,5	73	280	140	140	10	0,60	0,30	0,50	0,09	28,2
CM2 50-670 T	110	143	136,4	131,2	180	100	125	21,8	110	14	165	50	50	483,5	105	340	172,5	167,5	10	0,60	0,30	0,50	0,09	34,5
CM2 50-850 T	118	155	136,4	131,2	180	100	125	21,8	110	14	165	50	50	483,5	105	340	172,5	167,5	10	0,60	0,30	0,50	0,09	36
CM2 50-1000 T	134,5	187	136,4	131,2	180	100	125	21,8	110	14	165	50	50	560	105	340	172,5	167,5	10	0,60	0,30	0,50	0,09	52,6
CM2 50-1300 T	134,5	187	189	180	180	100	125	21,8	110	14	165	50	50	589	128,4	440	220	220	10	0,72	0,60	0,58	0,25	68,9
CM2 50-1700 T	134,5	187	189	180	180	100	125	21,8	110	14	165	50	50	589	128,4	440	220	220	10	0,72	0,60	0,58	0,25	68,9

CM2-G - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

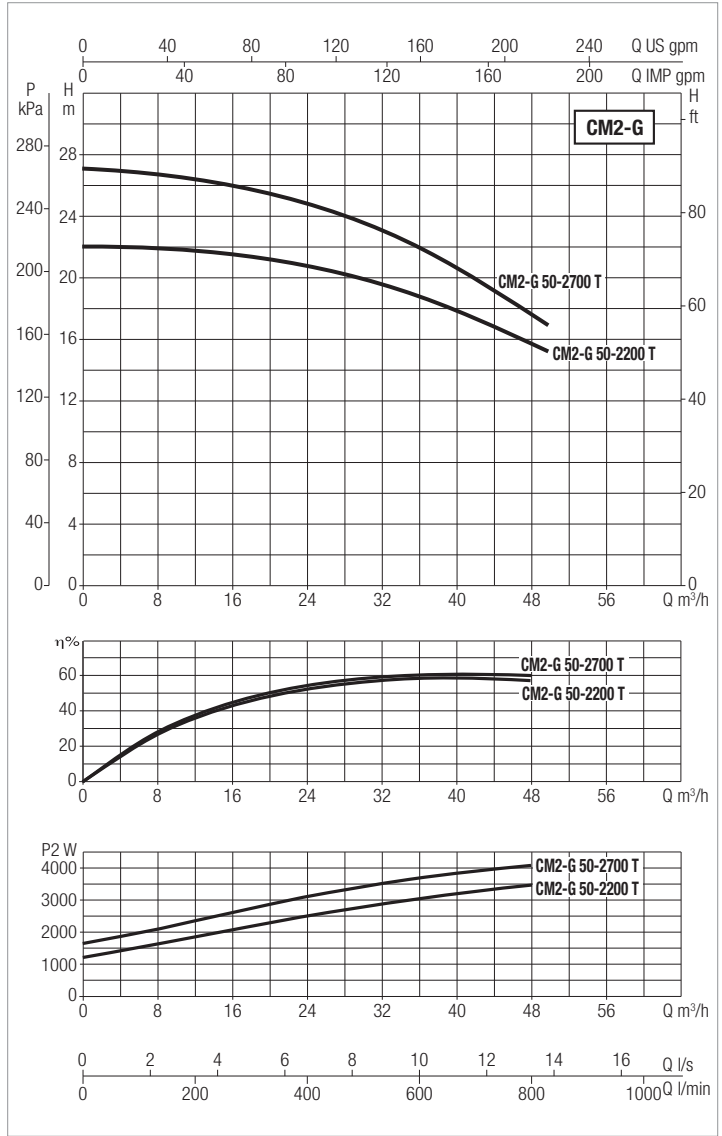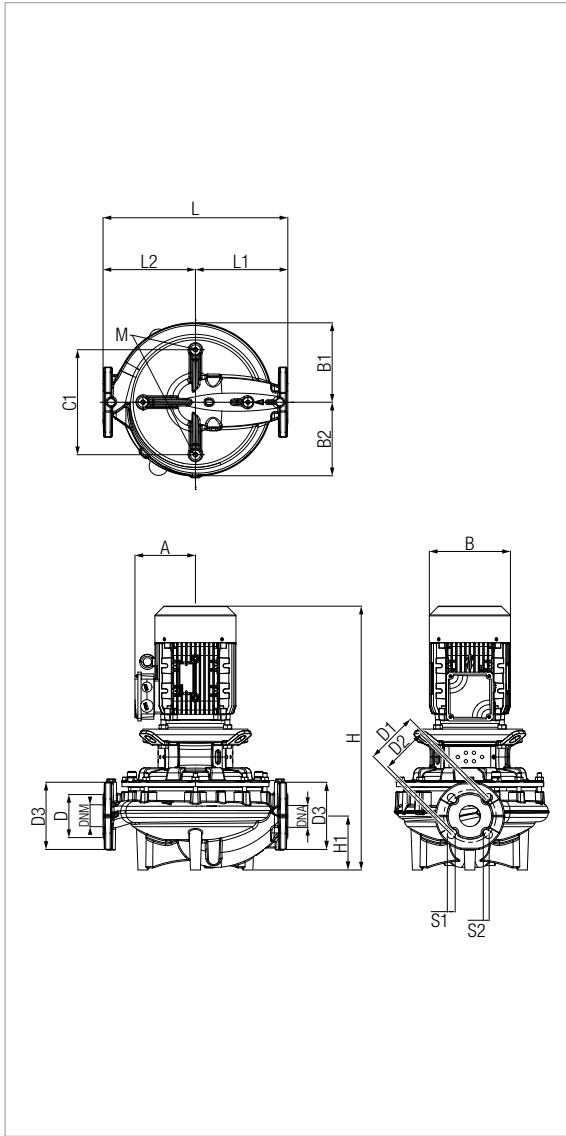



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
CM2-G 50-2200 T	440	DN 50 PN 16 DN 50 PN 10	400-690V	4.4	3	4	7.2	4.2
CM2-G 50-2700 T				4.7	4	5.5	8.3	4.8

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CM2-G 50-2200 T	144	193	189	180	180	100	125	21,8	110	14	165	50	50	628	128,4	440	220	220	10	0,44	0,37	0,63	0,10	98
CM2-G 50-2700 T	144	193	189	180	180	100	125	21,8	110	14	165	50	50	643	128,4	440	220	220	10	0,44	0,37	0,64	0,10	99,5

CP2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

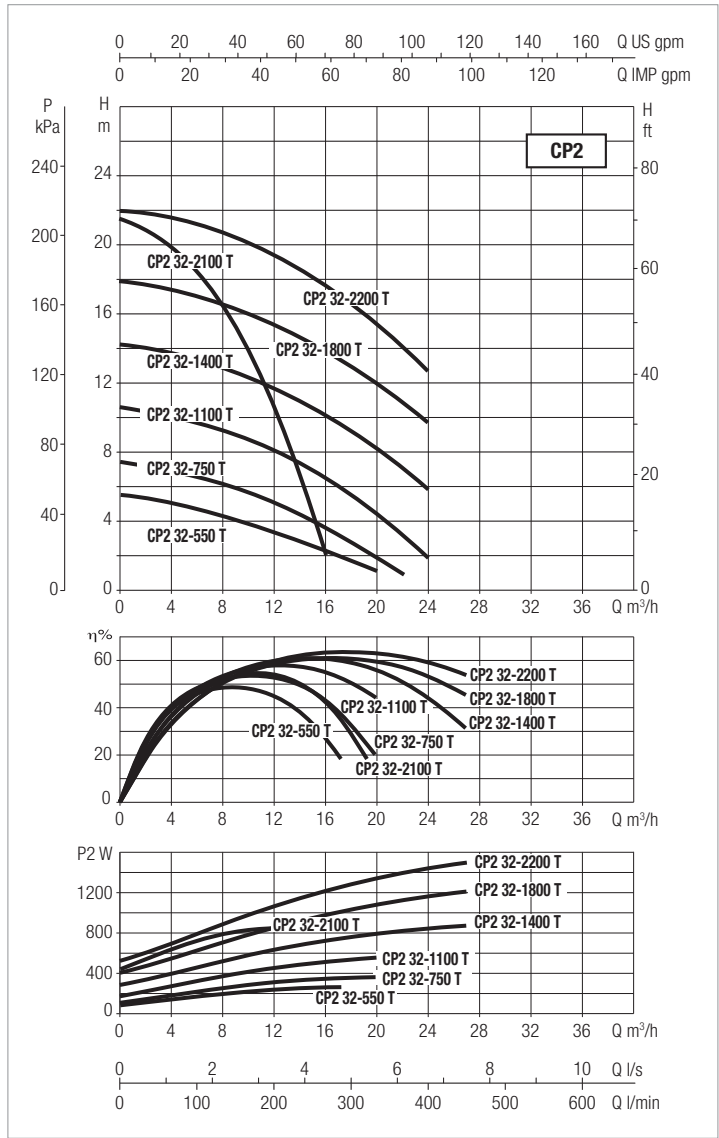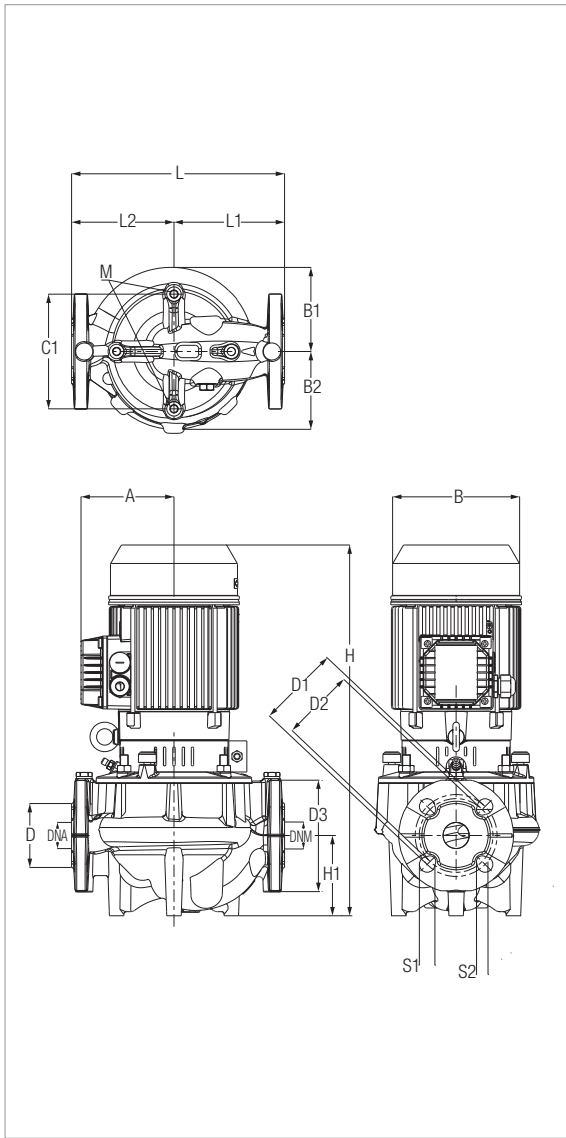



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
CP2 32-550 T	260	DN 32 PN 16 DN 32 PN 10	230-400V	0,37	0,25	0,34	1,7 A	1 A
CP2 32-750 T				0,48	0,37	0,50	1,9 A	1,1 A
CP2 32-1100 T				0,73	0,55	0,75	2,4 A	1,4 A
CP2 32-1400 T				1,07	0,75	1,02	3,5 A	2 A
CP2 32-1800 T				1,48	1,1	1,50	5,6 A	3,2 A
CP2 32-2100 T				0,85	0,75	1,02	3 A	1,7 A
CP2 32-2200 T				1,83	1,5	2,04	6,3 A	3,6 A

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CP2 32-550 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	22,6
CP2 32-750 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	22,6
CP2 32-1100 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	22,6
CP2 32-1400 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	24,7
CP2 32-1800 T	110	150	102	95	140	78	100	14	90	19	140	32	33	445	98	260	135	125	10	0,53	0,3	0,46	0,07	25,5
CP2 32-2100 T	113	160	102	95	140	78	100	14	90	19	140	32	33	453	98	260	135	125	10	0,53	0,3	0,46	0,07	25
CP2 32-2200 T	113	160	102	95	140	78	100	14	90	19	140	32	33	453	98	260	135	125	10	0,53	0,3	0,46	0,07	25

CP2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

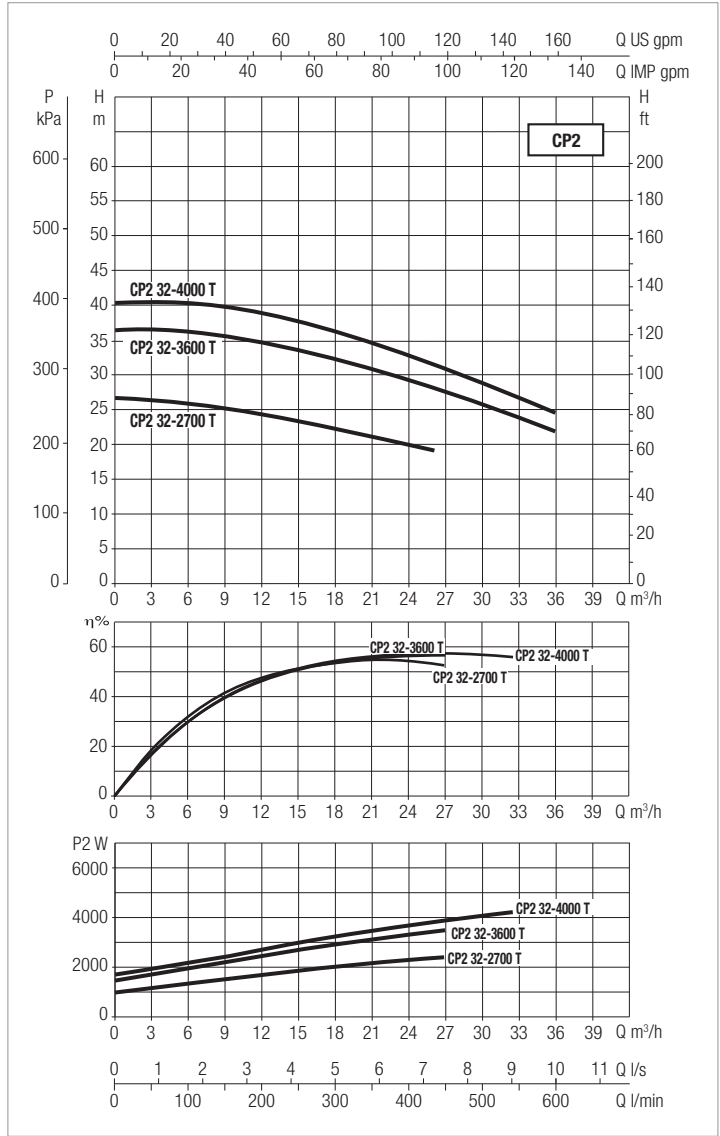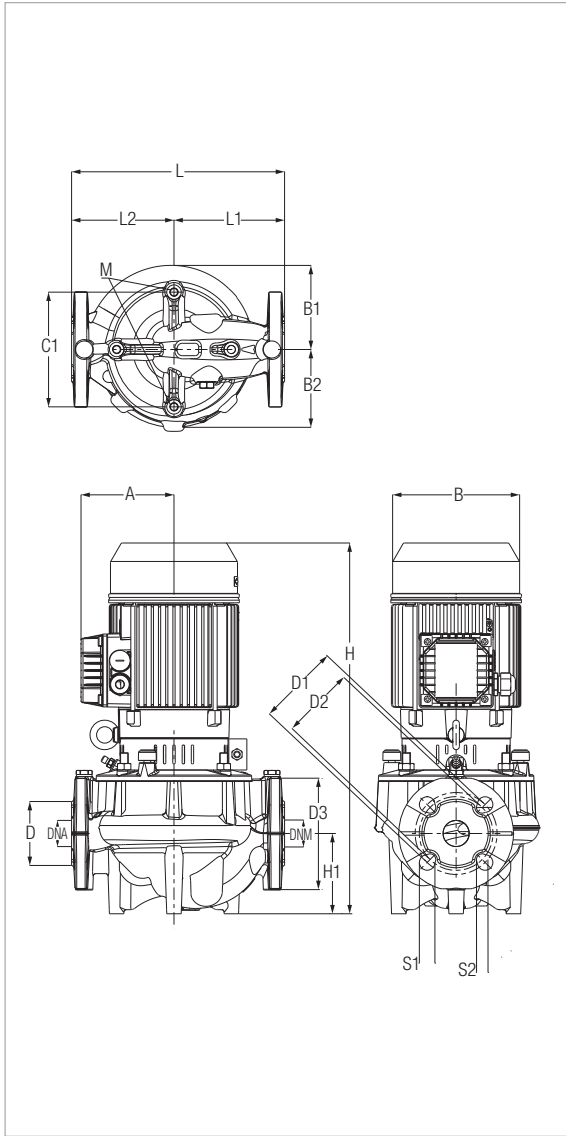



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
CP2 32-2700 T	320	DN 32 PN 16 DN 32 PN 10	230-400V	2,9	2,2	2,99	9 A	5,2 A
CP2 32-3600 T				4,08	3	4,08	12,3 A	7,1 A
CP2 32-4000 T				4,95	4	5,44	15,1	8,7 A

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
	L/A	L/B	H																					
CP2 32-2700 T	118	160	102	94	140	80	100	14	90	19	140	32	33	526	90	320	165	155	10	0,52	0,29	0,7	0,11	37
CP2 32-3600 T	135	193	130	125	180	80	100	14	90	19	140	32	33	535	90	320	165	155	10	0,52	0,29	0,7	0,11	45
CP2 32-4000 T	135	193	130	125	180	80	100	14	90	19	140	32	33	535	90	320	165	155	10	0,52	0,29	0,7	0,11	45

CP2-G - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

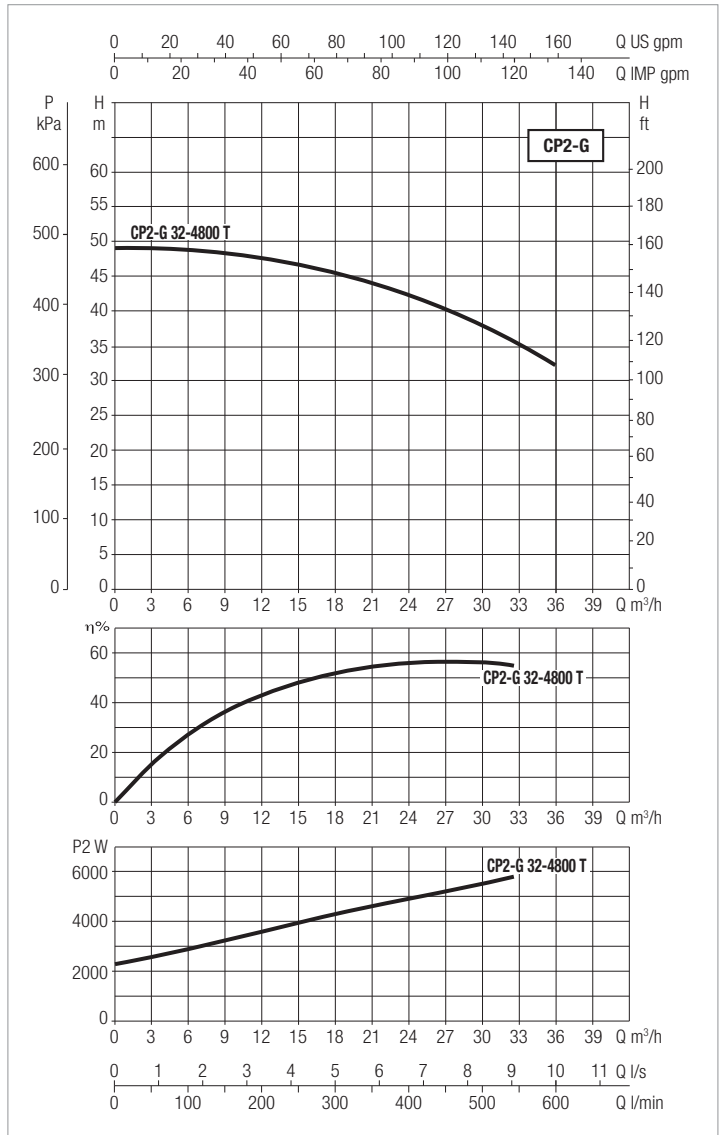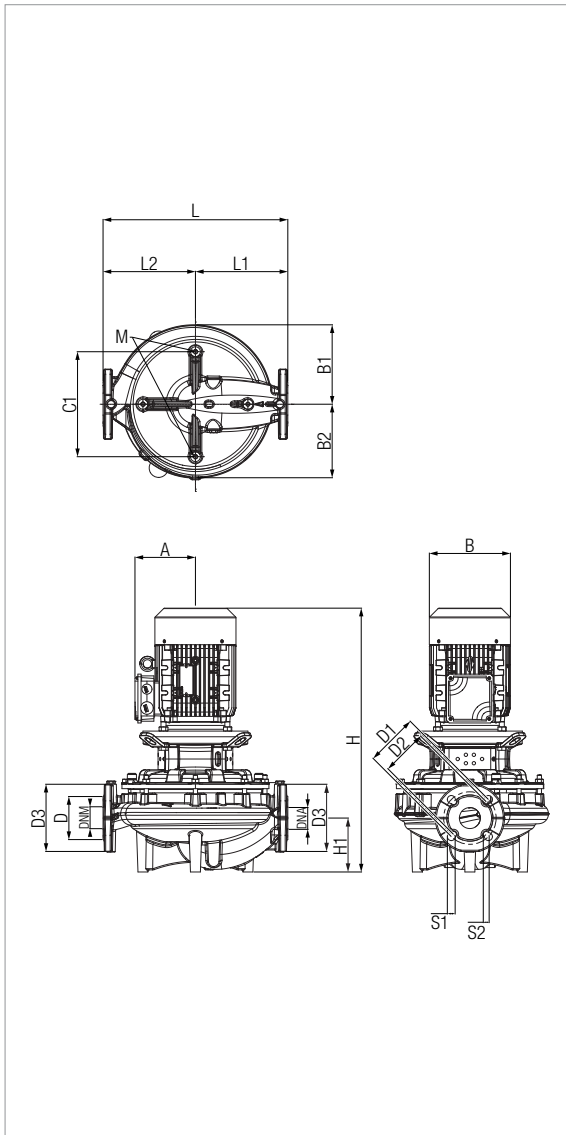



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
CP2-G 32-4800 T	320	DN 32 PN 16 DN 32 PN 10	400-690V	6,5	5,5	7,48	18,2A	10,5A

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CP2-G 32-4800 T	202	258	129	120	180	80	100	14	90	19	140	32	33	689	90	320	165	155	10	0,7	0,6	1,1	0,46	74

CP2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

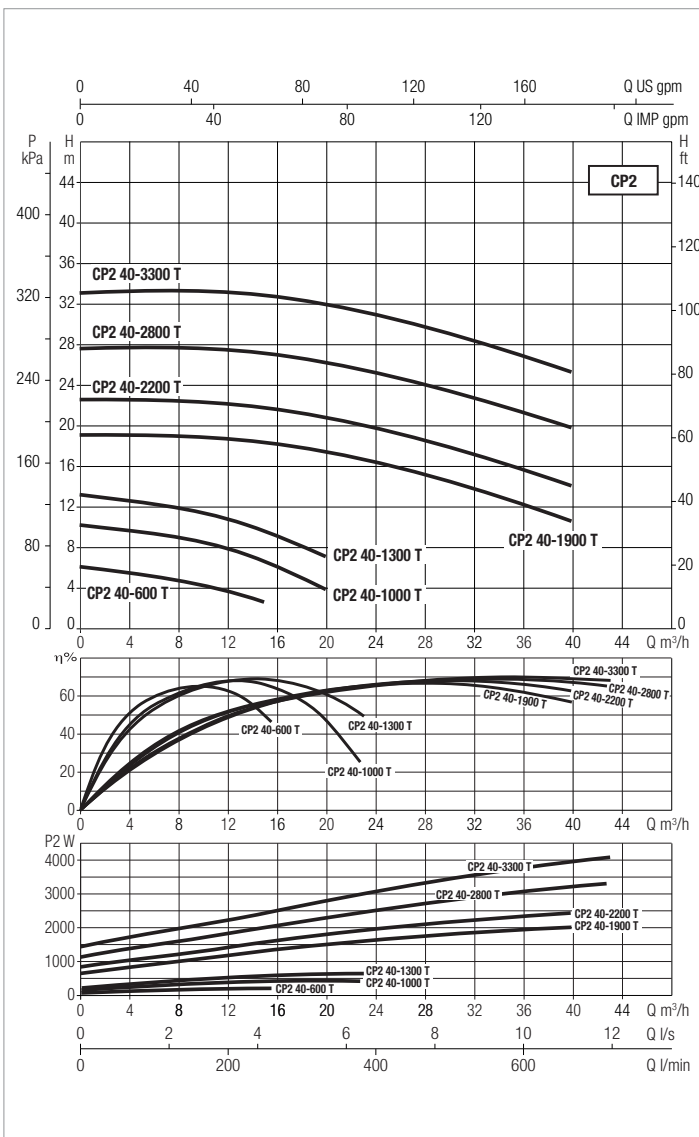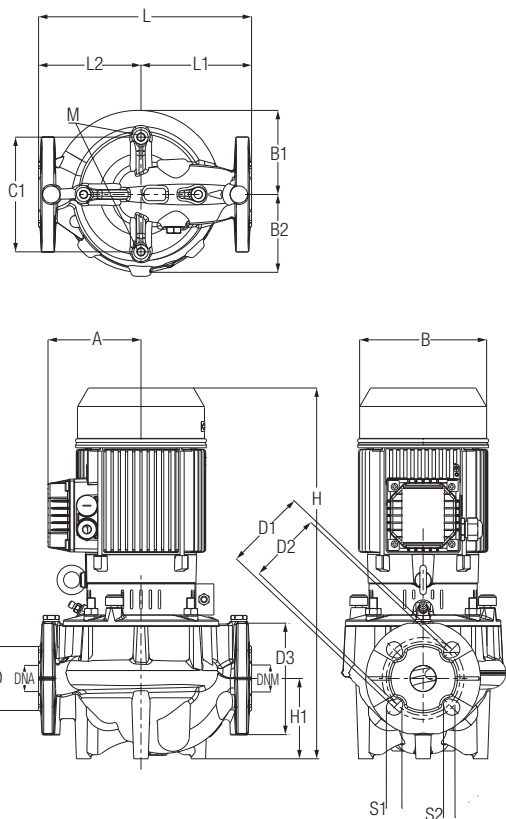

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
CP2 40-600 T	250	DN 40 PN 16 DN 40 PN 10	230-400V	0.37	0.25	0.33	1.7	1
CP2 40-1000 T				0.48	0.37	0.55	2.1	1.2
CP2 40-1300 T				0.73	0.55	0.75	2.6	1.5
CP2 40-1900 T	320			1.83	1.5	2	7.8	4.5
CP2 40-2200 T				2.9	2.2	3	9.7	5.6
CP2 40-2800 T				4.08	3	4	12.5	7.2
CP2 40-3300 T				4.95	4	5.5	16.1	9.3

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CP2 40-600 T	110	143	105	90	100	80	110	21,5	100	21,5	150	40	40	396	66	250	125	125	10	0,60	0,30	0,50	0,09	24,60
CP2 40-1000 T	110	143	105	90	100	80	110	21,5	100	21,5	150	40	40	396	66	250	125	125	10	0,60	0,30	0,50	0,09	24,60
CP2 40-1300 T	110	143	105	90	100	80	110	21,5	100	21,5	150	40	40	396	66	250	125	125	10	0,60	0,30	0,50	0,09	24,60
CP2 40-1900 T	118	155	130,6	130,6	180	88	110	20	100	20	150	40	40	522	95	320	168	152	10	0,60	0,30	0,50	0,09	40,20
CP2 40-2200 T	118	155	130,6	130,6	180	88	110	20	100	20	150	40	40	522	95	320	168	152	10	0,60	0,30	0,50	0,09	40,20
CP2 40-2800 T	134,5	187	130,6	130,6	180	88	110	20	100	20	150	40	40	531	95	320	168	152	10	0,60	0,30	0,50	0,09	49,80
CP2 40-3300 T	134,5	187	130,6	130,6	180	88	110	20	100	20	150	40	40	531	95	320	168	152	10	0,60	0,30	0,50	0,09	49,80



CP2-G - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

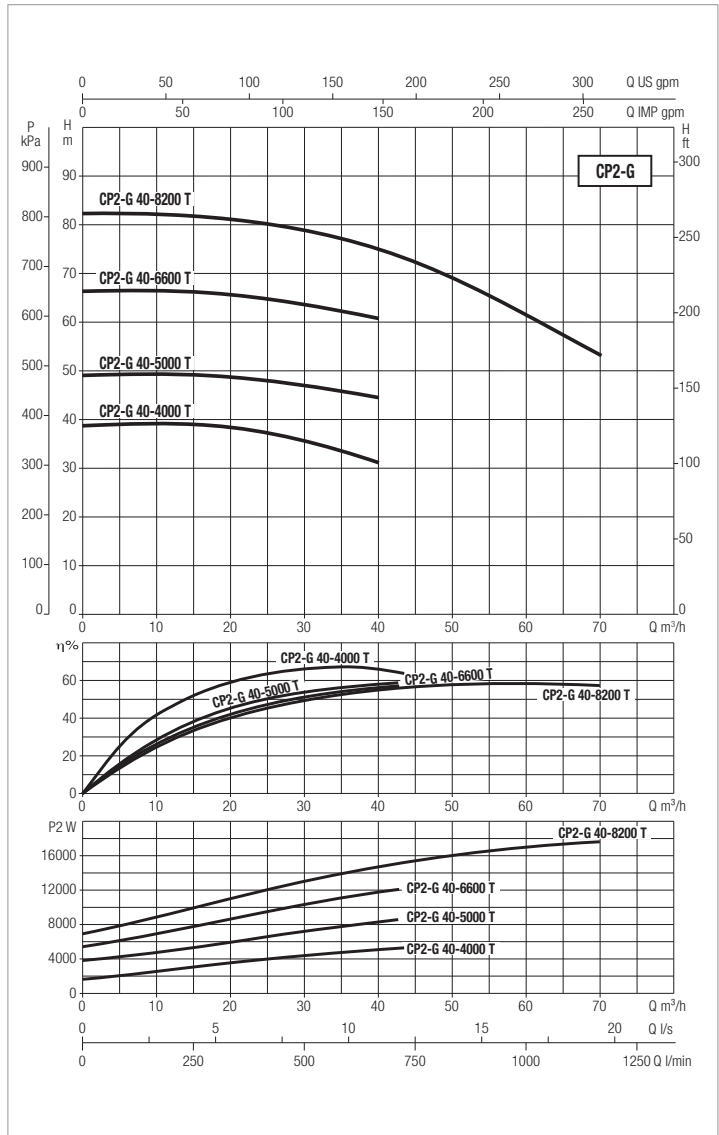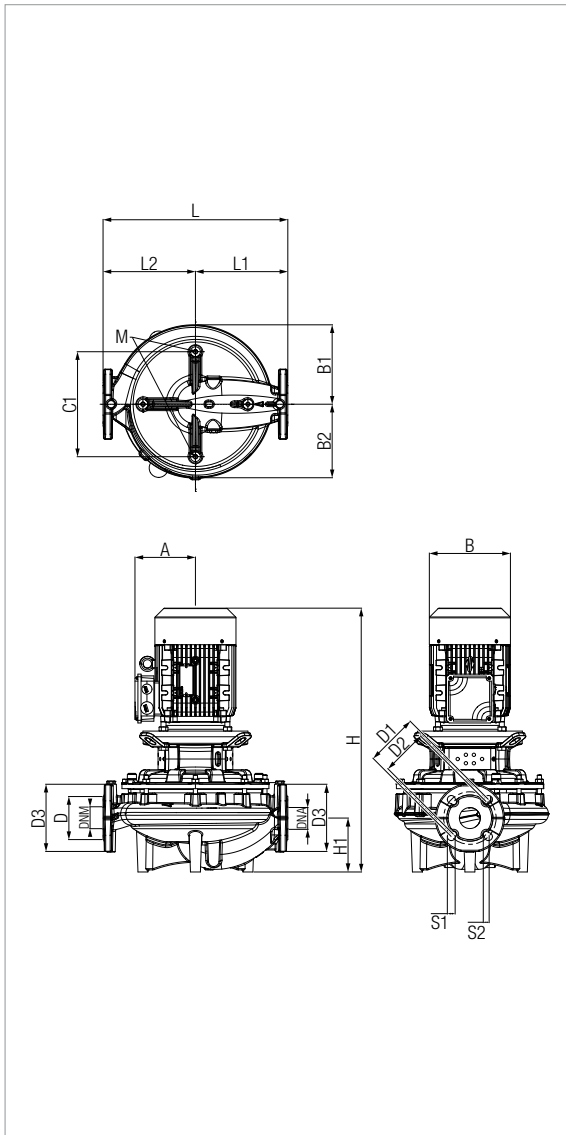



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
CP2-G 40-4000 T	320	DN 40 PN 16 DN 40 PN 10	400-690V	6.76	5.5	7,5	10.9	6.3
CP2-G 40-5000 T	440			12.6	7.5	10	20.2	11.7
CP2-G 40-6600 T				16.5	11	15	25.9	15.0
CP2-G 40-8200 T				19.5	15	20	31.7	18.3

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CP2-G 40-4000 T	202	262	150	150	180	88	110	20	100	20	150	40	40	693,5	95	320	168	152	10	0,37	0,30	0,69	0,08	102,80
CP2-G 40-5000 T	188	260	180	180	250	88	110	20	100	20	150	40	40	715,5	99,5	440	220	220	10	0,44	0,36	0,72	0,11	118,80
CP2-G 40-6600 T	194,5	248	180	180	250	88	110	20	100	20	150	40	40	838,5	99,5	440	220	220	10	0,44	0,36	0,84	0,13	166,70
CP2-G 40-8200 T	194,5	248	180	180	250	88	110	20	100	20	150	40	40	838,5	99,5	440	220	220	10	0,44	0,36	0,84	0,13	166,70

CP2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

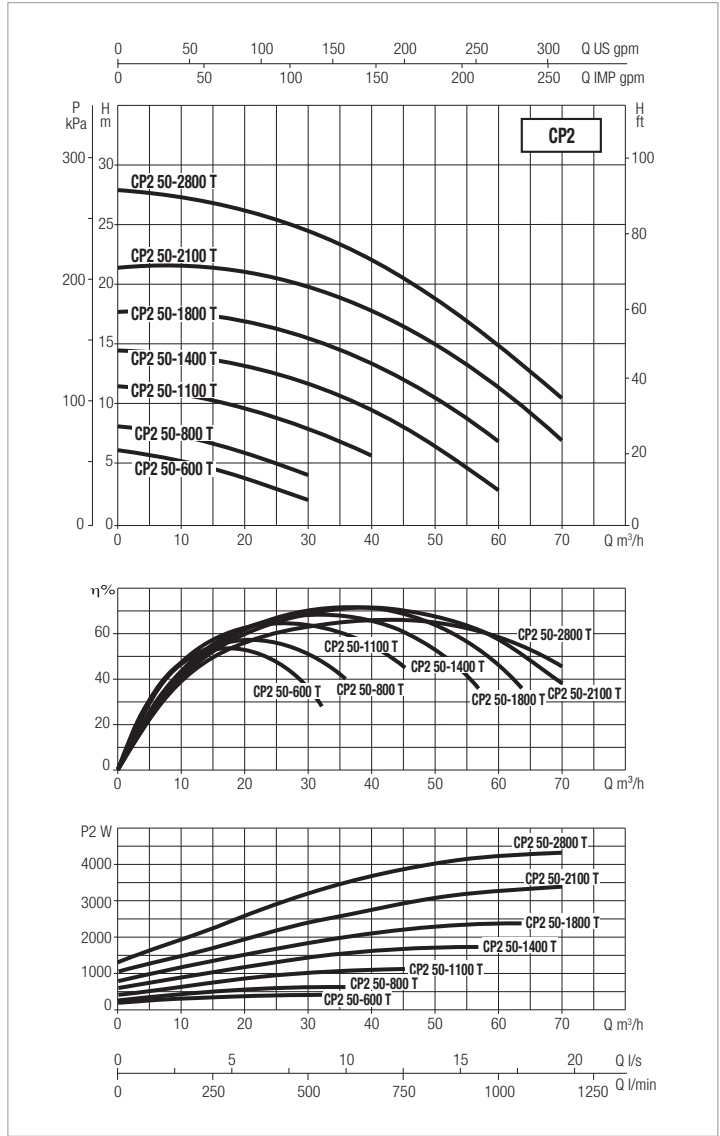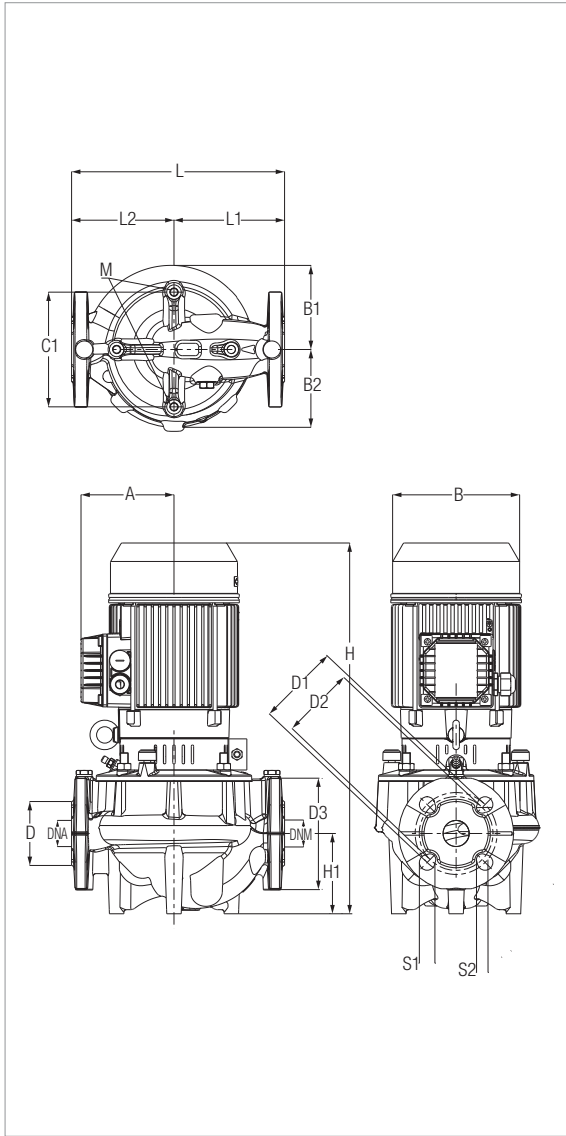



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
CP2 50-600 T	280	DN 50 PN 16 DN 50 PN 10	230-400V	0.54	0.55	0.75	2.1	1.2
CP2 50-800 T				0.82	0.55	0.75	2.6	1.5
CP2 50-1100 T				1.4	0.8	1	4.2	2.4
CP2 50-1400 T				2.1	1.85	2.5	6.8	3.9
CP2 50-1800 T				2.8	2.2	3	8.8	5.1
CP2 50-2100 T				3.9	3	4	11.8	6.8
CP2 50-2800 T	340			5.1	4	5.5	15.2	8.8

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CP2 50-600 T	110	143	112,3	96	100	90	125	23,3	110	18	165	50	50	415	73	280	140	140	10	0,60	0,30	0,50	0,09	28,2
CP2 50-800 T	110	143	112,3	96	100	90	125	23,3	110	18	165	50	50	415	73	280	140	140	10	0,60	0,30	0,50	0,09	28,2
CP2 50-1100 T	110	143	112,3	96	100	90	125	23,3	110	18	165	50	50	415	73	280	140	140	10	0,60	0,30	0,50	0,09	28,2
CP2 50-1400 T	118	155	112,3	96	100	90	125	23,3	110	18	165	50	50	497	73	280	140	140	10	0,60	0,30	0,50	0,09	36,9
CP2 50-1800 T	118	155	112,3	96	100	90	125	23,3	110	18	165	50	50	497	73	280	140	140	10	0,60	0,30	0,50	0,09	36,9
CP2 50-2100 T	134,5	187	112,3	96	100	90	125	23,3	110	18	165	50	50	486,5	73	280	140	140	10	0,60	0,30	0,50	0,09	46,2
CP2 50-2800 T	134,5	187	136,4	131,2	180	100	125	21,8	110	14	165	50	50	560	105	340	172,5	167,5	10	0,60	0,30	0,50	0,09	52,6

CP2-G - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

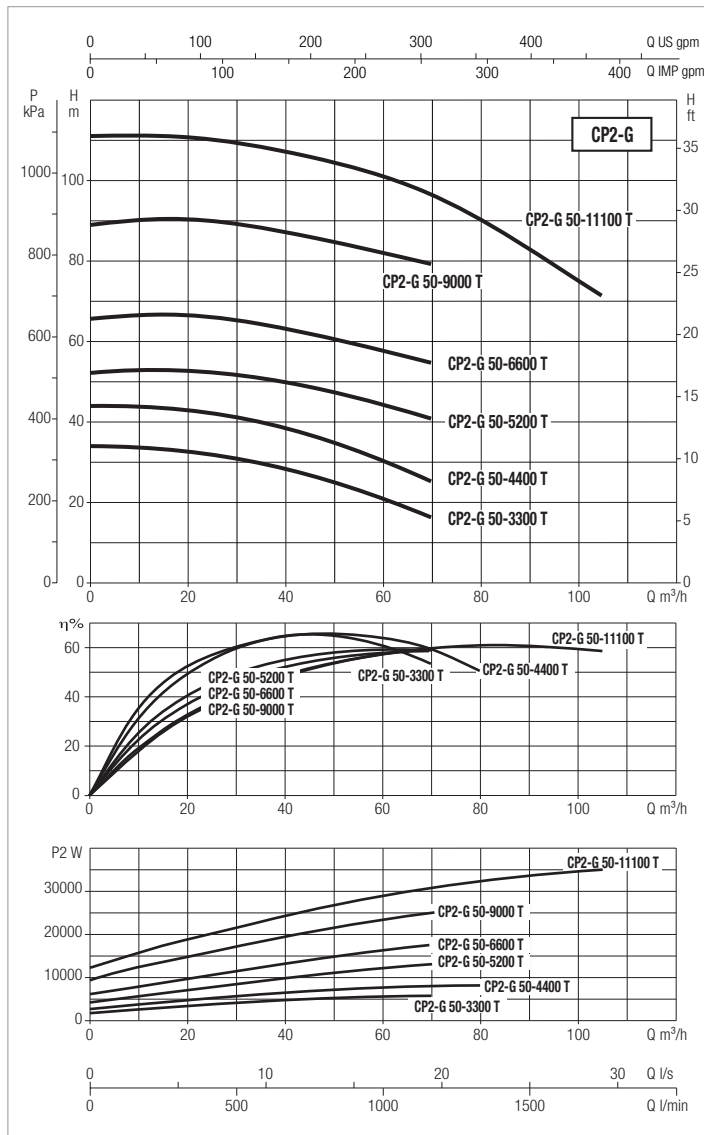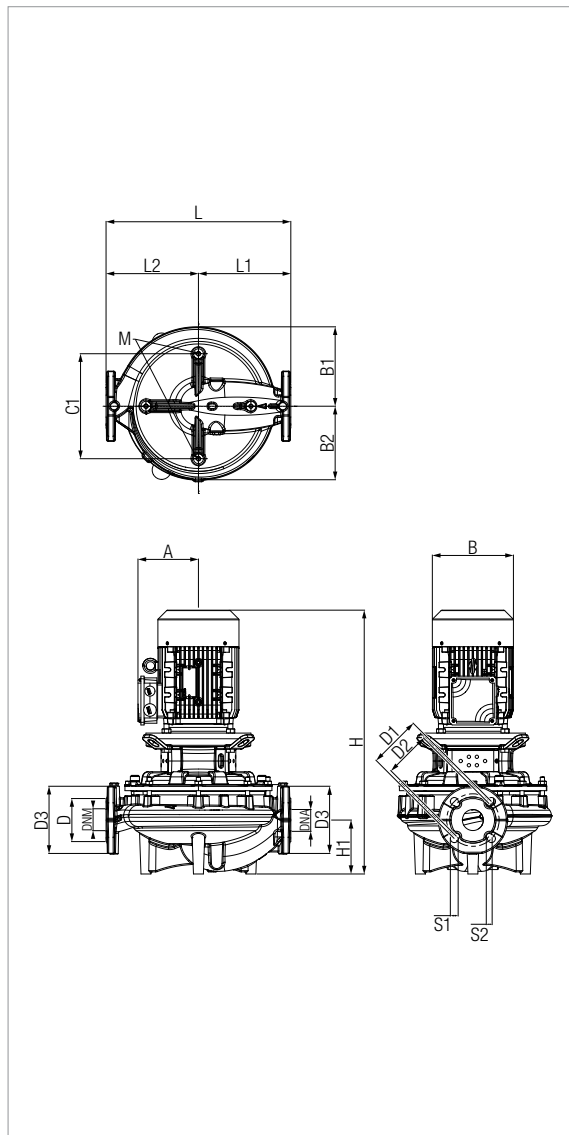



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
CP2-G 50-3300 T	340	DN 50 PN 16 DN 50 PN 10	400-690V	6.4	5.5	7.5	10.7	6.2
CP2-G 50-4400 T				9.1	7.5	10	14.8	8.5
CP2-G 50-5200 T				17.1	11	15	26.9	15.5
CP2-G 50-6600 T				23.1	15	22	37.4	21.6
CP2-G 50-9000 T				33.8	22	30	54.5	31.5
CP2-G 50-11100 T				39.4	30	40	66.1	38.2

MODEL	A	B	B1	B2	C1	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																				L/A	L/B	H		
CP2-G 50-3300 T	202	262	136,4	131,2	180	100	125	21,8	110	14	165	50	50	721,5	105	340	172,5	167,5	10	0,38	0,30	0,70	0,08	106,1
CP2-G 50-4400 T	202	262	136,4	131,2	180	100	125	21,8	110	14	165	50	50	721,5	105	340	172,5	167,5	10	0,38	0,30	0,70	0,08	106,1
CP2-G 50-5200 T	194,5	248	189	180	180	100	125	21,8	110	14	165	50	50	866	128,4	440	220	220	10	0,44	0,37	0,87	0,14	160,8
CP2-G 50-6600 T	194,5	248	189	180	180	100	125	21,8	110	14	165	50	50	866	128,4	440	220	220	10	0,44	0,37	0,87	0,14	160,8
CP2-G 50-9000 T	261	355,5	189	180	180	100	125	21,8	110	14	165	50	50	967	128,4	440	220	220	10	0,48	0,37	0,97	0,17	283
CP2-G 50-11100 T	296	396	189	180	180	100	125	21,8	110	14	165	50	50	1027	128,4	440	220	220	10	0,52	0,40	1,00	0,21	311,2

DCM2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

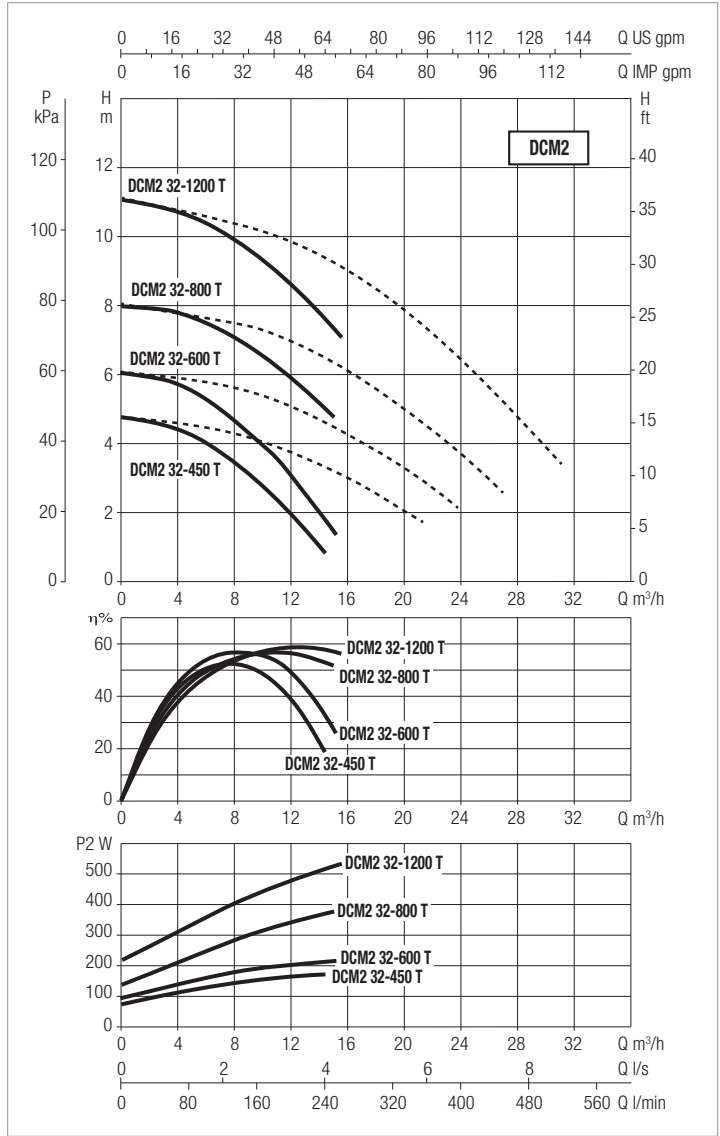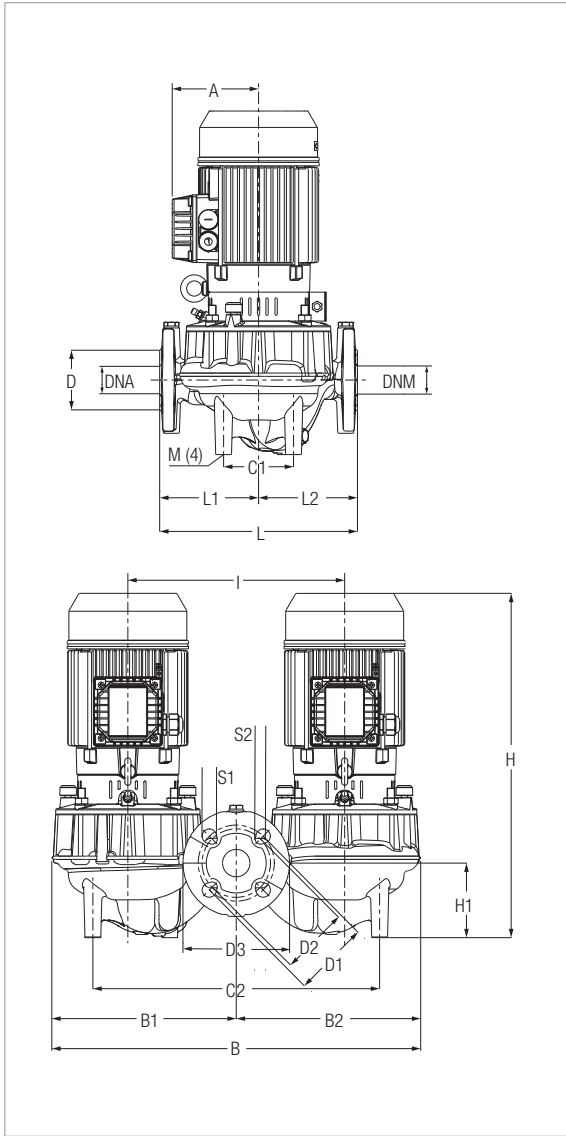



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
DCM2 32-450 T	260	DN 32 PN 16 DN 32 PN 10	230-400V	0,26	0,25	0,34	1,2 A	0,7 A
DCM2 32-600 T				0,33	0,25	0,34	1,3 A	0,8 A
DCM2 32-800 T	320			0,51	0,37	0,50	2,0 A	1,2 A
DCM2 32-1200 T				0,73	0,55	0,75	2,4 A	1,4 A

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																						L/A	L/B	H		
DCM2 32-450 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCM2 32-600 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCM2 32-800 T	110	609	305	305	113	463	78	100	14	90	19	140	33	33	459	90	350	320	150	170	10	684	426	834	0,245	54,5
DCM2 32-1200 T	110	609	305	305	113	463	78	100	14	90	19	140	33	33	459	90	350	320	150	170	10	684	426	834	0,245	54,5

DCM2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

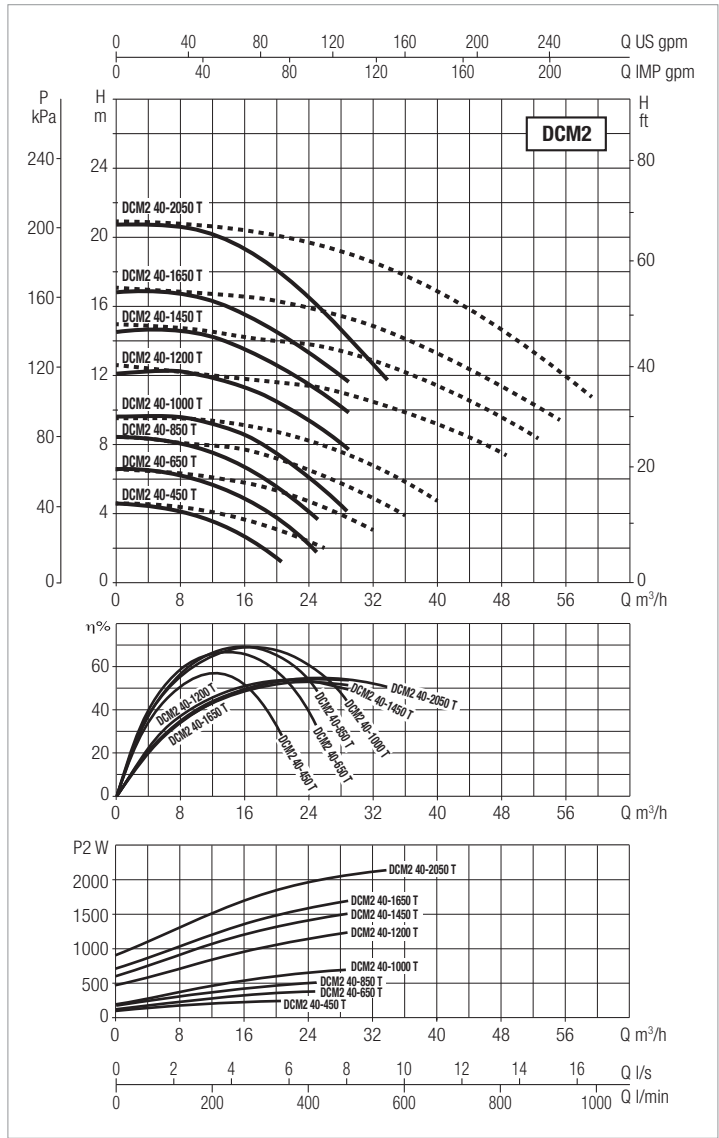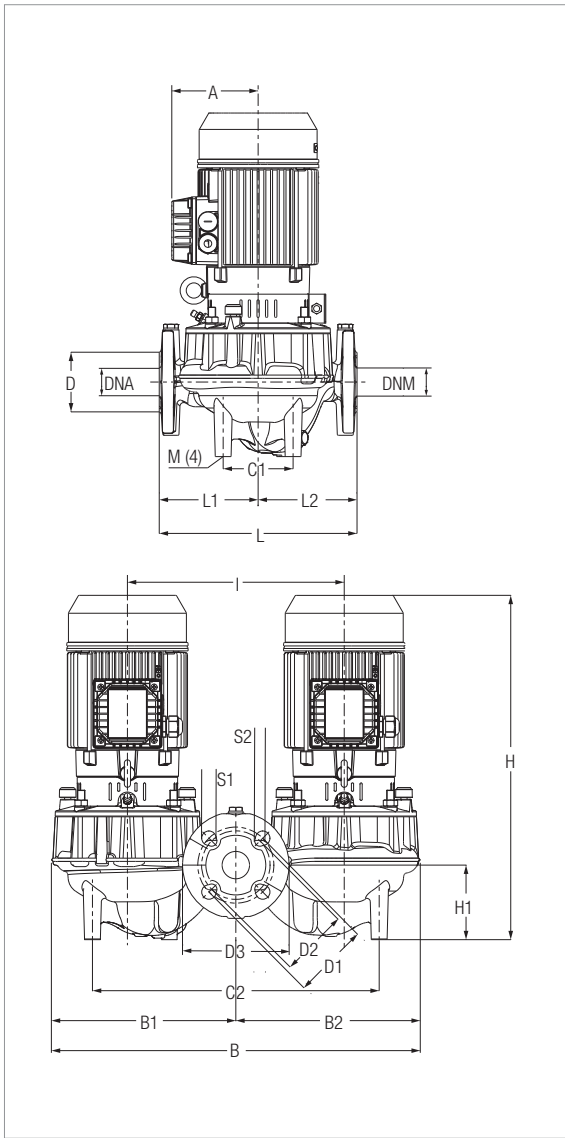

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
DCM2 40-450 T	320	DN 40 PN 16 DN 40 PN 10	230-400V	0.26	0.25	0.33	1.2	0.7
DCM2 40-650 T				0.51	0.37	0.55	1.9	1.1
DCM2 40-850 T				0.73	0.55	0.75	2.3	1.3
DCM2 40-1000 T				0.73	0.55	0.75	2.9	1.7
DCM2 40-1200 T	440			1.58	2.2	3	7.6	4.4
DCM2 40-1450 T				1.9	2.2	3	8	4.6
DCM2 40-1650 T				2.12	2.2	3	8.5	4.9
DCM2 40-2050 T				2.49	2.2	3	9.2	5.3

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																						L/A	L/B	H		
DCM2 40-450 T	110	622	311	311	113	463	88	110	20	100	20	150	40	40	440	95	350	320	170	150	10	0.72	0.60	0.58	0.25	65.20
DCM2 40-650 T	110	622	311	311	113	463	88	110	20	100	20	150	40	40	455	95	350	320	170	150	10	0.72	0.60	0.58	0.25	65.20
DCM2 40-850 T	110	622	311	311	113	463	88	110	20	100	20	150	40	40	455	95	350	320	170	150	10	0.72	0.60	0.58	0.25	65.20
DCM2 40-1000 T	113,5	622	311	311	113	463	88	110	20	100	20	150	40	40	448	95	350	320	170	150	10	0.72	0.60	0.58	0.25	68.20
DCM2 40-1200 T	134,5	770	385	385	177	577	88	110	20	100	20	150	40	40	560,5	99,5	400	440	240	200	10	1.13	0.58	0.74	0.48	128,90
DCM2 40-1450 T	134,5	770	385	385	177	577	88	110	20	100	20	150	40	40	560,5	99,5	400	440	240	200	10	1.13	0.58	0.74	0.48	128,90
DCM2 40-1650 T	134,5	770	385	385	177	577	88	110	20	100	20	150	40	40	560,5	99,5	400	440	240	200	10	1.13	0.58	0.74	0.48	128,90
DCM2 40-2050 T	134,5	770	385	385	177	577	88	110	20	100	20	150	40	40	560,5	99,5	400	440	240	200	10	1.13	0.58	0.74	0.48	128,90

DCM2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

IN-LINE PUMPS

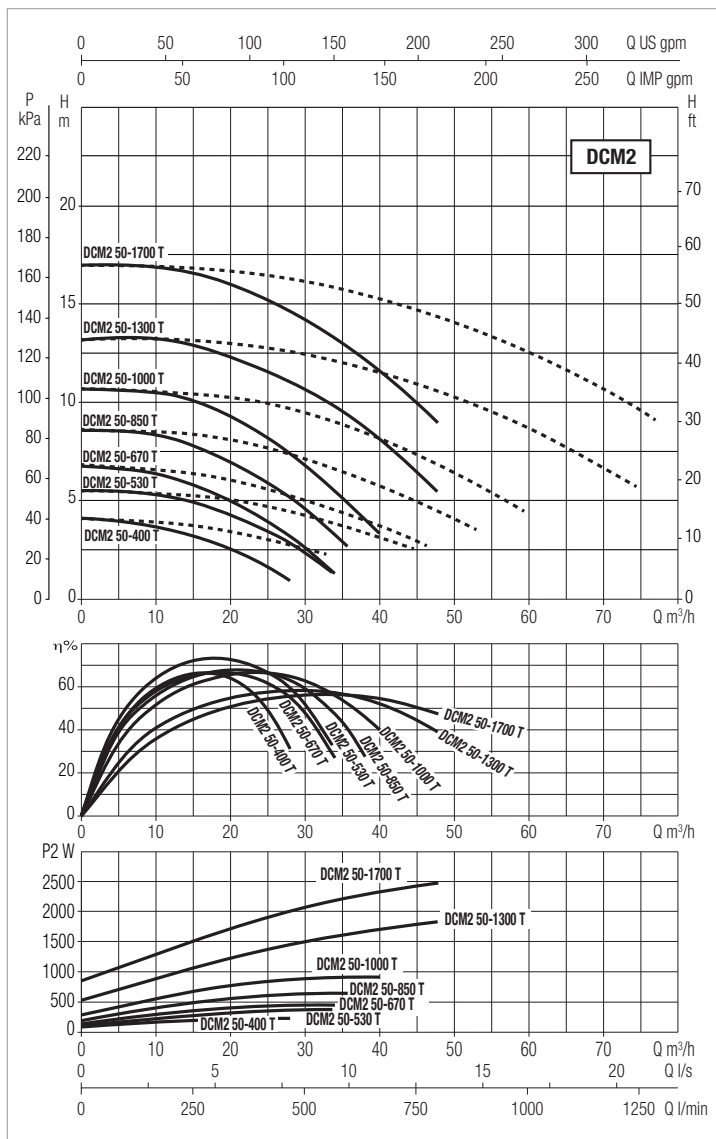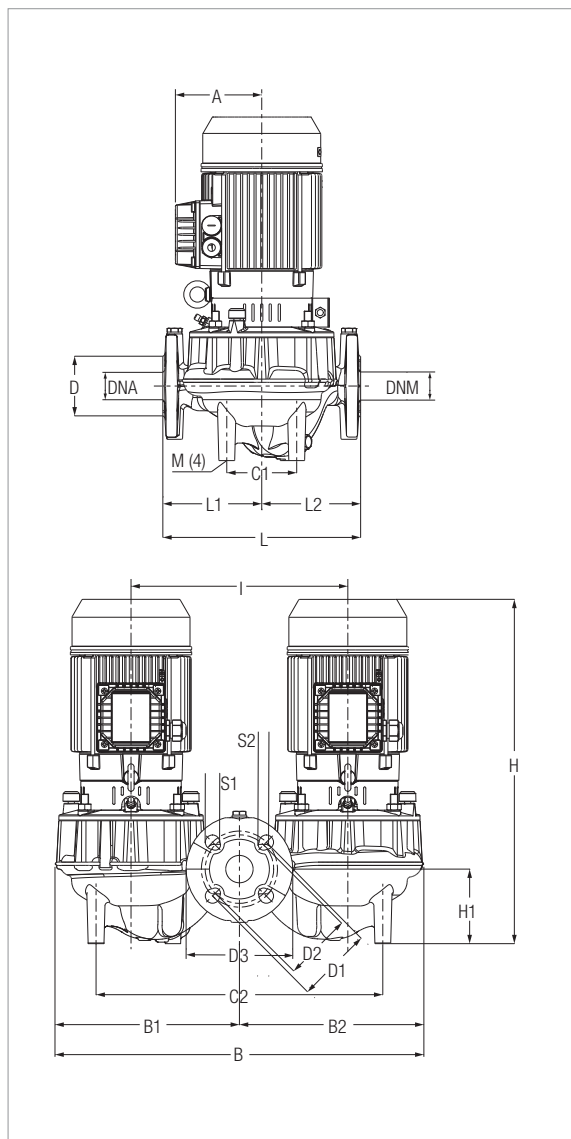

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
DCM2 50-400 T	280	DN 50 PN 16 DN 50 PN 10	230-400V	0.34	0.2	0.27	1.3	0.77
DCM2 50-530 T				0.49	0.55	0.75	1.9	1.1
DCM2 50-670 T	340			0.59	0.55	0.75	2.1	1.2
DCM2 50-850 T				0.83	0.75	1	2.9	1.7
DCM2 50-1000 T	440			1.11	1.1	1.5	6.9	4
DCM2 50-1300 T				2.15	2.2	3	8.3	4.8
DCM2 50-1700 T				3.3	3	4	10	5.8

MODEL	PACKING DIMENSIONS																				VOLUME (mc)	WEIGHT Kg				
	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2			M			
	L/A	L/B	H																							
DCM2 50-400 T	110	530	261	270	92	392	90	125	23,3	110	18	165	50	50	415	73	300	280	133	147	10	0,72	0,6	0,58	0,25	58,2
DCM2 50-530 T	110	530	261	270	92	392	90	125	23,3	110	18	165	50	50	430,5	73	300	280	133	147	10	0,72	0,6	0,58	0,25	58,2
DCM2 50-670 T	110	631	313	319	113	463	100	125	21,8	110	14	165	50	50	483,5	105	350	340	190	150	10	0,72	0,6	0,58	0,25	70,8
DCM2 50-850 T	118	631	313	319	113	463	100	125	21,8	110	14	165	50	50	483,5	105	350	340	190	150	10	0,72	0,6	0,58	0,25	73,8
DCM2 50-1000 T	134,5	631	313	319	113	463	100	125	21,8	110	14	165	50	50	560	105	350	340	190	150	10	0,72	0,6	0,58	0,25	107
DCM2 50-1300 T	134,5	869	435	435	184	664	100	125	21,8	110	14	165	50	50	589	128,4	480	440	230	210	10	1,13	0,58	0,74	0,48	134,7
DCM2 50-1700 T	134,5	869	435	435	184	664	100	125	21,8	110	14	165	50	50	589	128,4	480	440	230	210	10	1,13	0,58	0,74	0,48	134,7



DCM2-G - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

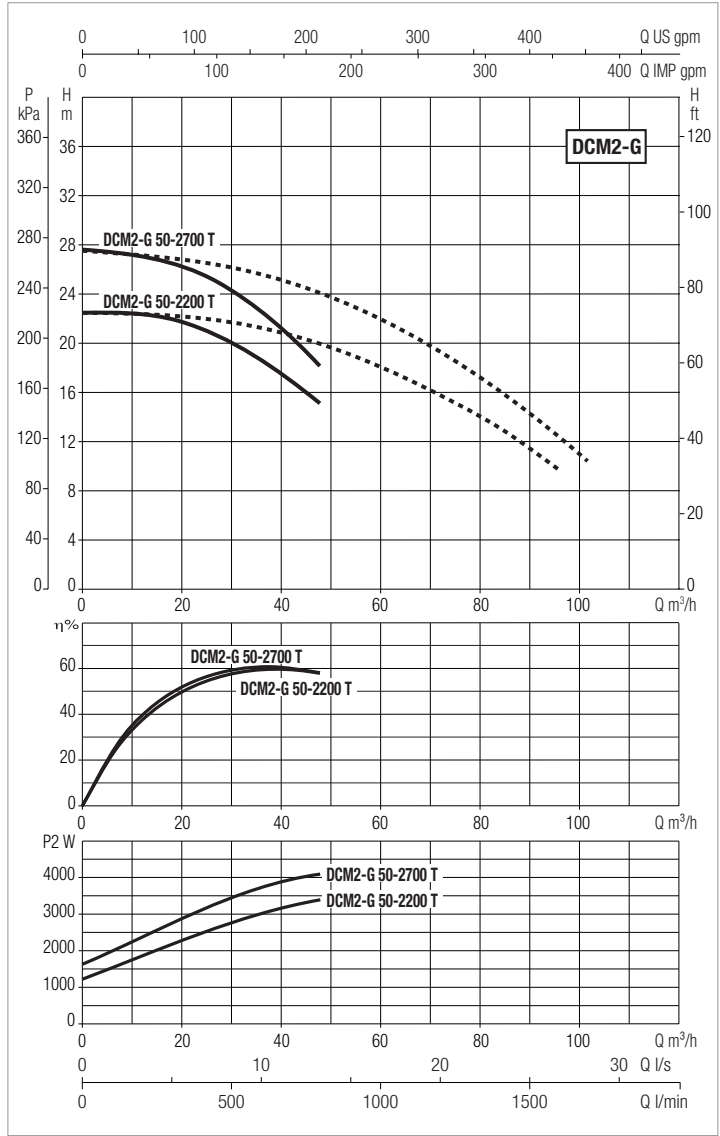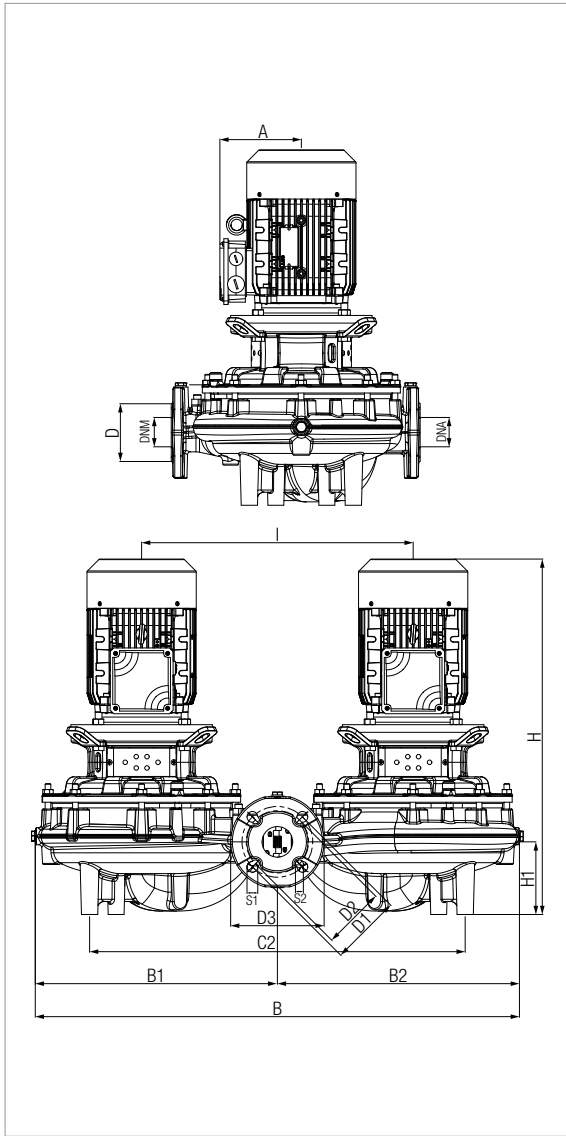



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
DCM2-G 50-2200 T	440	DN 50 PN 16 DN 50 PN 10	400-690V	4.2	3	4	7.5	4.3
DCM2-G 50-2700 T				4.7	4	5.5	8.4	4.8

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
	L/A	L/B	H																							
DCM2-G 50-2200 T	144	869	435	435	184	664	100	125	21,8	110	14	165	50	50	628	128,4	480	440	230	210	10	0,87	0,44	0,63	0,24	185,6
DCM2-G 50-2700 T	144	869	435	435	184	664	100	125	21,8	110	14	165	50	50	643	128,4	480	440	230	210	10	0,87	0,44	0,64	0,24	188,6

DCP2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

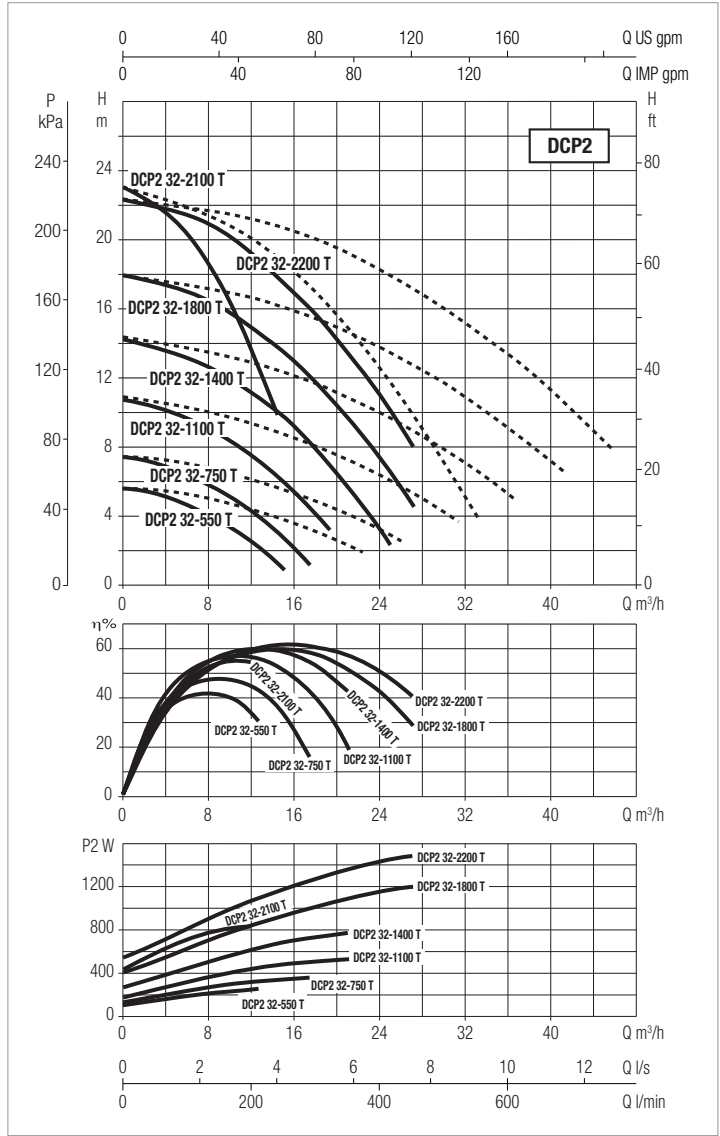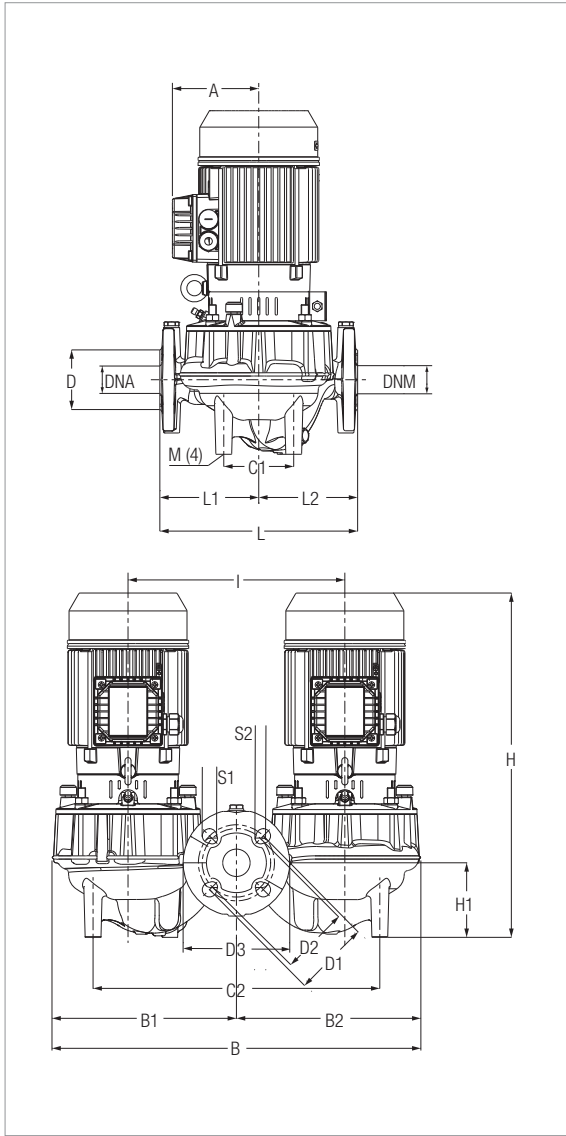



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
DCP2 32-550 T	260	DN 32 PN 16 DN 32 PN 10	230-400V	0,37	0,25	0,34	1,7 A	1 A
DCP2 32-750 T			230-400V	0,48	0,37	0,50	1,9 A	1,1 A
DCP2 32-1100 T			230-400V	0,73	0,55	0,75	2,4 A	1,4 A
DCP2 32-1400 T			230-400V	1,07	0,75	1,02	3,5 A	2 A
DCP2 32-1800 T			230-400V	1,48	1,1	1,50	5,6 A	3,2 A
DCP2 32-2100 T			230-400V	0,85	0,75	1,02	3 A	1,7 A
DCP2 32-2200 T			230-400V	1,83	1,5	2,04	6,3 A	3,6 A

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																						L/A	L/B	H		
DCP2 32-550 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCP2 32-750 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCP2 32-1100 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCP2 32-1400 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCP2 32-1800 T	114	238	242	480	92	377	80	100	14	90	19	140	36	37	453	98	285	260	130	130	10	540	420	610	0,138	49
DCP2 32-2100 T	110	485	243	243	92	377	80	100	14	90	19	140	36	37	445	98	285	260	130	130	10	540	420	610	0,138	46
DCP2 32-2200 T	114	238	242	480	92	377	80	100	14	90	19	140	36	37	453	98	285	260	130	130	10	540	420	610	0,138	49

DCP2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

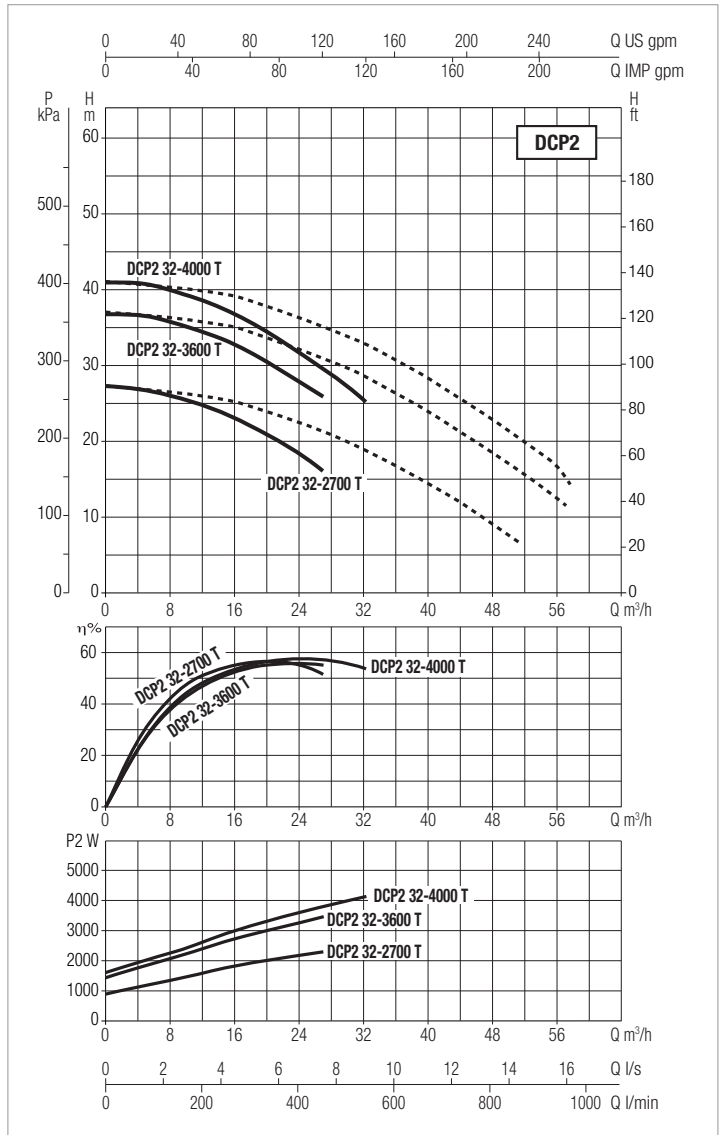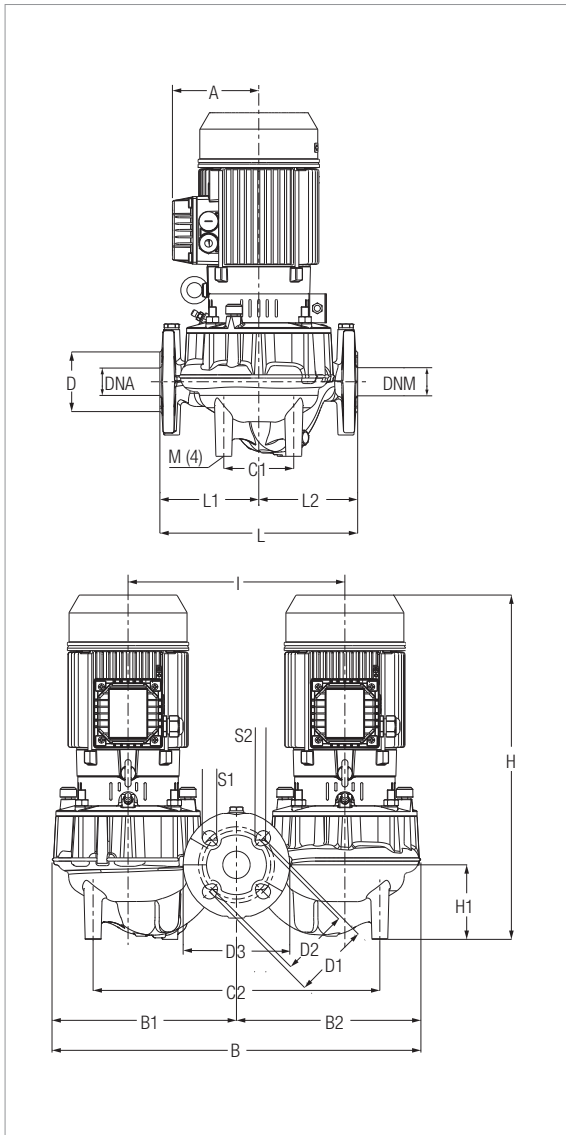



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
DCP2 32-2700 T	320	DN 32 PN 16 DN 32 PN 10	230-400V	2,9	2,2	2,99	9 A	5,2 A
DCP2 32-3600 T			230-400V	4,08	3	4,08	12,3 A	7,1 A
DCP2 32-4000 T			230-400V	4,95	4	5,44	15,1	8,7 A

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																						L/A	L/B	H		
DCP2 32-2700 T	118	609	305	305	113	463	78	100	14	90	19	140	33	33	526	90	350	320	150	170	10	684	426	834	0,245	71,5
DCP2 32-3600 T	135	609	305	305	113	463	78	100	14	90	19	140	33	33	535	90	350	320	150	170	10	684	426	834	0,245	90
DCP2 32-4000 T	135	609	305	305	113	463	78	100	14	90	19	140	33	33	535	90	350	320	150	170	10	684	426	834	0,245	90

DCP2-G - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

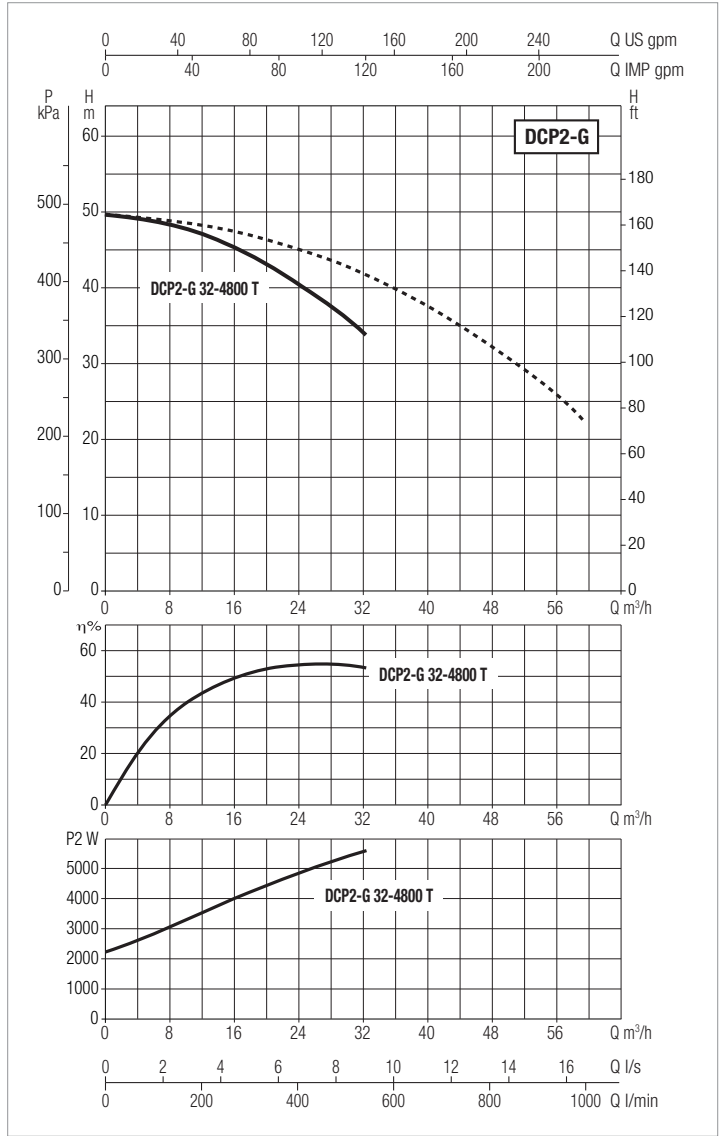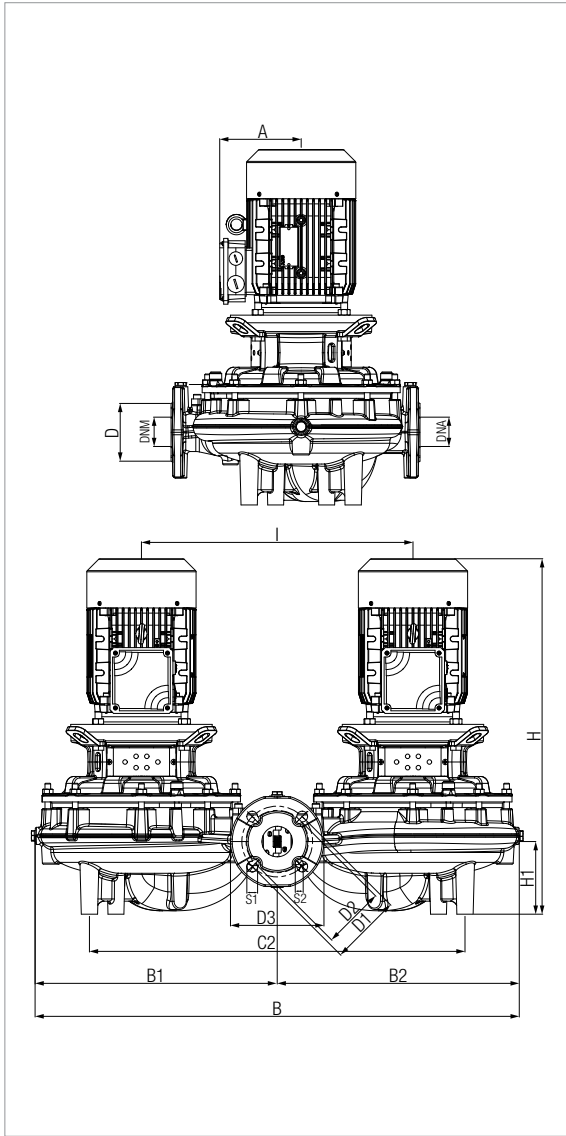



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
DCP2-G 32-4800 T	320	DN 32 PN 16 DN 32 PN 10	400-690V	6,5	5,5	7,48	18,2 A	10,5 A

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																						L/A	L/B	H		
DCP2-G 32-4800 T	202	609	305	305	113	463	78	100	14	90	19	140	33	33	689	90	350	320	150	170	10	926	668	1237	0,765	168

DCP2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

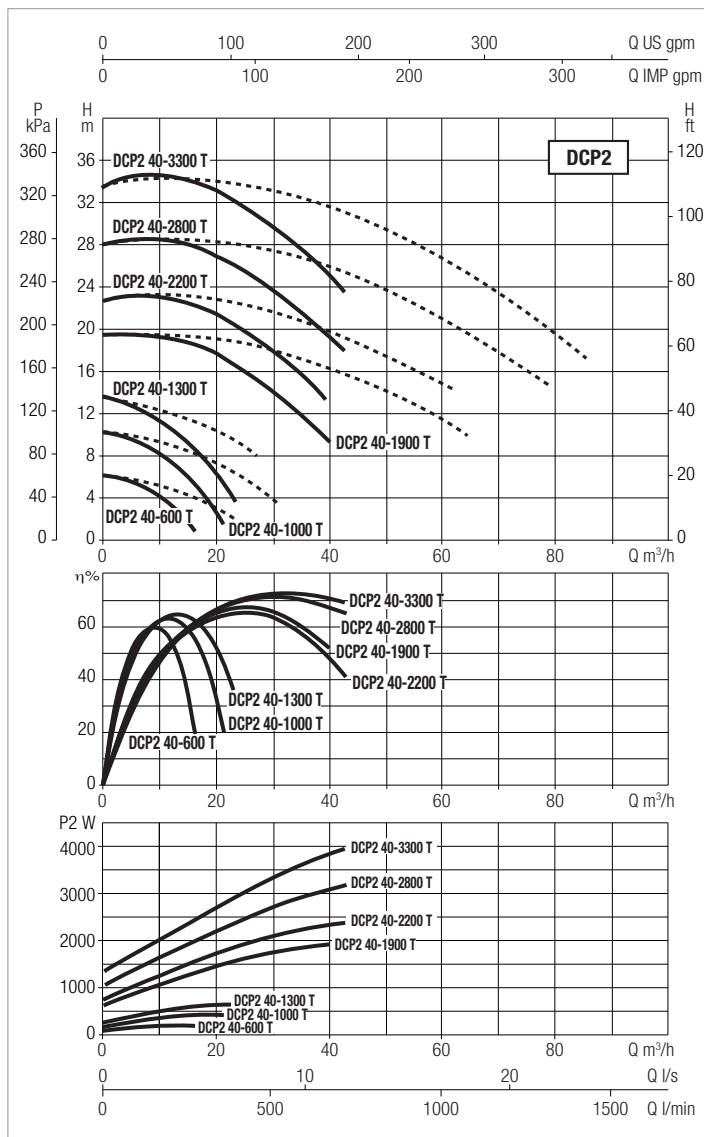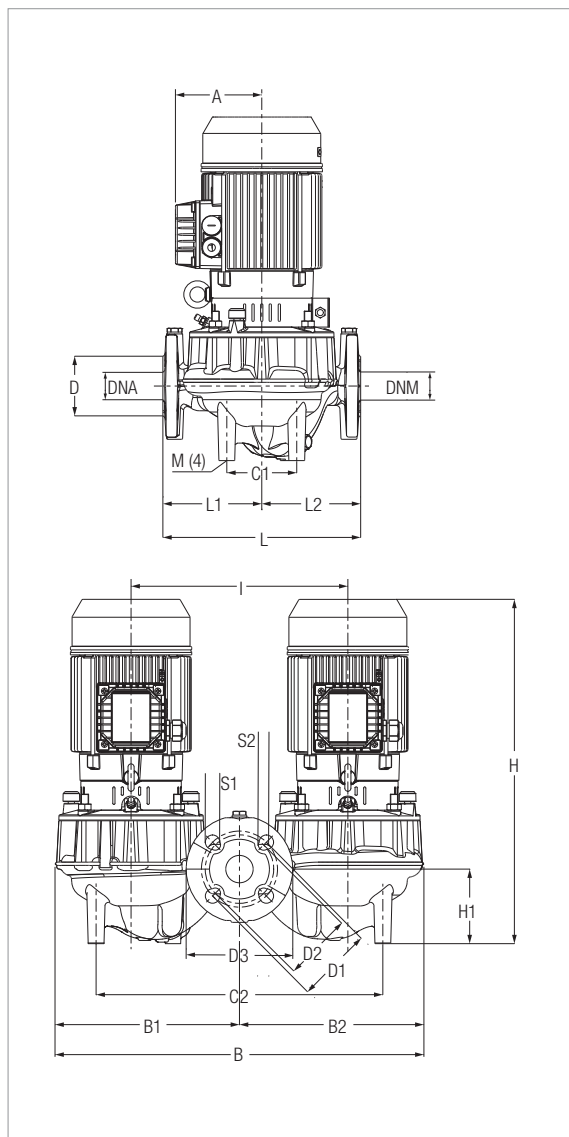

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	ELECTRICAL DATA				
				P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
DCP2 40-600 T	249	DN 40 PN 16 DN 40 PN 10	230-400V	0.37	0.25	0.33	1.7	1
DCP2 40-1000 T				0.48	0.37	0.55	1.9	1.1
DCP2 40-1300 T				0.73	0.55	0.75	2.4	1.4
DCP2 40-1900 T	320			1.83	1.5	2	6.2	3.6
DCP2 40-2200 T				2.9	2.2	3	9	5.2
DCP2 40-2800 T				4.08	3	4	12.3	7.1
DCP2 40-3300 T				4.95	4	5.5	15.1	8.7

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																						L/A	L/B	H		
DCP2 40-600 T	110	437	217	220	100	220	80	110	21,5	100	21,5	150	40	40	396	66	220	250	148	102	10	0,72	0,60	0,58	0,25	51,00
DCP2 40-1000 T	110	437	217	220	100	220	80	110	21,5	100	21,5	150	40	40	396	66	220	250	148	102	10	0,72	0,60	0,58	0,25	51,00
DCP2 40-1300 T	110	437	217	220	100	220	80	110	21,5	100	21,5	150	40	40	396	66	220	250	148	102	10	0,72	0,60	0,58	0,25	51,00
DCP2 40-1900 T	118	622	311	311	113	463	88	110	20	100	20	150	40	40	522	95	350	320	170	150	10	0,72	0,60	0,58	0,25	82,20
DCP2 40-2200 T	118	622	311	311	113	463	88	110	20	100	20	150	40	40	522	95	350	320	170	150	10	0,72	0,60	0,58	0,25	82,20
DCP2 40-2800 T	134,5	622	311	311	113	463	88	110	20	100	20	150	40	40	531	95	350	320	170	150	10	0,72	0,60	0,58	0,25	101,40
DCP2 40-3300 T	134,5	622	311	311	113	463	88	110	20	100	20	150	40	40	531	95	350	320	170	150	10	0,72	0,60	0,58	0,25	101,40

DCP2-G - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

IN-LINE PUMPS

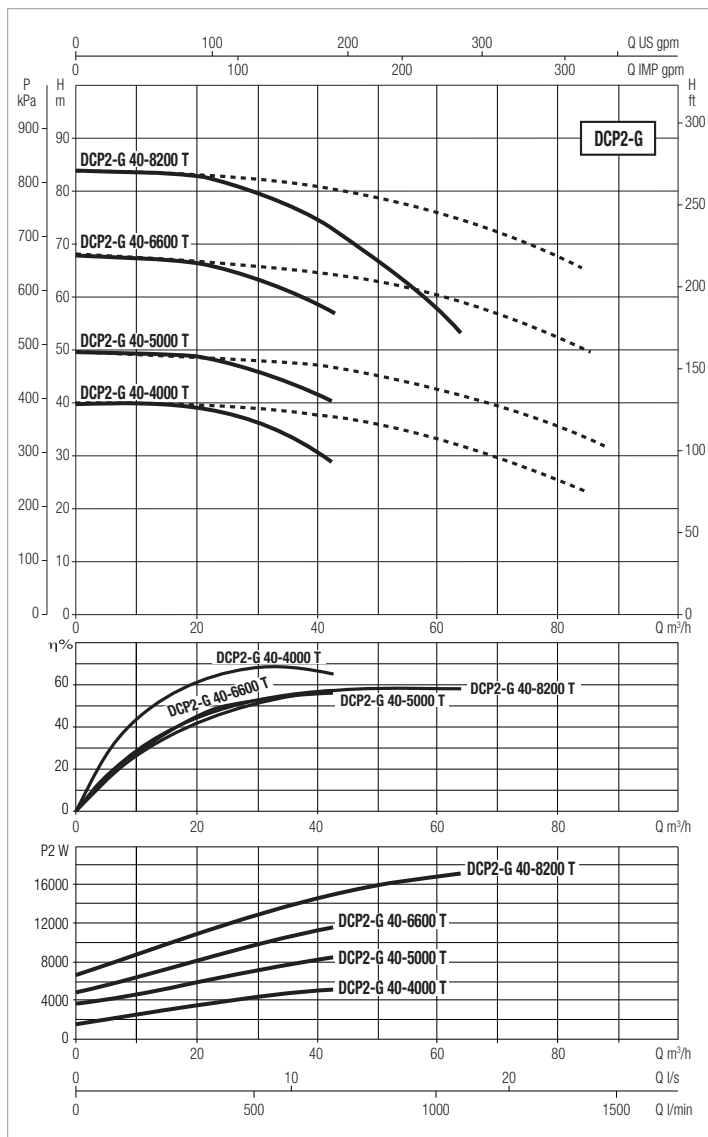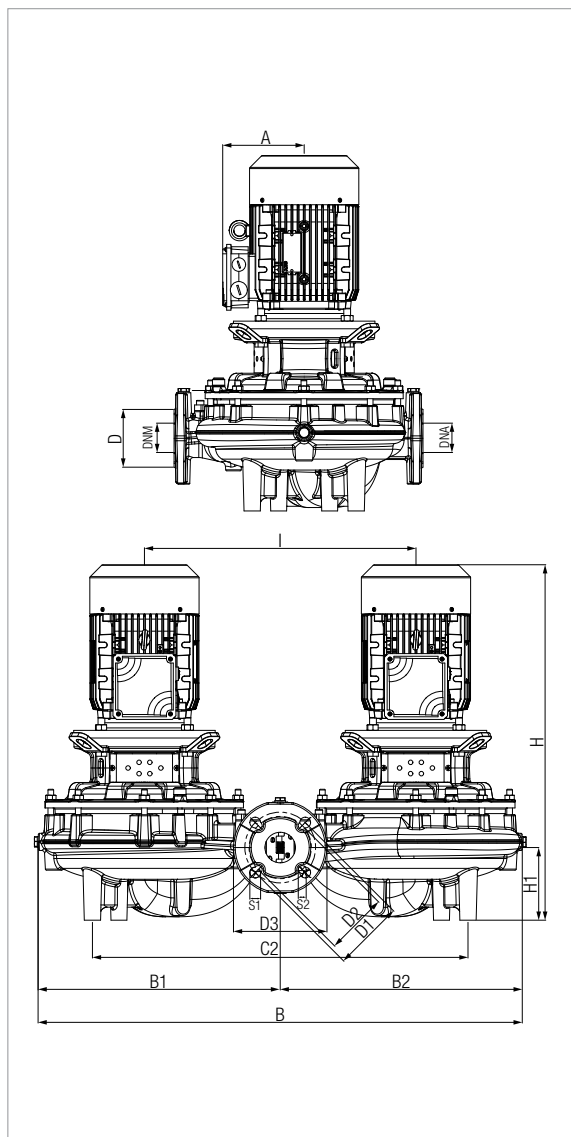



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	ELECTRICAL DATA							
	CENTRE DISTANCE	PUMP CONNECTIONS	POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
DCP2-G 40-4000 T	320	DN 40 PN 16 DN 40 PN 10	400-690V	6.50	5.5	7.5	10.7	6.2
DCP2-G 40-5000 T	440			11.5	7.5	10	18.4	10.6
DCP2-G 40-6600 T				15.6	11	15	25.7	14.8
DCP2-G 40-8200 T				19.4	15	20	33	19.1

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																						L/A	L/B	H		
DCP2-G 40-4000 T	202	622	311	311	113	463	88	110	20	100	20	150	40	40	693,5	95	350	320	170	150	10	0,65	0,35	0,69	0,16	189,20
DCP2-G 40-5000 T	188	770	385	385	177	577	88	110	20	100	20	150	40	40	715,5	99,5	400	440	240	200	10	0,77	0,44	0,72	0,24	221,20
DCP2-G 40-6600 T	194,5	770	385	385	177	577	88	110	20	100	20	150	40	40	838,5	99,5	400	440	240	200	10	0,77	0,44	0,84	0,28	316,80
DCP2-G 40-8200 T	194,5	770	385	385	177	577	88	110	20	100	20	150	40	40	838,5	99,5	400	440	240	200	10	0,77	0,44	0,84	0,28	316,80

DCP2 - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

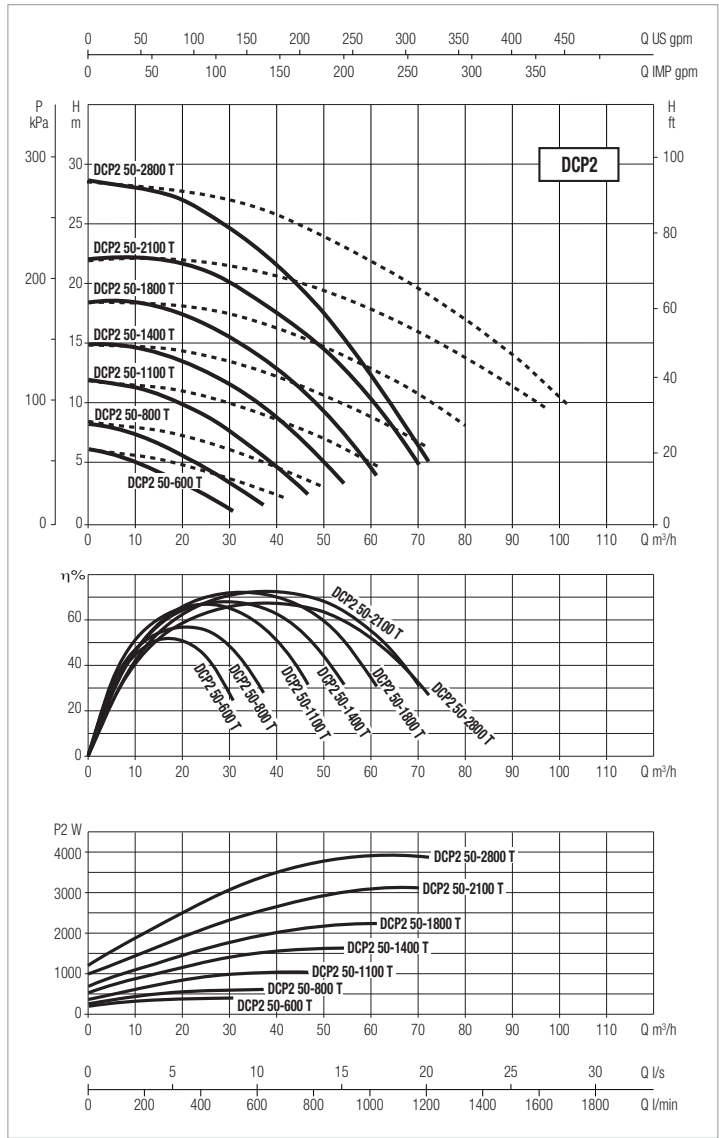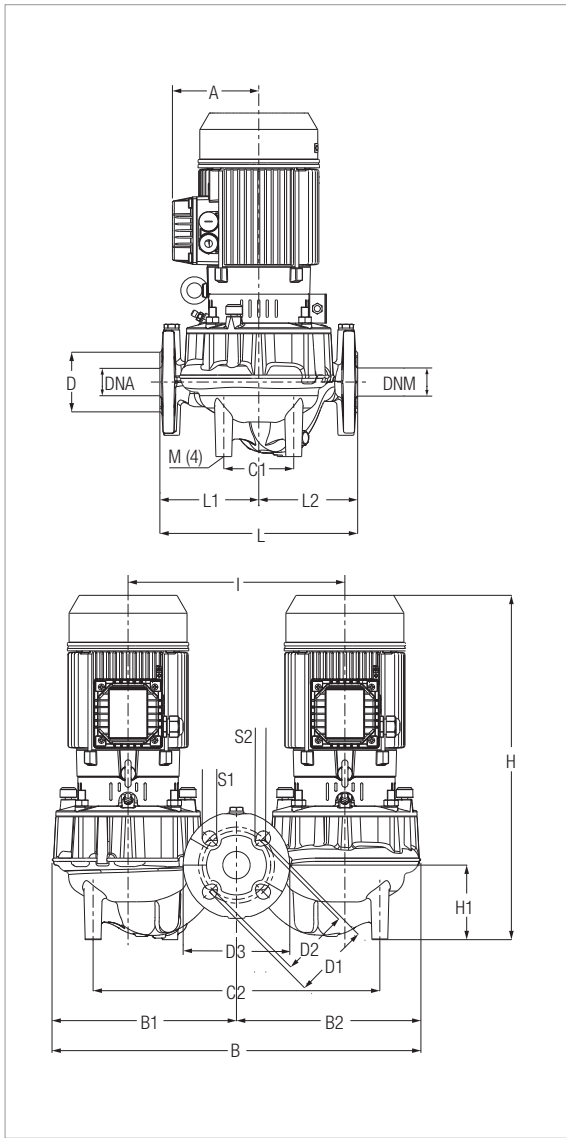

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA					
			POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
DCP2 50-600 T	280	DN 50 PN 16 DN 50 PN 10	230-400V	0,52	0,55	0,75	2,1	1,2
DCP2 50-800 T				0,79	0,55	0,75	2,6	1,5
DCP2 50-1100 T				1,29	0,8	1,07	3,8	2,2
DCP2 50-1400 T				1,95	1,5	2	6,6	3,8
DCP2 50-1800 T				2,6	2,2	3	8,3	4,8
DCP2 50-2100 T				3,6	3	4	11,3	6,5
DCP2 50-2800 T	340			4,5	7,5	10	14	8,1

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																						L/A	L/B	H		
DCP2 50-600 T	110	530	261	270	92	392	90	125	23,3	110	18	165	50	50	415	73	300	280	133	147	10	0,72	0,6	0,58	0,25	58,2
DCP2 50-800 T	110	530	261	270	92	392	90	125	23,3	110	18	165	50	50	415	73	300	280	133	147	10	0,72	0,6	0,58	0,25	58,2
DCP2 50-1100 T	110	530	261	270	92	392	90	125	23,3	110	18	165	50	50	415	73	300	280	133	147	10	0,72	0,6	0,58	0,25	58,2
DCP2 50-1400 T	118	530	261	270	92	392	90	125	23,3	110	18	165	50	50	497	73	300	280	133	147	10	0,72	0,6	0,58	0,25	75,6
DCP2 50-1800 T	118	530	261	270	92	392	90	125	23,3	110	18	165	50	50	497	73	300	280	133	147	10	0,72	0,6	0,58	0,25	75,6
DCP2 50-2100 T	134,5	530	261	270	92	392	90	125	23,3	110	18	165	50	50	486,5	73	300	280	133	147	10	0,72	0,6	0,58	0,25	94,2
DCP2 50-2800 T	134,5	631	313	319	113	463	100	125	21,8	110	14	165	50	50	560	105	350	340	190	150	10	0,72	0,6	0,58	0,25	107



DCP2-G - IN-LINE PUMPS

Liquid temperature range: from -15°C to +140°C - Maximum operating pressure: 16 bar (1600 kPa)

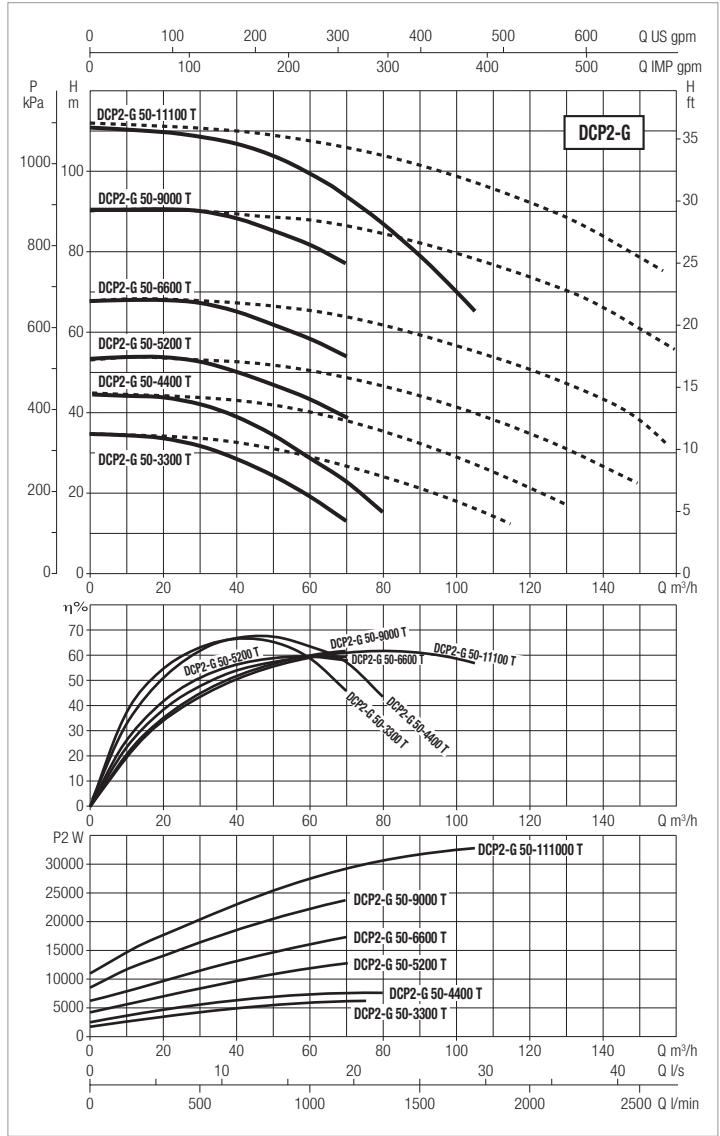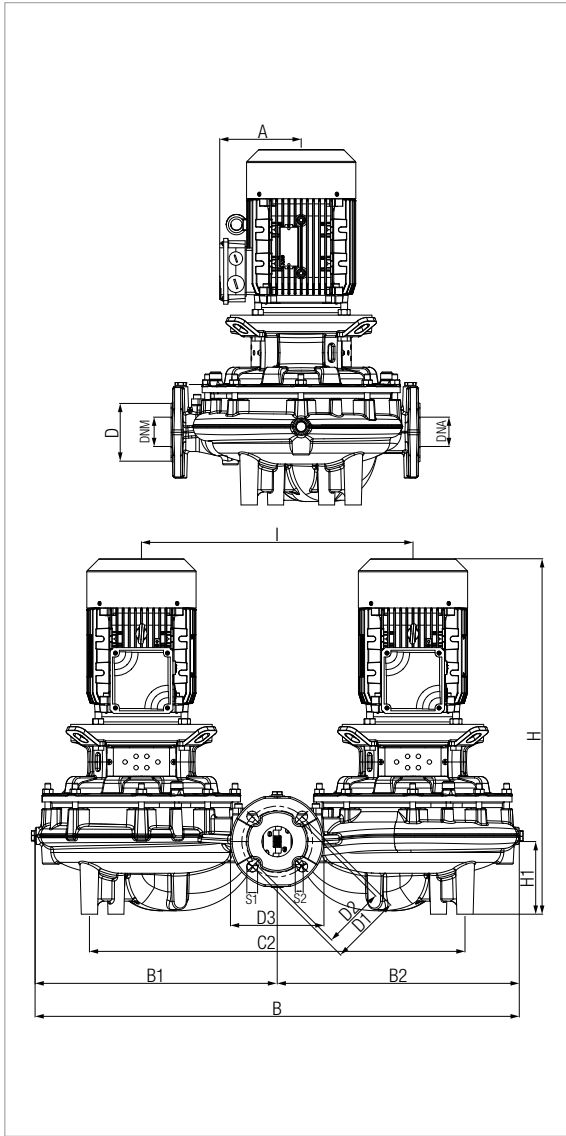

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA					
			POWER INPUT 50 HZ	P1 MAX [kW]	P2 NOMINAL		In [A]	
					kW	HP	230	400
DCP2-G 50-3300 T	340	DN 50 PN 16 DN 50 PN 10	400-690V	5.9	5.5	7.5	9.9	5.7
DCP2-G 50-4400 T				8.2	7.5	11	13.9	8.11
DCP2-G 50-5200 T	440			16.3	11	15	26.2	15.1
DCP2-G 50-6600 T				23	15	20	36.8	21.2
DCP2-G 50-9000 T				32.3	22	30	52.8	30.5
DCP2-G 50-11100 T				36.3	30	40	61.1	35.3

MODEL	A	B	B1	B2	C1	C2	D	D1	S1	D2	S2	D3	DNA	DNM	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																						L/A	L/B	H		
DCP2-G 50-3300 T	202	631	313	319	113	463	100	125	21,8	110	14	165	50	50	721,5	105	350	340	190	150	10	0,65	0,35	0,71	0,16	195,8
DCP2-G 50-4400 T	202	631	313	319	113	463	100	125	21,8	110	14	165	50	50	721,5	105	350	340	190	150	10	0,65	0,35	0,71	0,16	195,8
DCP2-G 50-5200 T	194,5	869	435	435	184	664	100	125	21,8	110	14	165	50	50	866	128,4	480	440	230	210	10	0,87	0,44	0,87	0,33	308
DCP2-G 50-6600 T	194,5	869	435	435	184	664	100	125	21,8	110	14	165	50	50	866	128,4	480	440	230	210	10	0,87	0,44	0,87	0,33	308
DCP2-G 50-9000 T	261	869	435	435	184	664	100	125	21,8	110	14	165	50	50	967	128,4	480	440	230	210	10	0,87	0,47	0,97	0,40	556,4
DCP2-G 50-11100 T	296	869	435	435	184	664	100	125	21,8	110	14	165	50	50	1027	128,4	480	440	230	210	10	0,88	0,51	1,03	0,46	612,8

CM, CM-G / DCM, DCM-G

IN-LINE PUMPS



TECHNICAL DATA

Operating range: from 4,2 m³/h to 420 m³/h

Head: 41m

Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, non-crystallised and chemically neutral, with properties similar to water.

Glycol percentage: 30%

Liquid temperature (range): from -10°C to +140°C

Maximum ambient temperature: +40 °C

Maximum operating pressure: 16 bar / 1600 kPa

Flanging or threading: flanging: DN 65, 80, 100, 125, 150 with PN 10, 16

Motor protection class: IP 55

Motor insulation class: class F

Impeller material: Cast iron or technopolymer impeller depending on model

Single phase power input: contact sales network

Three phase power input: 3x230 V 50 Hz / 3x400 V 50 Hz

Type of installation: Fixed in horizontal or vertical position with motor in up position. Only in vertical position for motor from 7,5 kW.

Special executions on request: contact sales network

CM, CM-G / DCM, DCM-G are in-line pumps designed for recirculation of water in civil and commercial applications in air-conditioning and heating systems, also in the presence of solar collectors, and for circulation of domestic hot water. The letter D indicates twin versions.

CONSTRUCTION FEATURES OF THE PUMP

Flanged suction and delivery ports with threaded connectors for control gauges. Cast iron pump casing and motor support. Stainless steel motor shaft. Cast iron or technopolymer impeller depending on model.


CONSTRUCTION FEATURES OF THE MOTOR

Three-phase four-pole asynchronous air-cooled motor.

MATERIALS

N.	PARTS*	MATERIALS
1	PUMP BODY	CAST IRON 250 UNI ISO 185
3	SUPPORT	CAST IRON 250 UNI ISO 185
4	IMPELLER	CAST IRON
7	SHAFT WITH ROTOR	AISI 304 STAINLESS STEEL X5 CrNiS 1809 UNI 6900/71
16	MECHANICAL SEAL	CARBON/GRAPHITE
28	OR RING	EPDM RUBBER


* In contact with the liquid

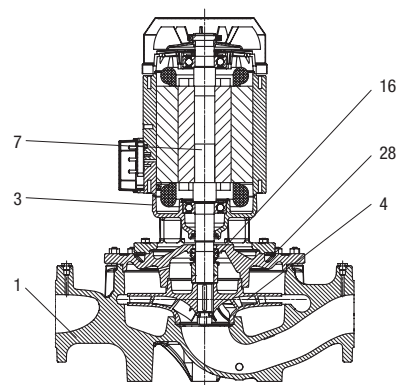



CM, CM-G / DCM, DCM-G

IN-LINE PUMPS

- Denominations:
(example)

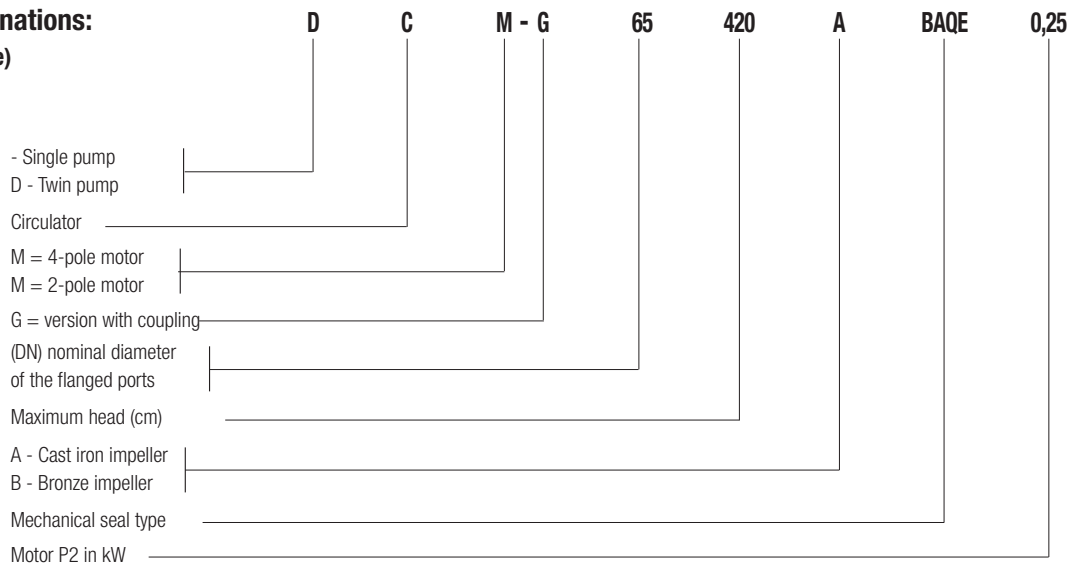

Installation: horizontal or vertical position, provided that the motor is always above the pump.
Vertical installation only for powers exceeding 7,5 kW.

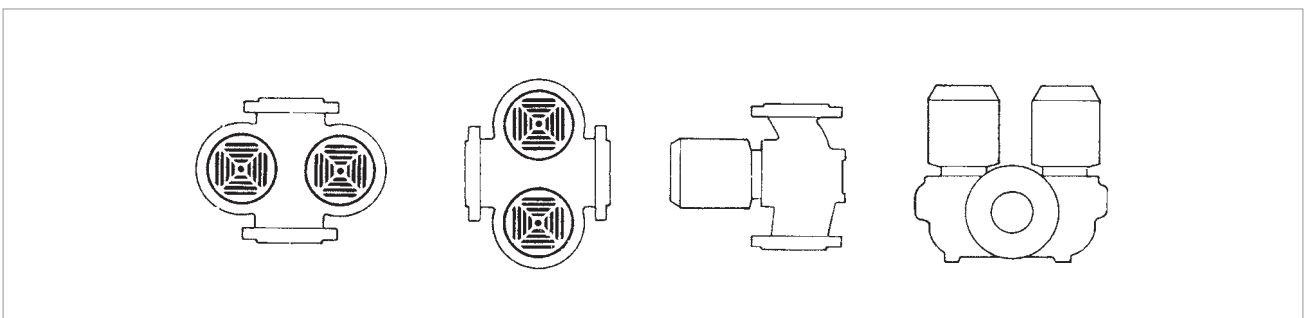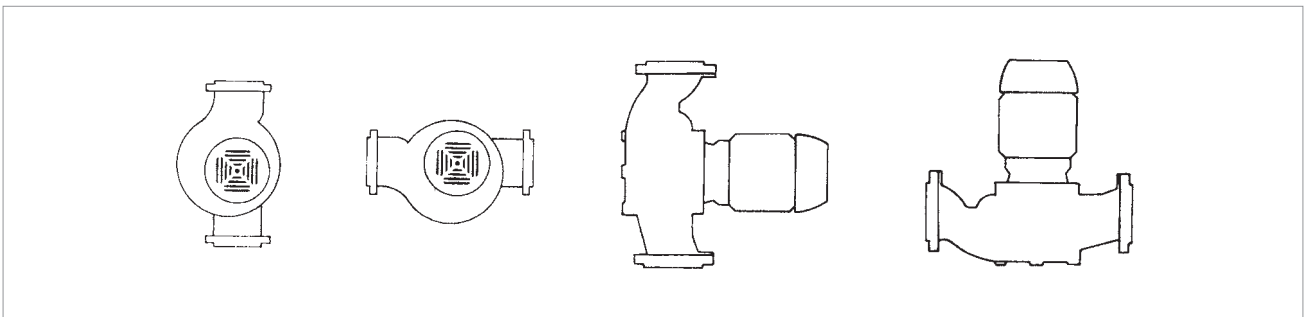


IN-LINE PUMPS

FOR CIRCULATION SYSTEMS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

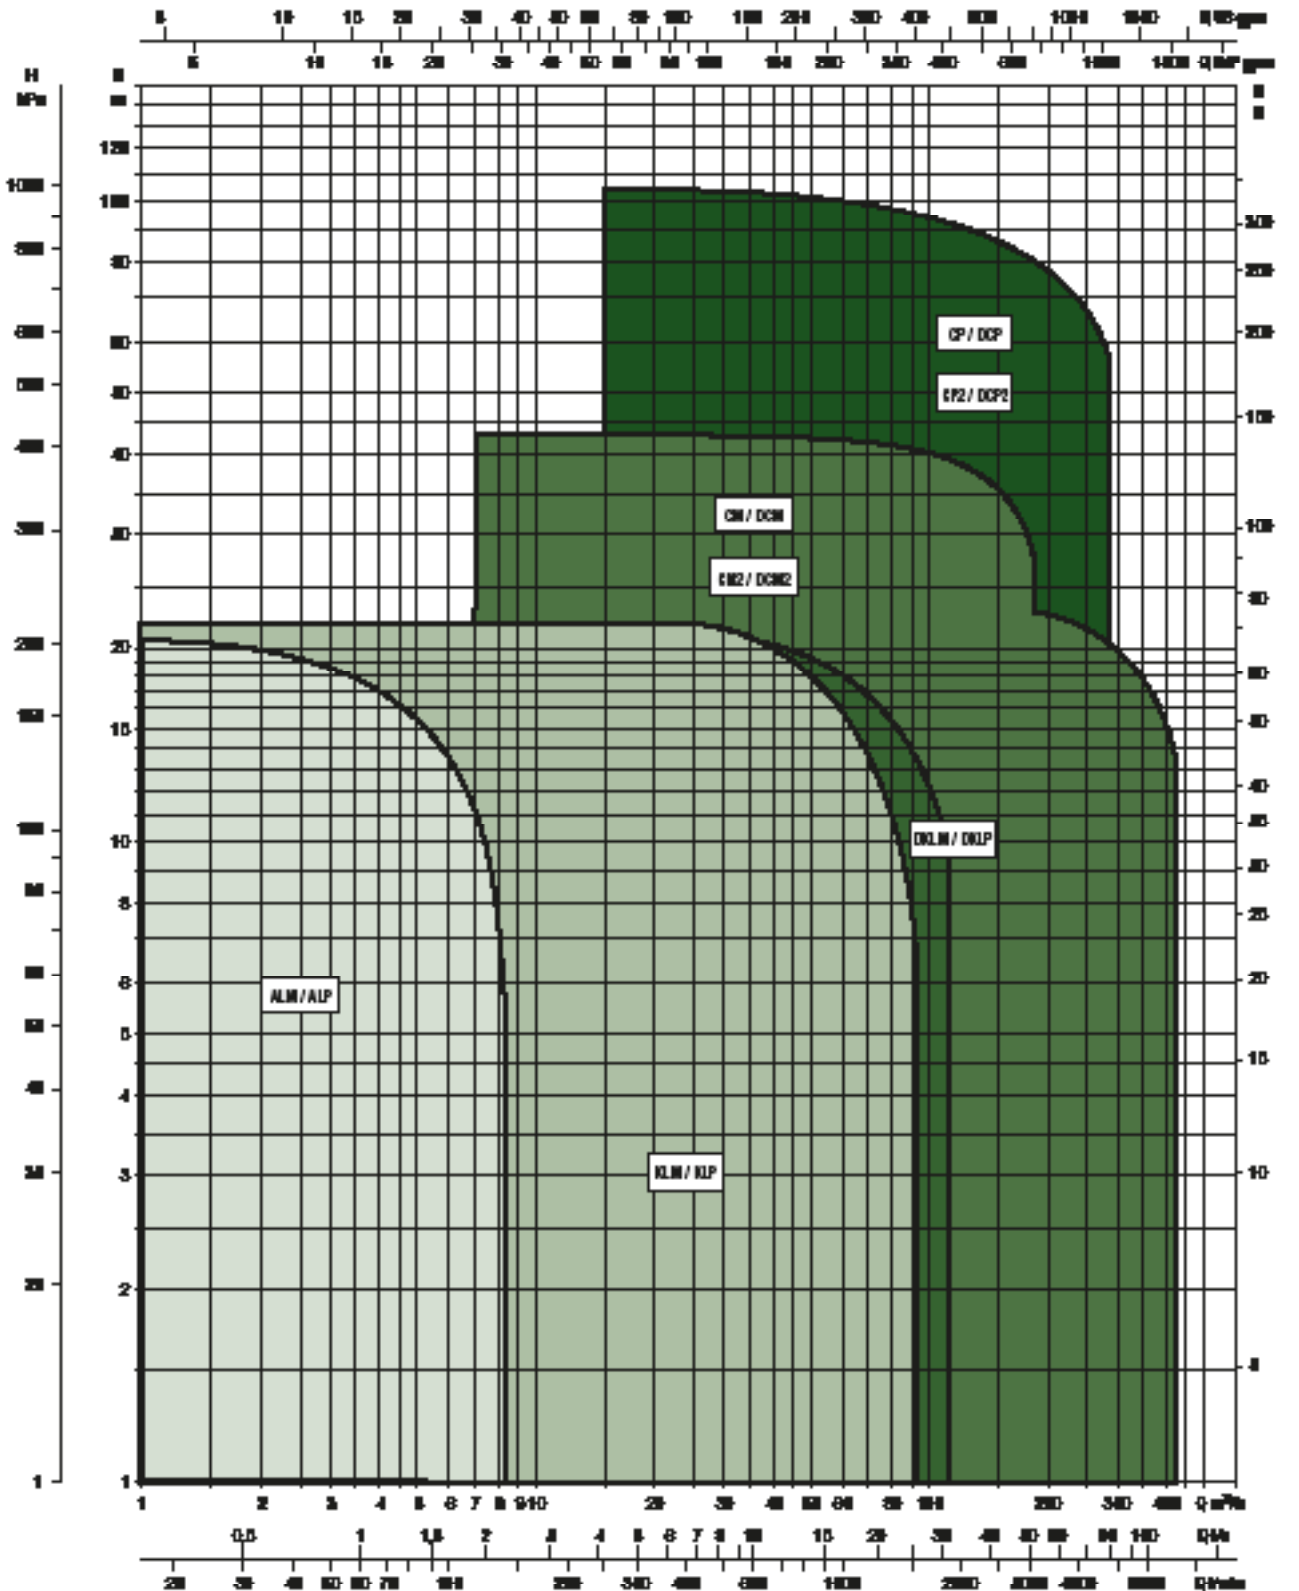

CM, CM-G / DCM, DCM-G

IN-LINE PUMPS

SELECTION TABLE - CM / CM-G - 4 POLES

MODEL	Q=m ³ h	0	1,2	2,4	3	3,6	4,8	6	12	18	24	30	36	42	48		
	Q=l/min	0	20	40	50	60	80	100	200	300	400	500	600	700	800		
CM-G 65-420/A/BAQE/0,25	H (m)	4,2						4,1	3,7	3	2,1						
CM-G 65-540/A/BAQE/0,37		5,4							5,3	5	4,4	3,5					
CM-G 65-660/A/BAQE/0,55		6,6							6,5	6,2	5,7	4,8					
CM-G 65-760/A/BAQE/0,55		7,6							7,7	7,6	6,7	5,5					
CM-G 65-920/A/BAQE/0,75		9,2							9,2	9	8,4	7,4	5,7				
CM-G 65-1080/A/BAQE/1,1		10,8								10,8	10,6	10,2	9,5	8,6	7,3		
CM-G 65-1200/A/BAQE/1,5		12								12	11,9	11,5	10,8	10,1	8,9		
CM-G 65-1530/A/BAQE/2,2		15,3								15,3	15,2	14,8	14	13,3	12,1	10,8	
CM-G 65-1680/A/BAQE/3		16,8								16,8	16,5	16,1	15,5	14,6	13,6	12,4	
CM-G 65-2380/A/BAQE/4		23,8								24	23,8	23,4	22,7	21,6	20,4	19	

MODEL	Q=m ³ h	0	12	18	24	30	36	42	48	60	72	84	90	102	114	120	150	180		
	Q=l/min	0	200	300	400	500	600	700	800	1000	1200	1400	1500	1700	1900	2000	2500	3000		
CM-G 80-550/A/BAQE/0,55	H (m)	5,5	5,2	5	4,7	4,3	3,9	3,3	2,6											
CM-G 80-650/A/BAQE/0,75		6,5	6,3	6,1	5,8	5,5	5	4,5	3,9											
CM-G 80-740/A/BAQE/1,1		7,4	7,4	7,3	7,2	6,9	6,7	6,3	5,8	4,4										
CM-G 80-890/A/BAQE/1,5		8,9		8,8	8,7	8,6	8,3	8	7,6	6,6										
CM-G 80-1050/A/BAQE/2,2		10,5			10,4	10,3	10,2	9,9	9,6	8,8										
CM-G 80-1530/A/BAQE/3		15,3			15,4	15,3	15	14,6	14,1	12,9	11,3									
CM-G 80-1700/A/BAQE/4		17			17,2	17,2	17,1	16,8	16,5	15,7	14,3	12,6								
CM-G 80-2410/A/BAQE/5,5		24,1			23,8	23,6	23,3	22,8	22,3	20,8	18,6									
CM-G 80-2700/A/BAQE/7,5		27						26	25,5	24,5	22,7	20,2	19							
CM-G 80-3420/A/BAQE/11		34,2						33,2	33	32	30,7	29	28	25	21,7					

CM, CM-G / DCM, DCM-G

IN-LINE PUMPS

SELECTION TABLE - CM / CM-G - 4 POLES

MODEL	Q=m ³ h	0	12	18	24	30	36	42	48	60	72	84	90	102	114	120	150	180	
	Q=l/min	0	200	300	400	500	600	700	800	1000	1200	1400	1500	1700	1900	2000	2500	3000	
CM-G 100-510/ A/BAQE/0,75	H (m)	5,1	4,9	4,8	4,7	4,7	4,4	4,2	3,8	3									
CM-G 100-650/A/BAQE/1,1		6,5	6,4	6,4	6,3	6,2	6	5,8	5,5	4,6									
CM-G 100-660/A/BAQE/1,5		6,6				6,4	6,3	6,2	6	5,6	5	4,5	4,3	3,7	3				
CM-G 100-865/A/BAQE/2,2		8,6				8,5	8,5	8,3	8,2	7,7	7,2	6,7	6,3	5,7	4,9	4,6			
CM-G 100-1020/A/BAQE/3		10,2				10,2	10,1	10	9,9	9,7	9,3	8,8	8,6	7,9	7,2	6,7			
CM-G 100-1320/A/BAQE/4		13,2							13,2	13,2	12,9	12,4	11,7	11,3	10,4	9,3	8,7		
CM-G 100-1650/ A/BAQE/5,5		16,5							16,6	16,5	16,2	16	15,4	15	14,3	13,3	12,7		
CM-G 100-2050/ A/BAQE/7,5		20,5							21	21	20,7	20	19,5	19	18	16,7	16		
CM-G 100-2550/A/BAQE/11		25,5							25,5	25,5	25,1	25	24,2	24	23	21,5	21		
CM-G 100-3290/A/BAQE/15		32,9									33	32,8	32	31,6	30,5	29,5	28,9	24	
CM-G 100-3680/ A/BAQE/18,5		36,8									37	36,8	36,5	36,1	35,5	34,5	34	29,5	
CM-G 100-4100/A/BAQE/22		41									41,4	41	40,6	40,5	39,8	39	38,5	34,8	29

MODEL	Q=m ³ h	0	60	72	84	90	102	114	120	150	180	210
	Q=l/min	0	1000	1200	1400	1500	1700	1900	2000	2500	3000	3500
CM-G 125-1075/A/BAQE/4	H (m)	10,8	10,1	10	9,7	9,5	9,1	8,5	8,3	7	5,4	
CM-G 125-1270/ A/BAQE/5,5		12,7	12,6	12,5	12,4	12,3	12	11,5	11,4	10,1	8,5	
CM-G 125-1560/ A/BAQE/7,5		15,6	15,4	15,3	15,1	15	14,7	14,5	14,3	13,3	11,6	9,8
CM-G 125-2100/ A/BAQE/11		21	21,5	21,5	21,2	21	20,9	20	19,8	18	16	
CM-G 125-2550/ A/BAQE/15		25,5	25,5	25,5	25,1	25,1	25	24,5	24	22,5	20,5	17,5
CM-G 125-3200/ A/BAQE/18,5		32			31,5	31,4	31	30,5	28,8	26	23	
CM-G 125-3600/ A/BAQE/22		36			35,5	35,2	35	34,6	33,2	31	28	24
CM-G 125-4022/ A/BAQE/30		40,2			39,7	39,3	39,1	38,7	37,1	34,6	31,3	26,8

MODEL	Q=m ³ h	0	84	90	102	114	120	150	180	210	250	300	360	390	420
	Q=l/min	0	1400	1500	1700	1900	2000	2500	3000	3500	4167	5000	6000	6500	7000
CM-G 150-955/A/BAQE/5,5	H (m)	9,6		9,6	9,6	9,4	9,3	8,7	7,8	6,7	5,5				
CM-G 150-1322/A/BAQE/7,5		13,2		13	12,8	12,6	12,5	11,9	11,1	10,1	8,5				
CM-G 150-1600/A/BAQE/11		16			15,5	15,5	15,4	14,8	14	13	11	9,2			
CM-G 150-1950/A/BAQE/15		19,5			19,5	19,4	19,3	19,2	18,7	17,8	16	14,1	10,9		
CM-G 150-2200/A/BAQE/18,5		22			22	21,9	21,8	21,7	21,4	20,5	19	17,2	14	12	
CM-G 150-2405/A/BAQE/22		24,1			23,9	23,9	23,8	23,6	23,2	22,7	21,8	20,2	17,5	15,6	14

CM, CM-G / DCM, DCM-G

IN-LINE PUMPS

SELECTION TABLE - DCM / DCM-G - 4 POLES

MODEL	Q=m ³ h	0	6	12	18	24	30	36	42	48	54
	Q=l/min	0	100	200	300	400	500	600	700	800	900
DCM-G 65-420/A/BAQE/0,25	H (m)	4,2	3,5	2,7	1,7	0,5					
DCM-G 65-540/A/BAQE/0,37		5,4	5,2	4,4	3,3	1,6					
DCM-G 65-660/A/BAQE/0,55		6,5	6,4	5,6	4,4	2,6					
DCM-G 65-760/A/BAQE/0,55		7,5	7,6	6,9	5,4	3,1					
DCM-G 65-920/A/BAQE/0,75		9,1	9,1	8,6	7,5	5,8	3,8				
DCM-G 65-1080/A/BAQE/1,1		10,8		10,7	10,4	9,7	8,8	7,7	6,2		
DCM-G 65-1200/A/BAQE/1,5		12		11,9	11,6	11	10	9	7,6		
DCM-G 65-1530/A/BAQE/2,2		15,3		15,2	15	14,4	13,4	12,5	11	9,5	8
DCM-G 65-1680/A/BAQE/3		16,8		16,7	16,3	15,7	14,9	13,7	12,4	11	9,3
DCM-G 65-2380/A/BAQE/4		23,8		23,9	23,5	22,8	21,8	20,3	18,6	16,8	14,5

MODEL	Q=m ³ h	0	12	18	24	30	36	42	48	54	60	66	72	78	84	90	102	114
	Q=l/min	0	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1700	1900
DCM-G 80-550/A/BAQE/0,55	H (m)	5,5	5,1	4,7	4,1	3,4	2,6	1,9	1,1									
DCM-G 80-650/A/BAQE/0,75		6,5	6,2	5,8	5,2	4,5	3,7	2,9	2,1									
DCM-G 80-740/A/BAQE/1,1		7,1			6,8	6,3	5,9	5,1	4,3	3,5	2,5							
DCM-G 80-890/A/BAQE/1,5		8,5			8,3	8,0	7,5	6,8	6,1	5,3	4,4	3,5						
DCM-G 80-1050/A/BAQE/2,2		10,1			10,1	9,9	9,5	9,0	8,4	7,7	6,9			3,8				
DCM-G 80-1530/A/BAQE/3		14,4			14,1	13,7	13,0	12,2	11,3	10,2	9,2	8,0	6,8					
DCM-G 80-1700/A/BAQE/4		16,0			15,7	15,5	15,3	14,6	14,0	13,2	12,3	11,2	10,0	8,9	7,7			
DCM-G 80-2410/A/BAQE/5,5		24,1					23,3	22,7	22,0	21,1	20,2	18,9	17,6	16,2				
DCM-G 80-2700/A/BAQE/7,5		27,0					26,1	26,1	25,5	24,9	24,2	23,2	22,1	20,7	19,3	17,9		
DCM-G 80-3420/A/BAQE/11		34,2					33,3	33,3	32,9	32,3	31,8	30,9	29,9	29,0	27,8	24,4	22,0	20,8

CM, CM-G / DCM, DCM-G

IN-LINE PUMPS

SELECTION TABLE - DCM-G - 4 POLES



MODEL	Q=m ³ h	0	12	18	24	30	36	42	48	54	60	66	72	78	84	90	102	114	120	150	180	
	Q=l/min	0	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1700	1900	2000	2500	3000	
DCM-G 100-510/A/BAQE/0,75	H (m)	4,9	4,8	4,7	4,6	4,5	4	3,7	3,2	2,6	2,1											
DCM-G 100-650/A/BAQE/1,1		6,3	6,3	6,3	6,1	5,9	5,5	5,1	4,6	4	3,3											
DCM-G 100-660/A/BAQE/1,5		6,6				6,4	6,2	6	5,8	5,6	5,3	4,9	4,5	4,1	3,7	3,4	2,6	1,8				
DCM-G 100-865/A/BAQE/2,2		8,6				8,5	8,4	8,1	8	7,7	7,4	7	6,6	6,1	5,7	5,2	4,2	3,2	2,8			
DCM-G 100-1020/A/BAQE/3		10,2				10,2	10	9,8	9,6	9,5	9,3	8,9	8,5	8	7,5	7,1	5,9	4,7	4			
DCM-G 100-1320/A/BAQE/4		13,2						13,2	13,1	13	12,8	12,4	11,9	11,3	10,8	10,2	8,8	7,4	6,6			
DCM-G 100-1650/A/BAQE/5,5		16,5						16,5	16,4	16,3	16	15,8	15,5	14,9	14,4	13,7	12,4	10,8	10			
DCM-G 100-2050/A/BAQE/7,5		19,3								19,2	18,8	18,5	17,9	17,6	17,2	16,6	15,5	14,1	13,3			
DCM-G 100-2550/A/BAQE/11		24								23,3	22,8	22,6	22,4	21,9	21,4	21	19,8	18,1	17,5			
DCM-G 100-3290/A/BAQE/15		30,9								30,5	30,3	30,1	29,9	29,4	28,8	28,3	27	25,8	25,1	20		
DCM-G 100-3680/A/BAQE/18,5		34,6								34,2	34	33,7	33,5	33,1	32,9	32,4	31,5	30,2	29,5	24,5		
DCM-G 100-4100/A/BAQE/22		41								41,4	41,4	41,2	41	40,8	40,6	40,5	39,8	39	38,5	34,8	29	

MODEL	Q=m ³ h	0	60	66	72	78	84	90	102	114	120	150	180	210	
	Q=l/min	0	1000	1100	1200	1300	1400	1500	1700	1900	2000	2500	3000	3500	
DCM-G 125-1075/A/ BAQE/4	H (m)	10	9,5	9,4	9,2	9	8,7	8,4	7,7	6,8	6,5	4,4	2,4		
DCM-G 125-1270/A/ BAQE/5,5		11,7	11,8	11,7	11,5	11,4	11,1	10,8	10,2	9,2	8,9	6,4	3,8		
DCM-G 125-1560/A/ BAQE/7,5		14,4	14,6	14,6	14,4	14,2	14	13,8	13,2	12,7	12,3	10,2	7,5	4,9	
DCM-G 125-2100/A/ BAQE/11		20,1						19,9	19,6	19,3	18,2	17,8	15,4	12,7	
DCM-G 125-2550/A/ BAQE/15		24,5						23,8	23,7	23,4	22,7	22,1	20	17,4	13,9
DCM-G 125-3200/A/ BAQE/18,5		30,7						29,6	29,3	28,6	27,7	25,9	22,2	18,3	
DCM-G 125-3600/A/ BAQE/22		34,5						33,7	33,3	32,8	32,1	30,6	27,6	23,7	19,1
DCM-G 125-4022/A/ BAQE/30		39						38,9	38,5	37,6	36,6	36,1	33,2	29,5	24,7

MODEL	Q=m ³ h	0	90	102	114	120	150	180	210	240	250	270	330	360	390	420
	Q=l/min	0	1500	1700	1900	2000	2500	3000	3500	4000	4167	4500	5500	6000	6500	7000
DCM-G 150-955/A/BAQE/5,5	H (m)	9,6				8,1	7	6,2	4,9	3,5	2,8					
DCM-G 150-1322/A/BAQE/7,5		11,8	11,5	11,5	11,4	11	10	8,5	7,2	6	5,5					
DCM-G 150-1600/A/BAQE/11		14,8		14,2	14,2	14	13,4	12,5	11,4	10,1	9,4	8,8	7,5			
DCM-G 150-1950/A/BAQE/15		18,1		17,9	17,8	17,7	17,5	16,9	15,9	14,8	14	13,5	12	10,5	8,9	
DCM-G 150-2200/A/BAQE/18,5		20,2		20,7	20,6	20,4	20,2	19,7	18,5	17,3	16,6	15	14,2	12,2	10,5	8,5
DCM-G 150-2405/A/BAQE/22		22,5		22,2	22	21,9	21,4	21	20	19	18,5	17,8	16	14	12	9,7

CM-G 65 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

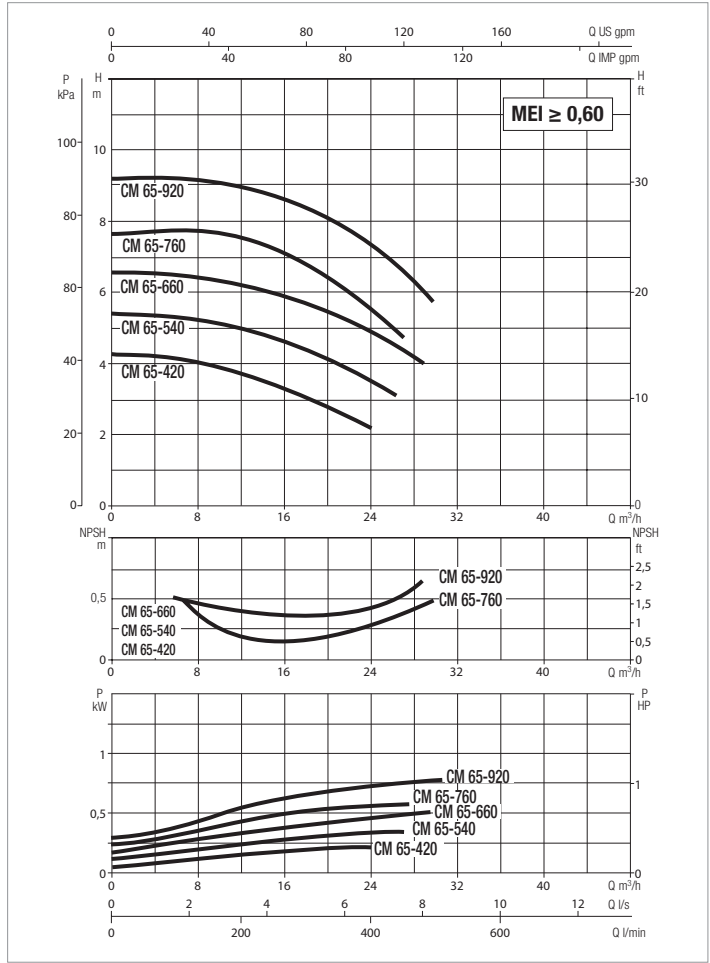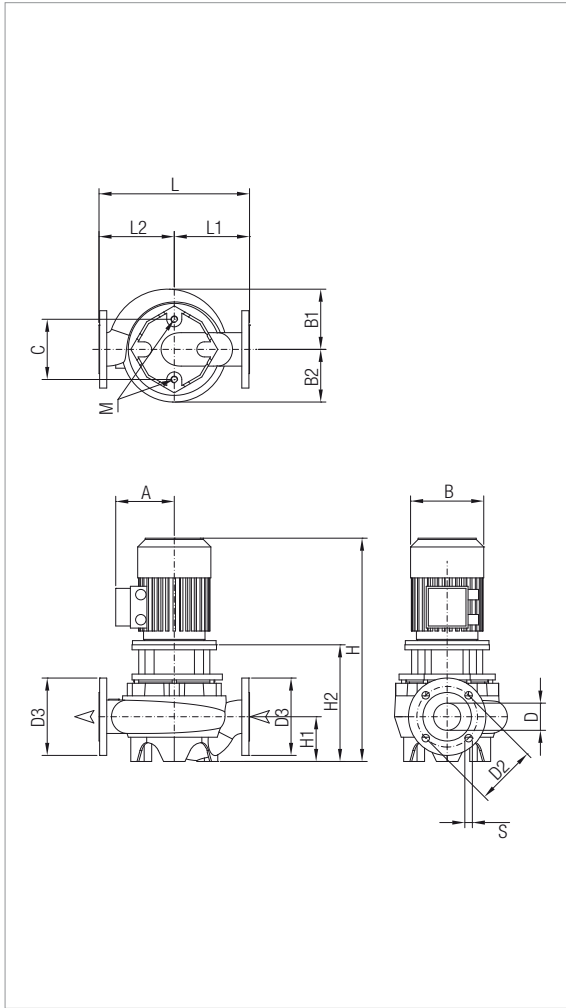



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						KW	HP	230 V	400 V			
CM-G 65-420/A/BAQE/0,25	360	DN 65	3 x 230 - 400 V ~	1400	0,4	0,25	0,33	1,6	0,9	-	MEC 71	4,6/2,6
CM-G 65-540/A/BAQE/0,37	360	DN 65	3 x 230 - 400 V ~	1380	0,6	0,37	0,5	1,7	0,98	-	MEC 71	8,1/4,6
CM-G 65-660/A/BAQE/0,55	360	DN 65	3 x 230 - 400 V ~	1400	0,8	0,55	0,75	2,6	1,5	-	MEC 80M	13,9/8
CM-G 65-760/A/BAQE/0,55	360	DN 65	3 x 230 - 400 V ~	1390	0,8	0,55	0,75	2,6	1,5	-	MEC 80M	13,9/8
CM-G 65-920/A/BAQE/0,75	360	DN 65	3 x 230 - 400 V ~	1430	1,2	0,75	1	3,12	1,8	IE3	MEC 80M	17,2/9,9

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 65-420/A/BAQE/0,25	124	144	126	144	65	145	185	18	4	479	107	254	360	180	180	M16	689	426	834	0,245	55
CM-G 65-540/A/BAQE/0,37	124	144	126	144	65	145	185	18		479	107	254	360	180	180	M16	689	426	834	0,245	55
CM-G 65-660/A/BAQE/0,55	140	144	126	144	65	145	185	18		534	107	279	360	180	180	M16	689	426	834	0,245	65
CM-G 65-760/A/BAQE/0,55	140	144	126	144	65	145	185	18		534	107	279	360	180	180	M16	689	426	834	0,245	73
CM-G 65-920/A/BAQE/0,75	129	144	126	144	65	145	185	18		511	107	279	360	180	180	M16	689	426	834	0,245	67

CM-G 65 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

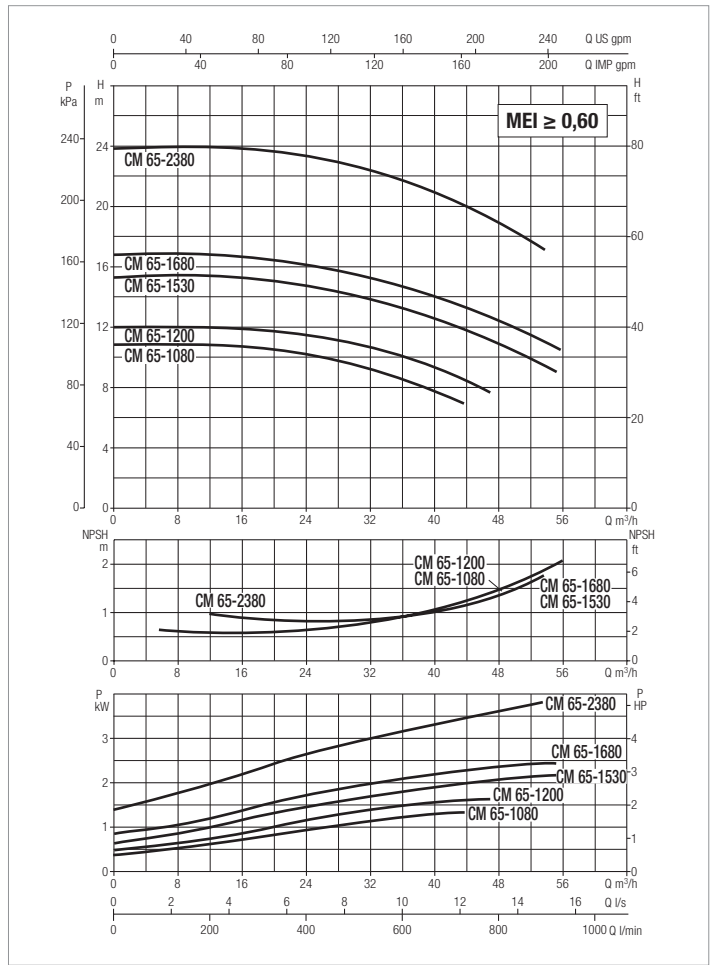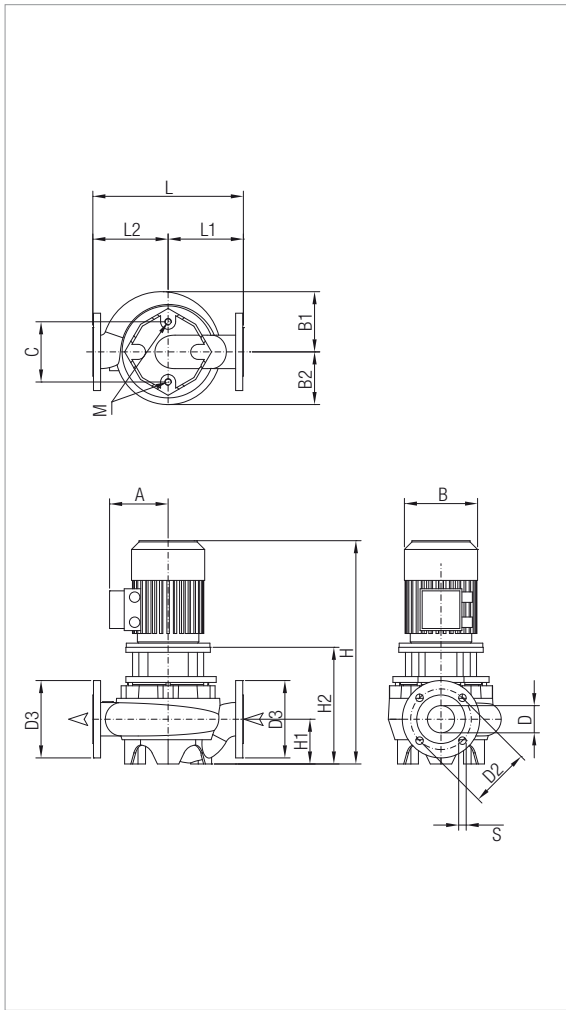

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								MOTOR TYPE	MOTOR SIZE	I st. A
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A					
CM-G 65-1080/A/BAQE/1,1	475	DN 65	3 x 230 - 400V ~	1435	1,6	1,1	1,5	4,33	2,5	IE3	MEC 90S	30,7/17,8	
CM-G 65-1200/A/BAQE/1,5	475	DN 65	3 x 230 - 400V ~	1430	2	1,5	2	6,24	3,6	IE3	MEC 90L	41,2/23,8	
CM-G 65-1530/A/BAQE/2,2	475	DN 65	3 x 230 - 400V ~	1455	2,9	2,2	3	10,22	5,9	IE3	MEC 100L	60,3/34,8	
CM-G 65-1680/A/BAQE/3	475	DN 65	3 x 400V ~ ¹	1448	2,7	3	4	-	6,8	IE3	MEC 100L	55,1	
CM-G 65-2380/A/BAQE/4	475	DN 65	3 x 400V ~ ¹	1449	4,3	4	5,5	-	8,2	IE3	MEC 112M	57,8	

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 65-1080/A/BAQE/1,1	138	180	164	144	65	145	185	18	4	557	125	291	475	237,5	237,5	M16	689	426	834	0,245	77
CM-G 65-1200/A/BAQE/1,5	138	180	164	144	65	145	185	18		597	125	291	475	237,5	237,5	M16	689	426	834	0,245	71
CM-G 65-1530/A/BAQE/2,2	145	180	164	144	65	145	185	18		623	125	319	475	237,5	237,5	M16	689	426	834	0,245	86
CM-G 65-1680/A/BAQE/3	145	180	164	144	65	145	185	18		623	125	319	475	237,5	237,5	M16	689	426	834	0,245	72
CM-G 65-2380/A/BAQE/4	161	180	164	144	65	145	185	18		717	125	319	475	237,5	237,5	M16	689	426	1084	0,318	92

CM-G 80 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

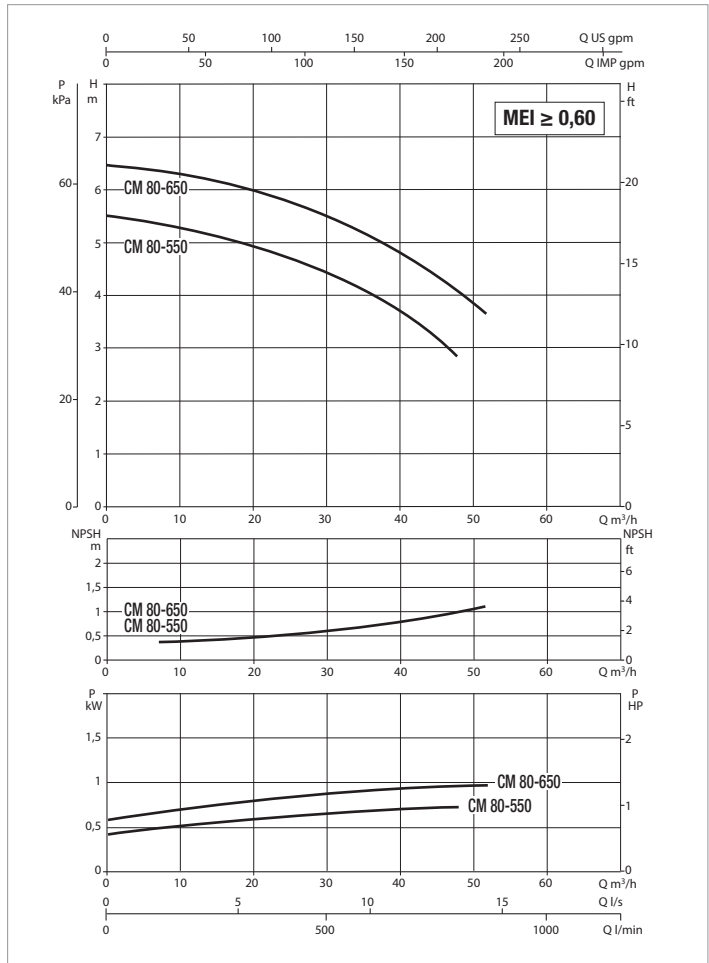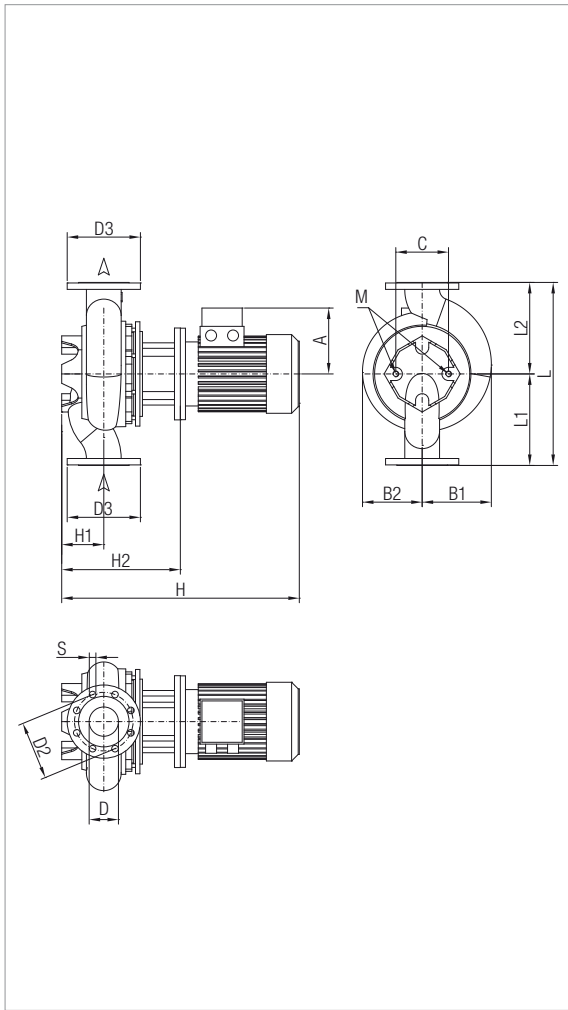



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
CM-G 80-550/A/BAQE/0,55	360	DN 80	3 x 230 - 400V ~	1390	0,8	0,55	0,75	2,6	1,5	-	MEC 80M	13,9/8
CM-G 80-650/A/BAQE/0,75	360	DN 80	3 x 230 - 400V ~	1430	1,2	0,75	1	3,12	1,8	IE3	MEC 80M	17,2/9,9

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (mc)	WEIGHT kg
																	L/A	L/B	H		
CM-G 80-550/A/BAQE/0,55	140	135	118	144	80	160	200	18	8	536	105	281	360	180	180	M16	689	426	834	0,245	67
CM-G 80-650/A/BAQE/0,75	129	135	118	144	80	160	200	18		513	105	281	360	180	180	M16	689	426	834	0,245	61

CM-G 80 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

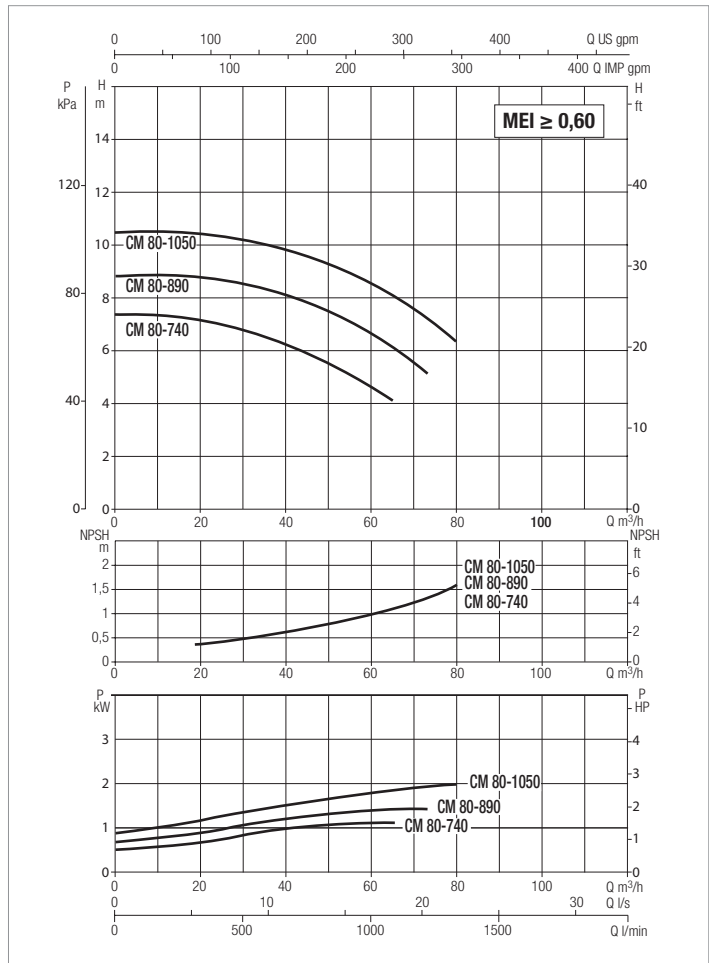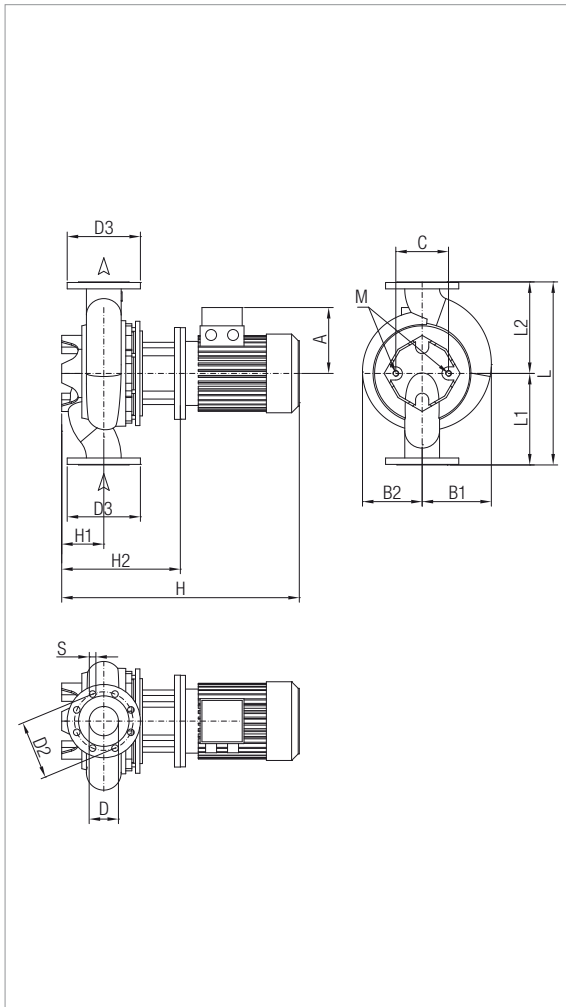



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
CM-G 80-740/A/BAQE/1,1	440	DN 80	3 x 230 - 400 V ~	1439	1,5	1,1	1,5	4,33	2,5	IE3	MEC 90S	30,7/17,8
CM-G 80-890/A/BAQE/1,5	440	DN 80	3 x 230 - 400 V ~	1430	2	1,5	2	6,24	3,6	IE3	MEC 90L	41,2/23,8
CM-G 80-1050/A/BAQE/2,2	440	DN 80	3 x 230 - 400 V ~	1450	2,4	2,2	3	10,22	5,9	IE3	MEC 100L	60,3/34,8

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
																	CM-G 80-740/A/BAQE/1,1	138	178		
CM-G 80-890/A/BAQE/1,5	138	178	145	144	80	160	200	18	8	598	115	291	440	220	220	M16	689	426	834	0,245	67
CM-G 80-1050/A/BAQE/2,2	145	178	145	144	80	160	200	18	8	623	115	319	440	220	220	M16	689	426	834	0,245	80

CM-G 80 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

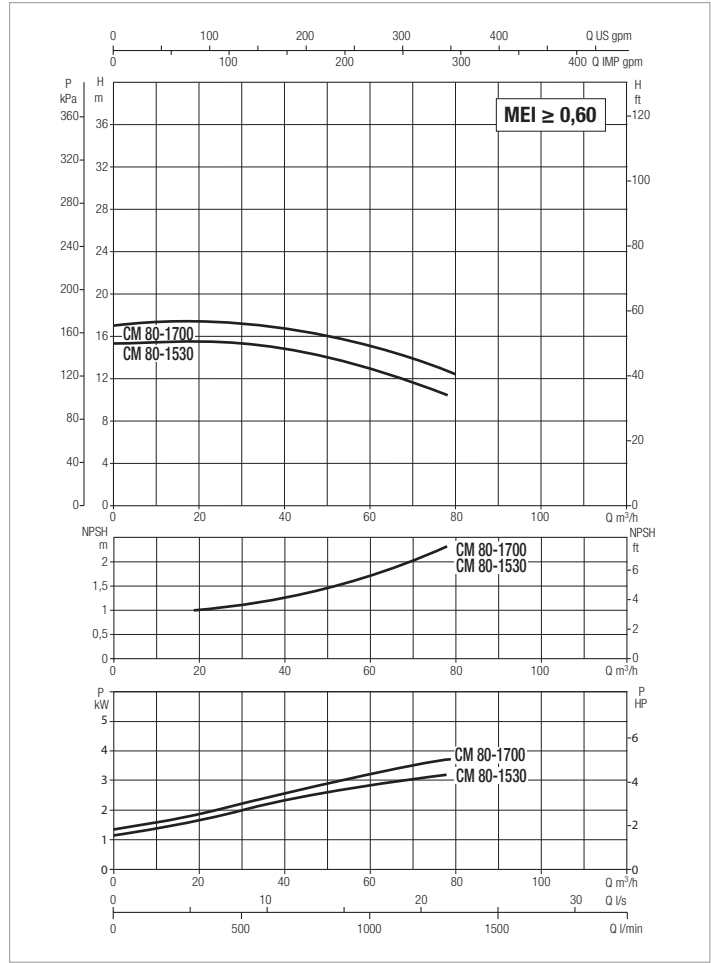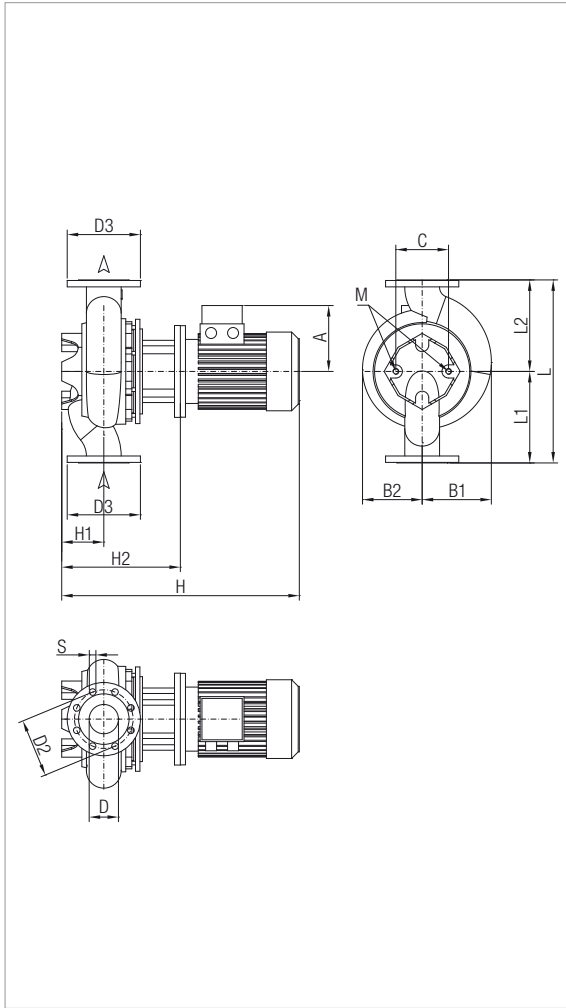

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
CM-G 80-1530/A/BAQE/3	500	DN 80	3 x 400 V ~ ¹	1441	3,6	3	4	-	6,8	IE3	MEC 100L	55,1
CM-G 80-1700/A/BAQE/4	500	DN 80	3 x 400 V ~ ¹	1452	3,9	4	5,5	-	8,2	IE3	MEC 112M	57,8

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
																	CM-G 80-1530/A/BAQE/3	145	189		
CM-G 80-1700/A/BAQE/4	161	189	164	144	80	160	200	18	717	-	729	500	250	250	M16	739	626	1107	0,512	98	

CM-G 80 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

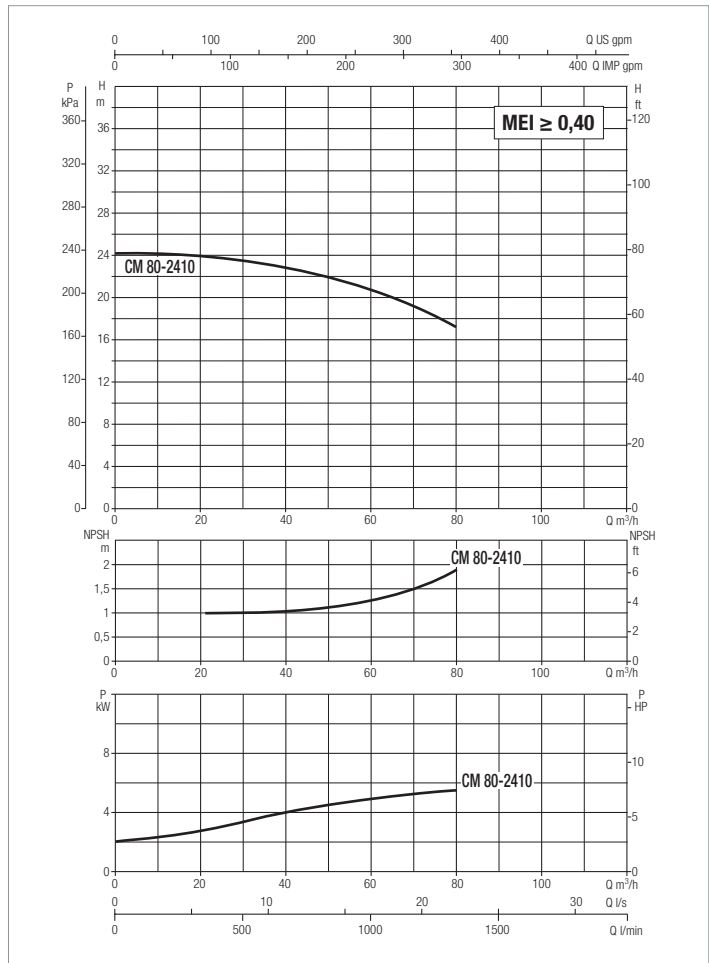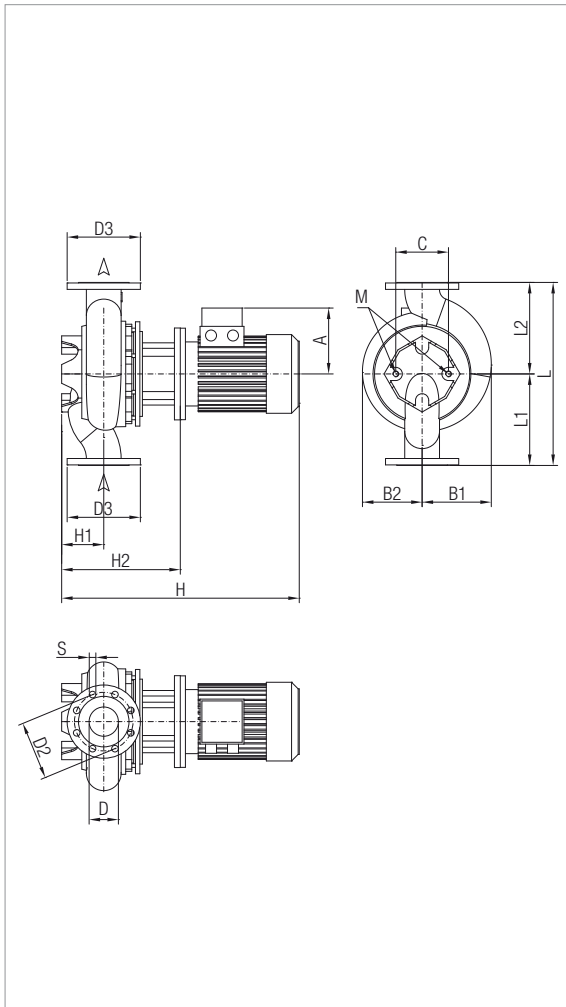

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
CM-G 80-2410/A/BAQE/5,5	620	DN 80	3 x 400 V ~ ¹	1461	6,5	5,5	7,5	10,6	IE3	MEC 132S	92,2

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 80-2410/A/BAQE/5,5	195	245	224	230	80	160	200	18	8	775	140	413	620	310	310	M16	739	626	1107	0,512	204

CM-G 80 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

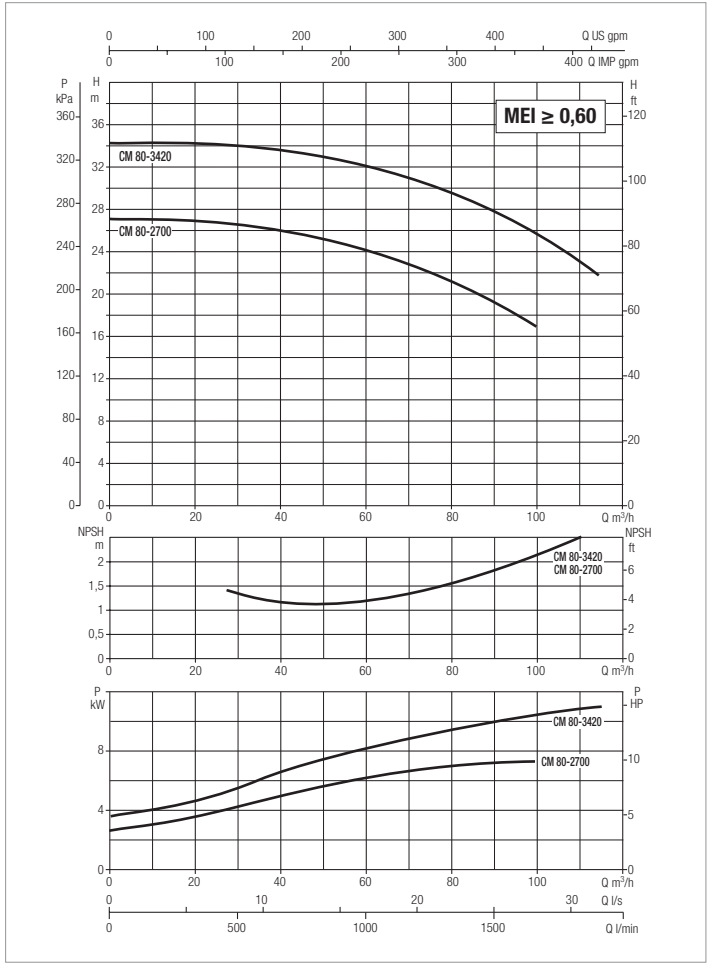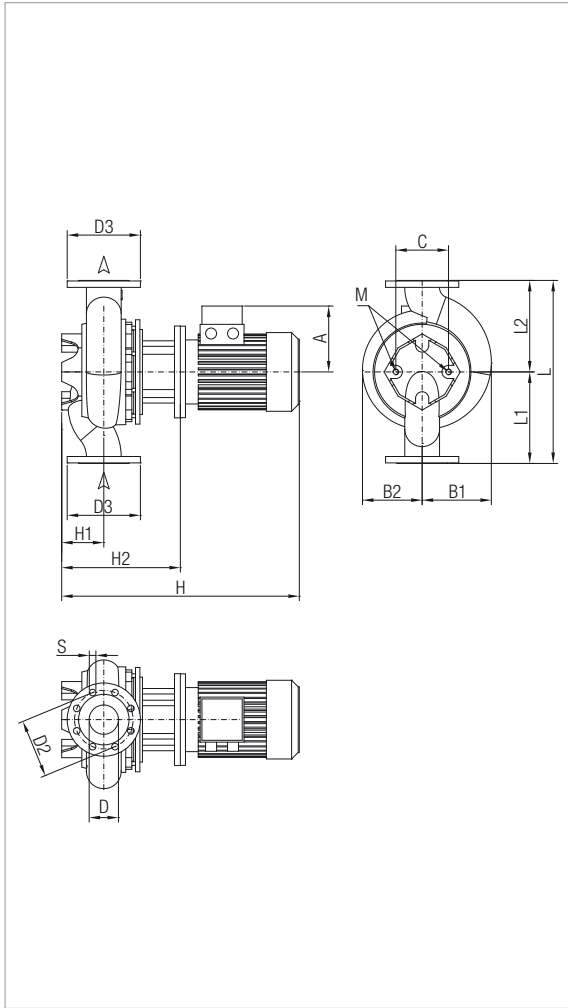

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
CM-G 80-2700/A/BAQE/7,5	620	DN 80	3 x 400 V ~ ¹	1463	8,7	7,5	10	14,4	IE3	MEC 132M	124,1
CM-G 80-3420/A/BAQE/11	620	DN 80	3 x 400 V ~ ¹	1472	12,7	11	15	22,4	IE3	MEC 160M	172,2

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 80-2700/A/BAQE/7,5	188	245	224	230	80	160	200	18	8	850	140	413	620	310	310	M16	739	626	1107	0,512	187
CM-G 80-3420/A/BAQE/11	249	245	224	230	80	160	200	18		948	140	413	620	310	310	M16	1200	720	758	0,655	277

CM-G 100 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

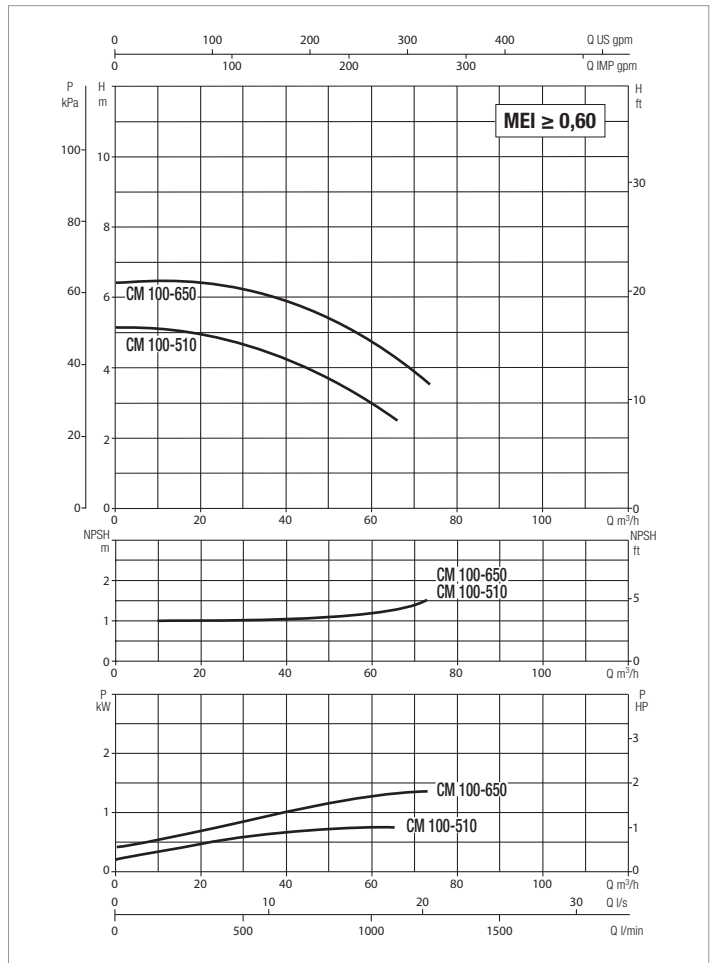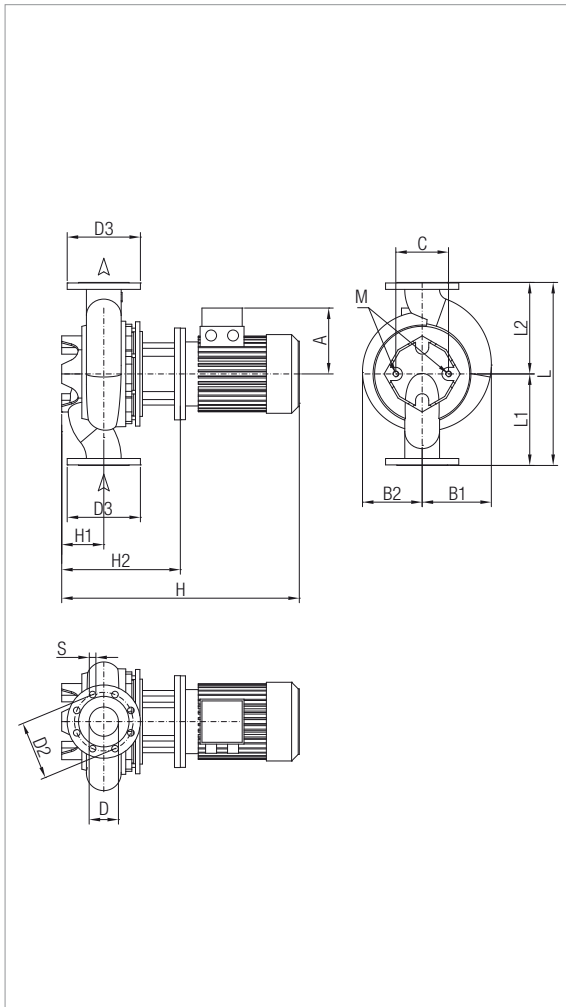



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA										
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A	
						kW	kW	HP	230 V	400 V			
CM-G 100-510/A/BAQE/0,75	500	DN 100	3x230-400V~	1430	1,2	0,75	1	3,12	1,8	IE3	MEC 80M	17,2/9,9	
CM-G 100-650/A/BAQE/1,1	500	DN 100	3x230-400V~	1440	1,4	1,1	1,5	4,33	2,5	IE3	MEC 90S	30,7/17,8	

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 100-510/A/BAQE/0,75	129	158	125	158	125	180	220	18	8	550	140	318	500	250	250	M16	689	426	834	0,245	78
CM-G 100-650/A/BAQE/1,1	138	158	125	158	125	180	220	18	8	585	140	318	500	250	250	M16	689	426	834	0,245	78

CM-G 100 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

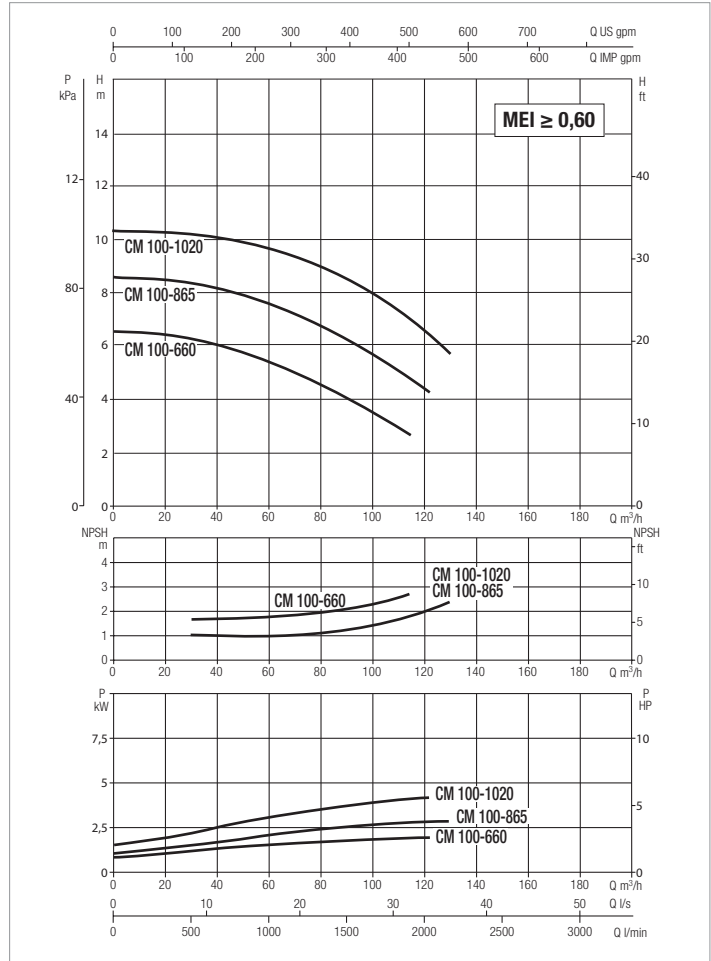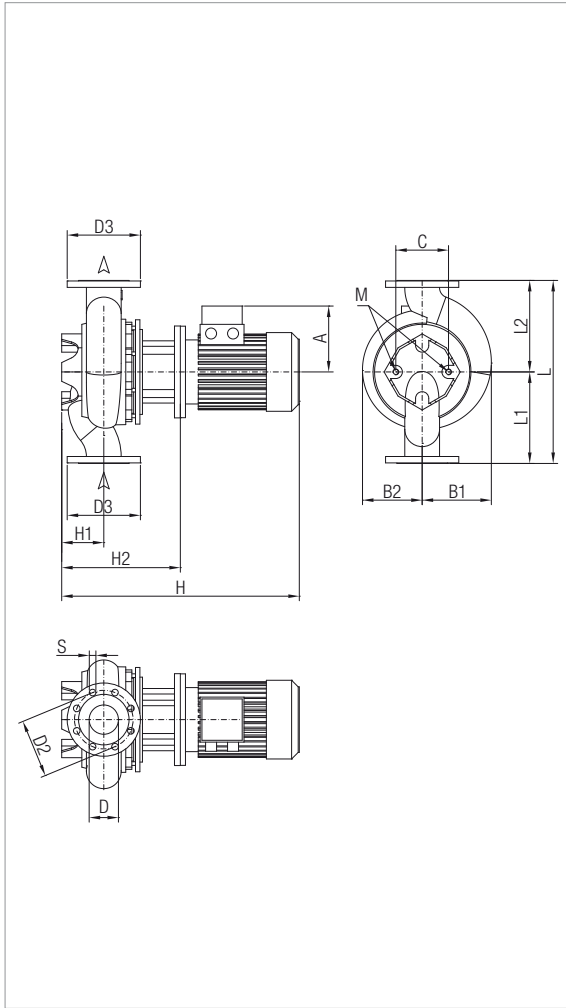

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
CM-G 100-660/A/BAQE/1,5	550	DN 100	3 x 230 - 400 V ~	1430	2	1,5	2	6,24	3,6	IE3	MEC 90L	41,2/23,8
CM-G 100-865/A/BAQE/2,2	550	DN 100	3 x 230 - 400 V ~	1455	3	2,2	3	10,22	5,9	IE3	MEC 90L	60,3/34,8
CM-G 100-1020/A/BAQE/3	550	DN 100	3 x 400 V ~ ¹	1441	3,6	3	4	-	6,8	IE3	MEC 100L	55,1

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m³)	WEIGHT Kg
																	L/A	L/B	H		
																	CM-G 100-660/A/BAQE/2,5	138	192		
CM-G 100-865/A/BAQE/2,2	145	192	152	230	100	180	220	18	8	645	140	341	550	275	275	M16	689	426	834	0,245	108
CM-G 100-1020/A/BAQE/3	145	192	152	230	100	180	220	18	8	645	140	341	550	275	275	M16	689	426	834	0,245	102

CM-G 100 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

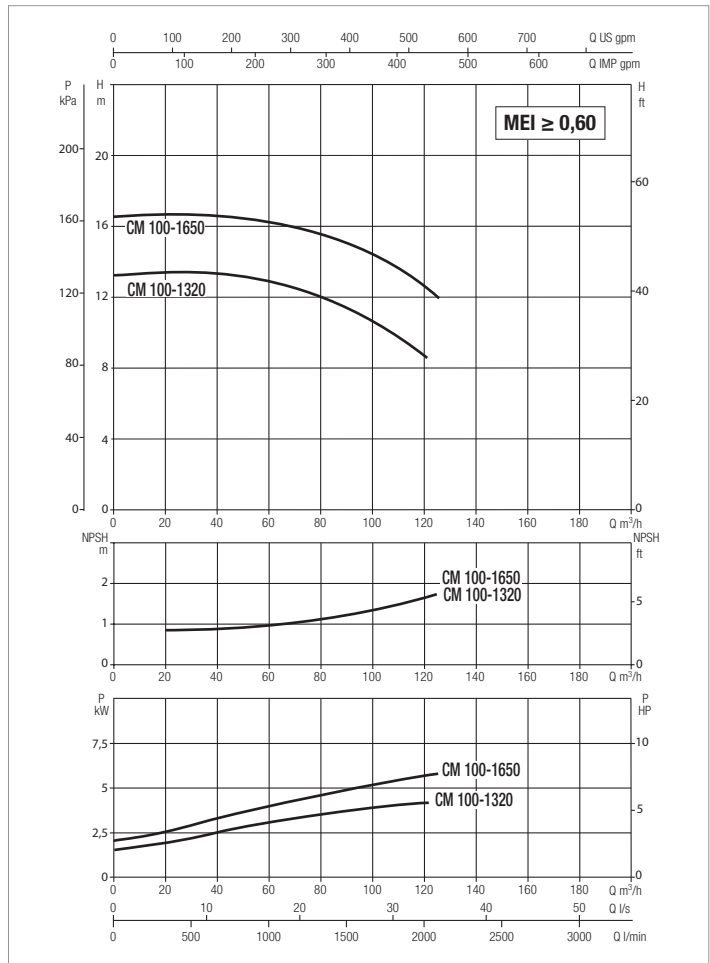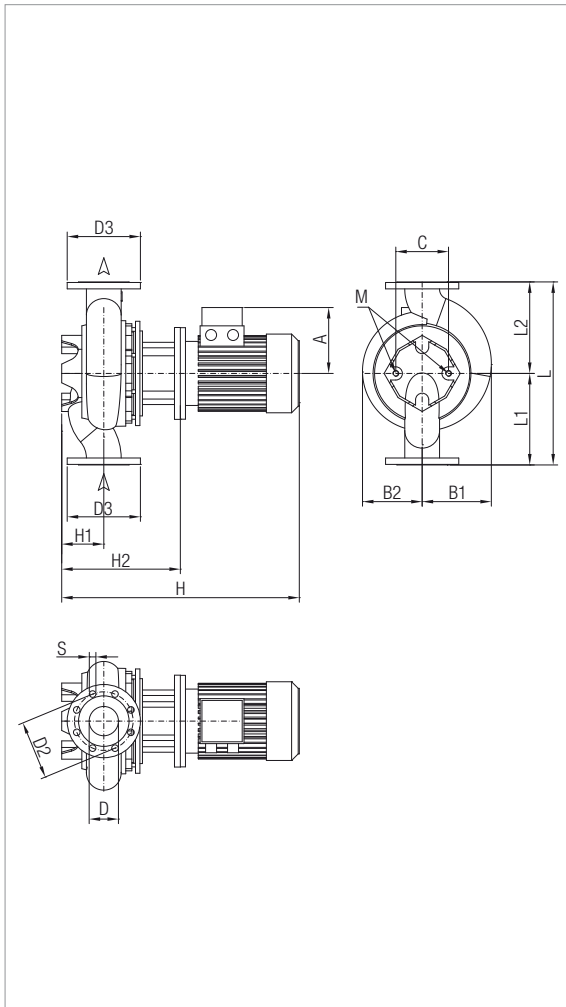

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
CM-G 100-1320/A/BAQE/4	550	DN 100	3 x 400V ~ ¹	1450	4,6	4	5,5	8,2	IE3	MEC 112M	57,8
CM-G 100-1650/A/BAQE/5,5	550	DN 100	3 x 400V ~ ¹	1464	6,9	5,5	7,5	10,6	IE3	MEC 132S	92,2

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 100-1320/A/BAQE/4	161	204	174	230	100	180	220	18	8	799	140	341	550	275	275	M16	739	626	1107	0,512	137
CM-G 100-1650/A/BAQE/5,5	195	204	174	230	100	180	220	18		779	140	417	550	275	275	M16	739	626	1107	0,512	182

CM-G 100 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

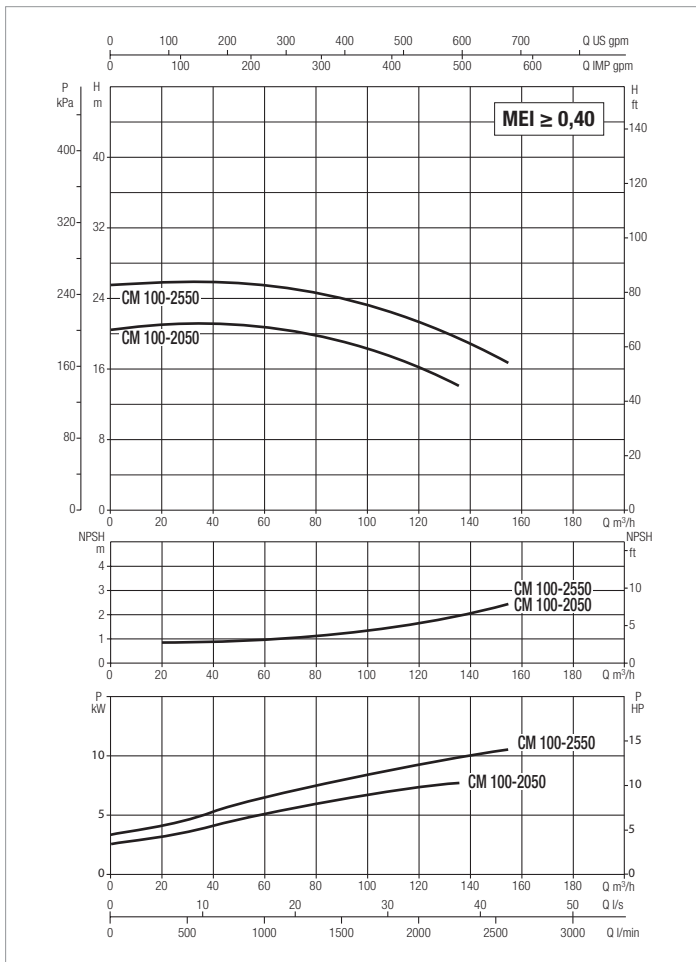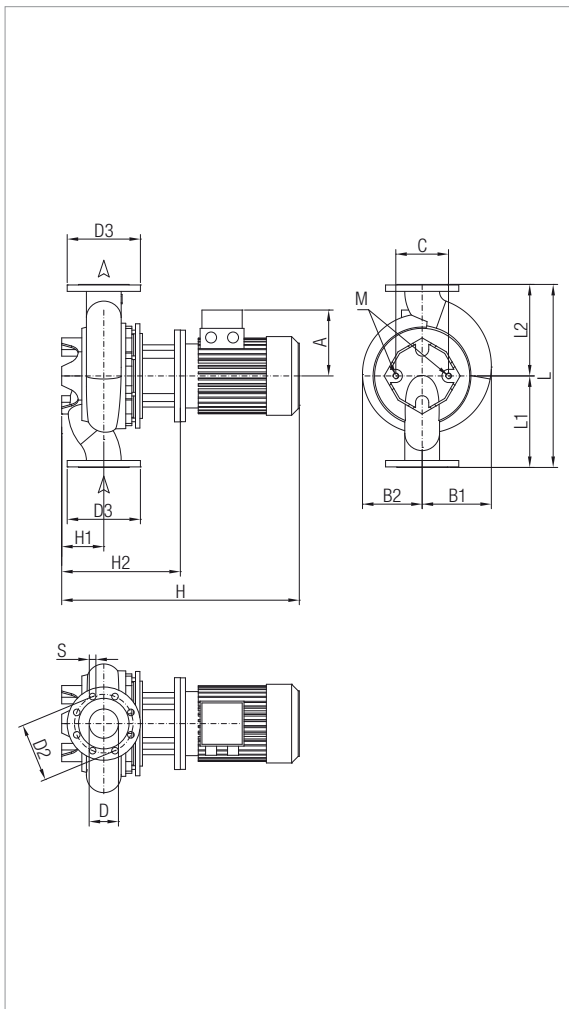

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP				
CM-G 100-2050/A/BAQE/7,5	670	DN 100	3 x 400 V ~ ¹	1461	8,5	7,5	10	14,4	IE3	MEC 132M	124,1
CM-G 100-2550/A/BAQE/11	670	DN 100	3 x 400 V ~ ¹	1470	12,1	11	15	22,4	IE3	MEC 160M	172,2

¹ star start-up possible (Δ)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 100-2050/A/BAQE/7,5	188	293	253	230	100	180	220	18	8	890	175	453	670	335	335	M16	739	626	1107	0,512	230
CM-G 100-2550/A/BAQE/11	249	293	253	230	100	180	220	18		988	175	483	670	335	335	M16	1200	720	758	0,655	323

CM-G 100 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

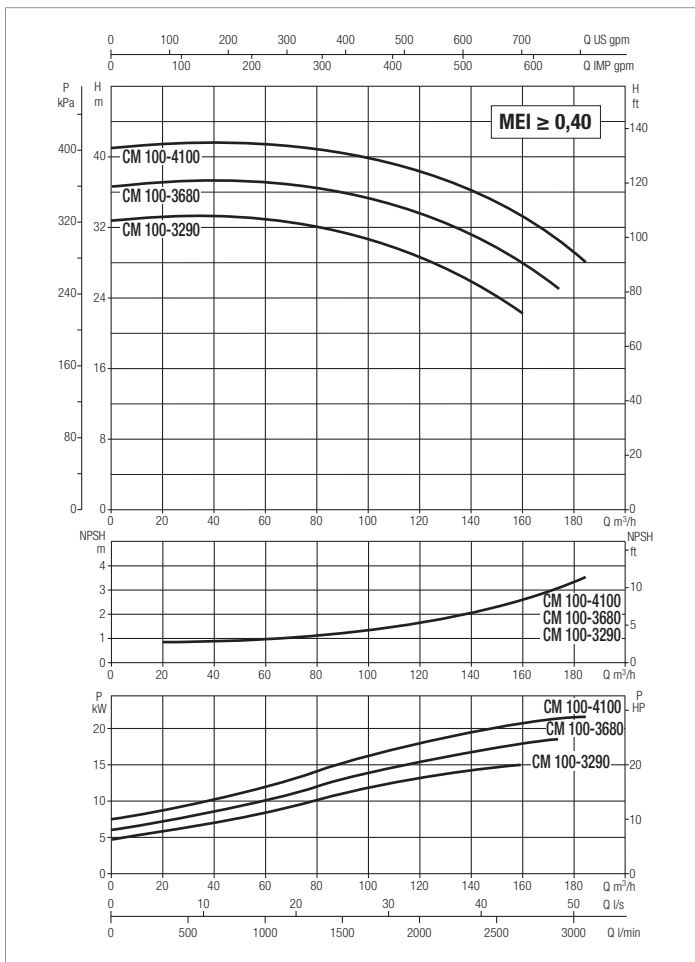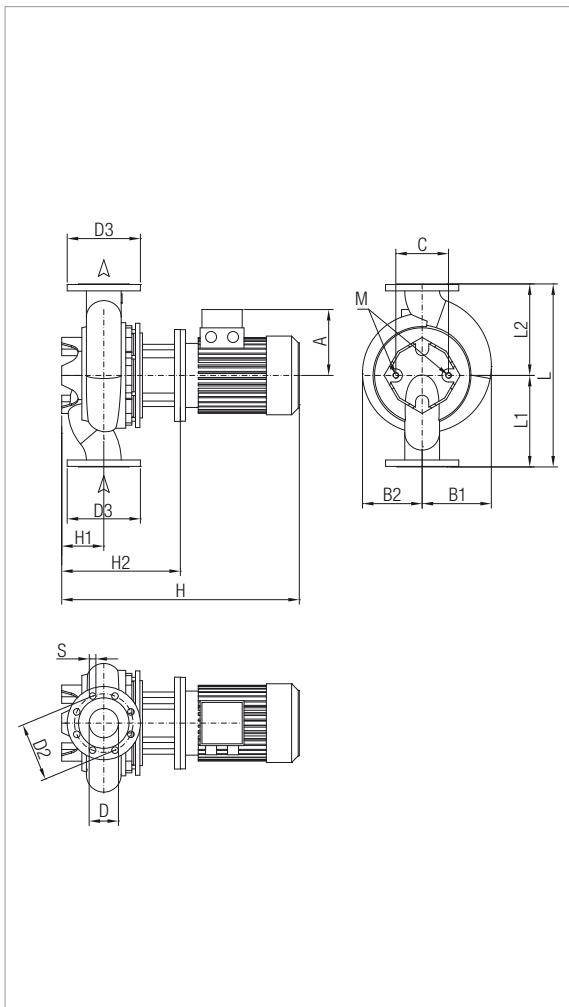

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
			kW		kW	HP					
CM-G 100-3290/A/BAQE/15	670	DN 100	3 x 400 V ~ ¹	1471	17,1	15	20	30,5	IE3	MEC 160L	232,4
CM-G 100-3680/A/BAQE/18,5	670	DN 100	3 x 400 V ~ ¹	1470	19,6	18,5	25	34,3	IE3	MEC 180M	268,6
CM-G 100-4100/A/BAQE/22	670	DN 100	3 x 400 V ~ ¹	1470	22,4	22	30	40,2	IE3	MEC 180L	336,1

¹ star start-up possible (Δ)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 100-3290/A/BAQE/15	249	293	253	230	100	180	220	18	8	1031	175	483	670	335	335	M16	1200	720	758	0,655	333
CM-G 100-3680/A/BAQE/18,5	265	293	253	230	100	180	220	18		1063	175	483	670	335	335	M16	1200	720	758	0,655	359
CM-G 100-4100/A/BAQE/22	265	293	253	230	100	180	220	18		1101	175	483	670	335	335	M16	1200	720	758	0,655	370

CM-G 125 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

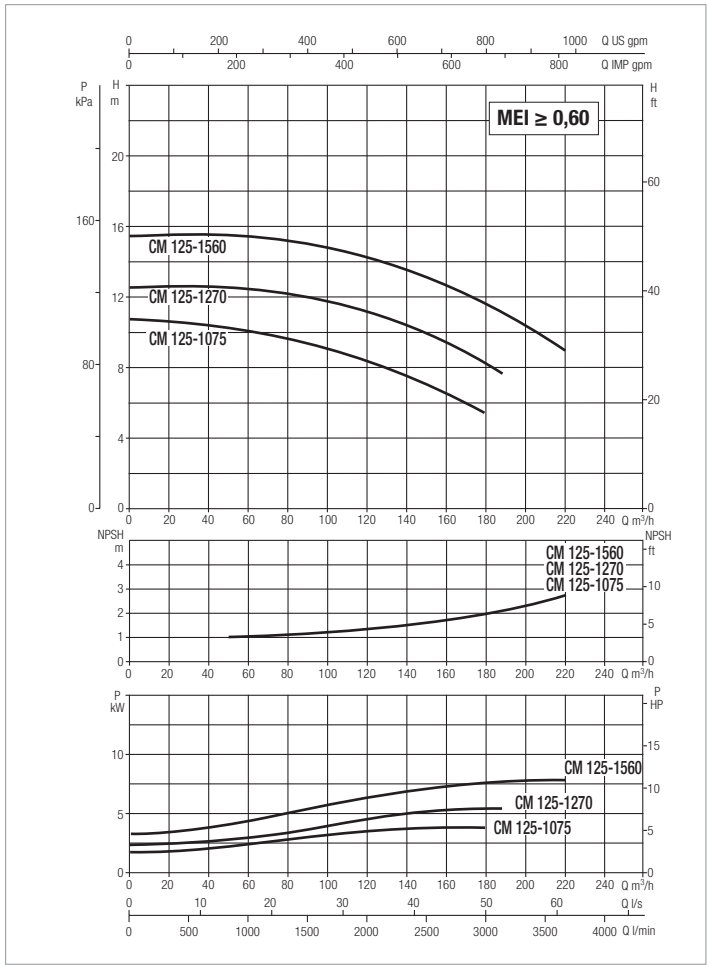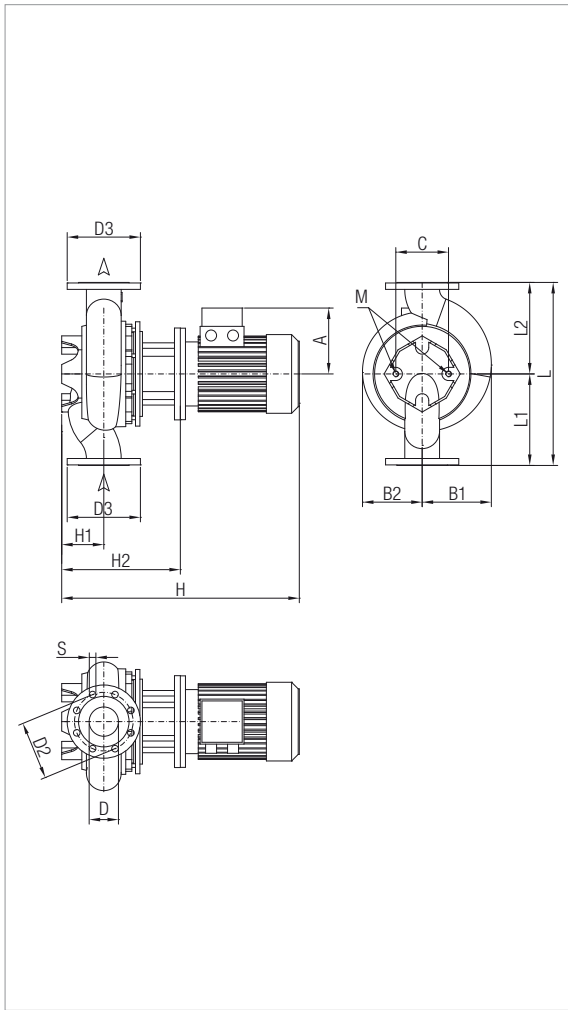

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
CM-G 125-1075/A/BAQE/4	620	DN 125	3 x 400V ~ ¹	1455	5,1	4	5,5	8,2	IE3	MEC 112M	57,8
CM-G 125-1270/A/BAQE/5,5	620	DN 125	3 x 400V ~ ¹	1465	7,2	5,5	7,5	10,6	IE3	MEC 132S	92,2
CM-G 125-1560/A/BAQE/7,5	620	DN 125	3 x 400V ~ ¹	1469	9,5	7,5	10	14,4	IE3	MEC 132M	124,1

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 125-1075/A/BAQE/4	161	252	204	230	125	210	250	18	8	880	215	482	620	310	310	M16	739	626	1107	0,512	191
CM-G 125-1270/A/BAQE/5,5	195	252	204	230	125	210	250	18		860	215	498	620	310	310	M16	739	626	1107	0,512	237
CM-G 125-1560/A/BAQE/7,5	188	252	204	230	125	210	250	18		935	215	498	620	310	310	M16	739	626	1107	0,512	218

CM-G 125 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

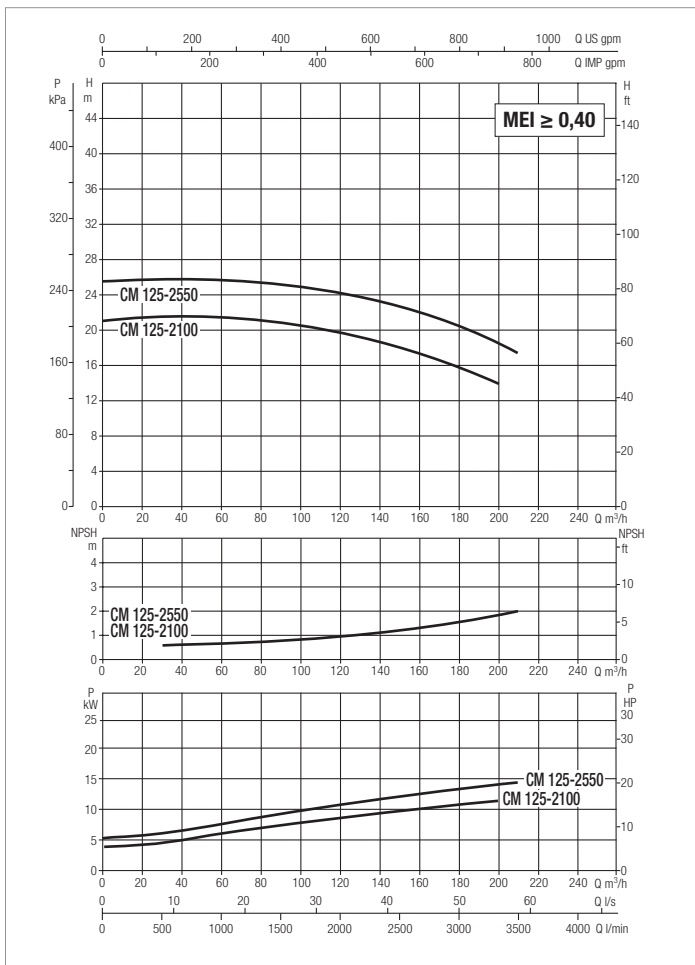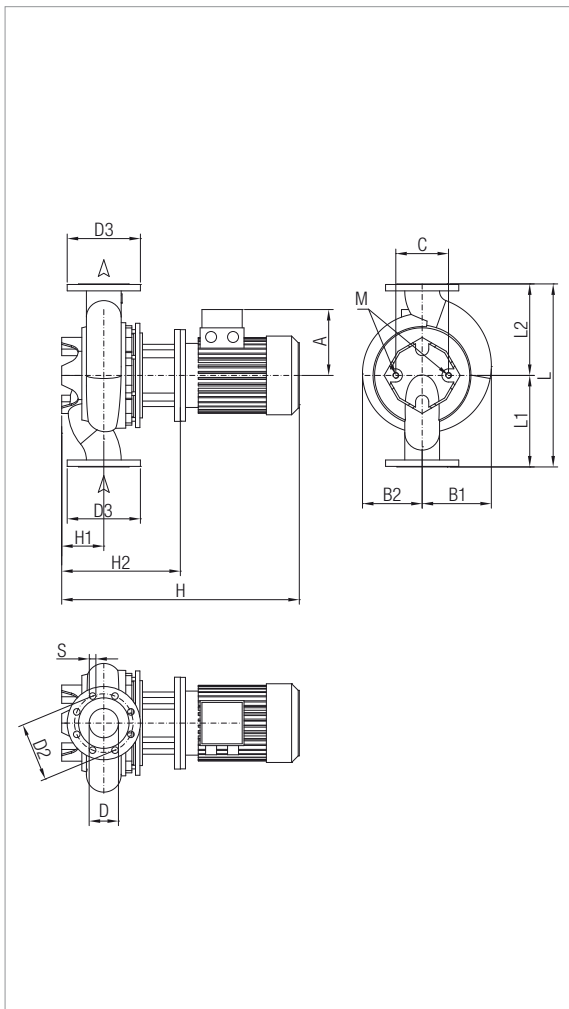

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A	
CM-G 125-2100/A/BAQE/11	800	DN 125	3x400V ~ ¹	1475	13,6	11	15	22,4	IE3	MEC 160M	172,2	
CM-G 125-2550/A/BAQE/15	800	DN 125	3x400V ~ ¹	1470	16,3	15	20	30,5	IE3	MEC 160L	232,4	

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 125-2100/A/BAQE/11	249	273	245	230	125	210	250	18	8	1038	215	533	800	400	400	M16	1440	1040	676	1,012	311
CM-G 125-2550/A/BAQE/15	249	273	245	230	125	210	250	18		1081	215	533	800	400	400	M16	1440	1040	676	1,012	321

CM-G 125 4 POLES- IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

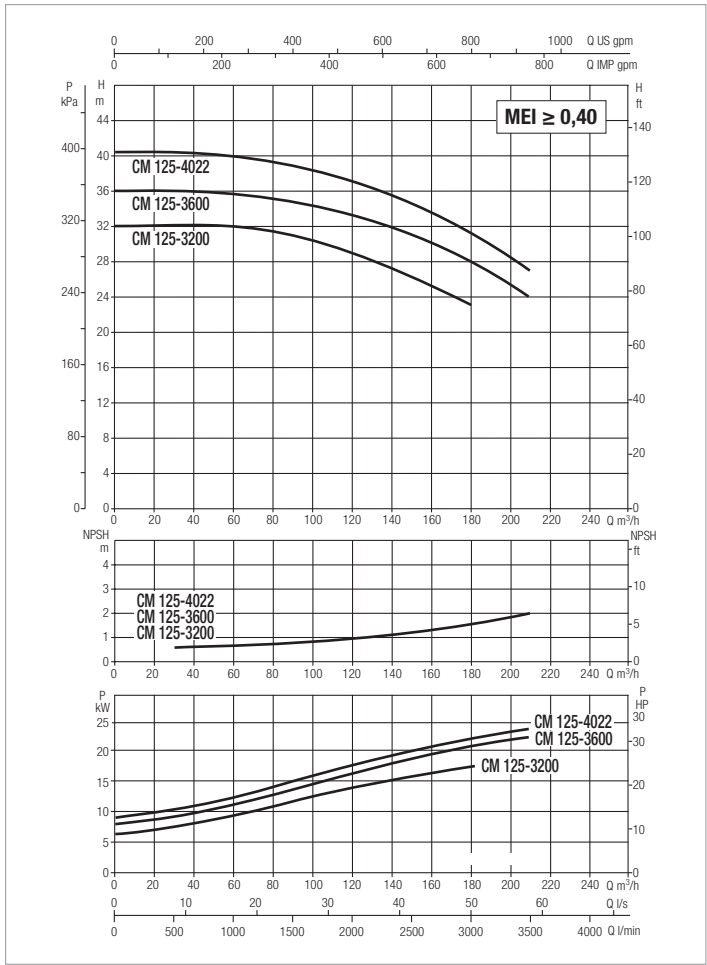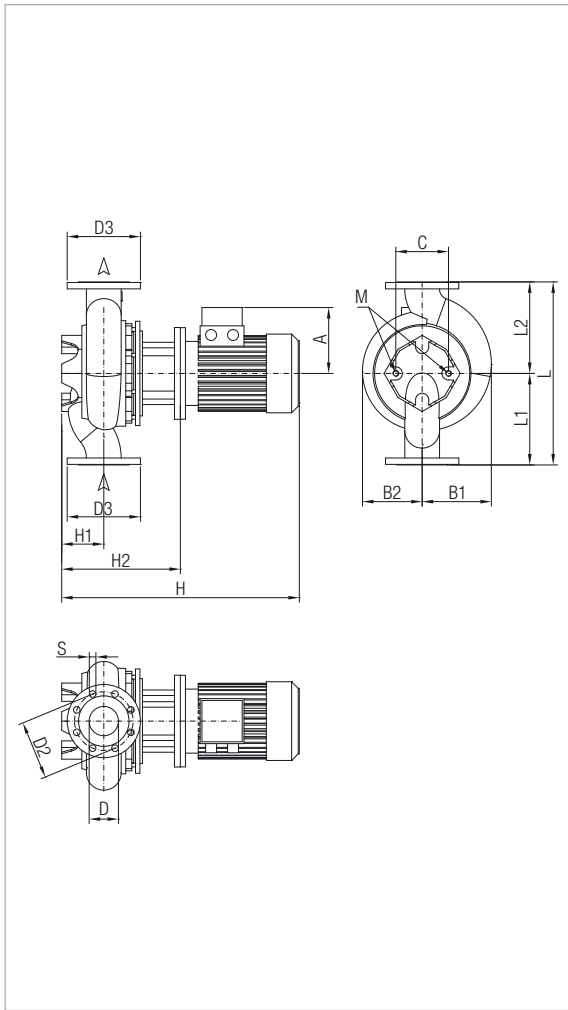

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
CM-G 125-3200/A/BAQE/18,5	800	DN 125	3 x 400 V ~ ¹	1471	17,9	18,5	25	34,3	IE3	MEC 180M	268,6
CM-G 125-3600/A/BAQE/22	800	DN 125	3 x 400 V ~ ¹	1470	22,4	22	30	40,2	IE3	MEC 180L	336,1
CM-G 125-4022/A/BAQE/30	800	DN 125	3 x 400 V ~ ¹	1478	26,5	30	40	53,7	IE3	MEC 200L	460,1

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 125-3200/A/BAQE/18,5	265	273	245	230	125	210	250	18	8	1113	215	533	800	400	400	M16	1440	1040	676	1,012	346
CM-G 125-3600/A/BAQE/22	265	273	245	230	125	210	250	18		1151	215	533	800	400	400	M16	1440	1040	676	1,012	357
CM-G 125-4022/A/BAQE/30	292	273	245	230	125	210	250	18		1203	215	533	800	400	400	M16	1440	1040	676	1,012	453

CM-G 150 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

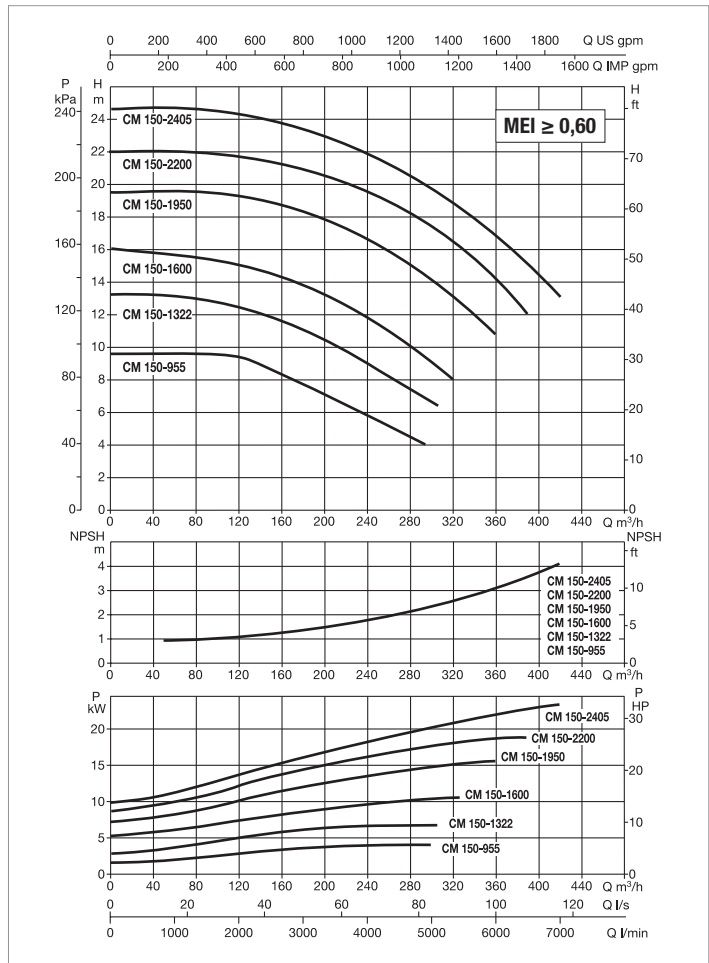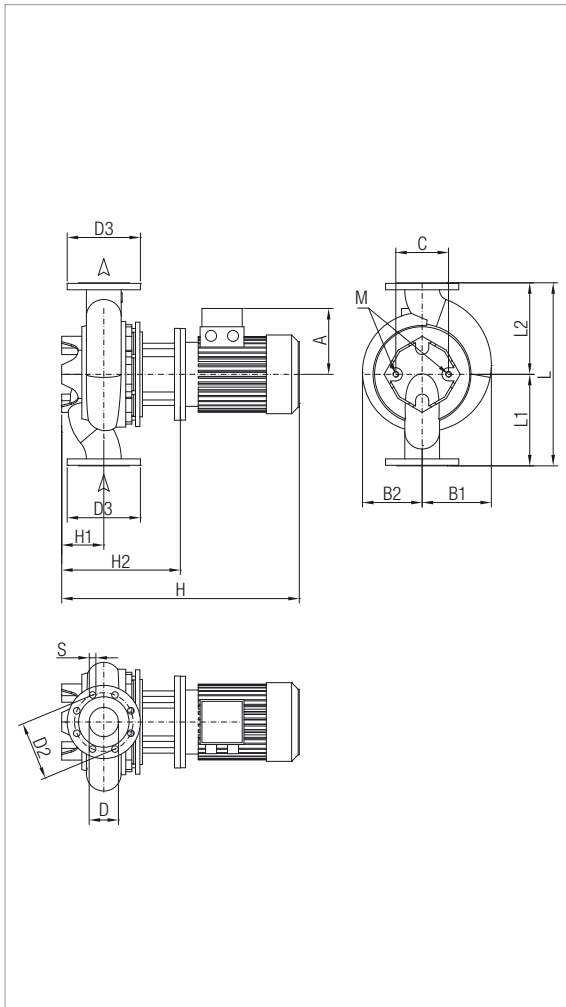

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
CM-G 150-955/A/BAQE/5,5	800	DN 150	3 x 400 V ~ ¹	1462	7,5	5,5	7,5	10,6	IE3	MEC 132S	92,2
CM-G 150-1322/A/BAQE/7,5	800	DN 150	3 x 400 V ~ ¹	1464	8,9	7,5	10	14,4	IE3	MEC 132M	124,1
CM-G 150-1600/A/BAQE/11	800	DN 150	3 x 400 V ~ ¹	1473	13	11	15	22,4	IE3	MEC 160M	172,2
CM-G 150-1950/A/BAQE/15	800	DN 150	3 x 400 V ~ ¹	1472	17,5	15	20	30,5	IE3	MEC 160L	232,4
CM-G 150-2200/A/BAQE/18,5	800	DN 150	3 x 400 V ~ ¹	1472	21,1	18,5	25	34,3	IE3	MEC 180M	268,6
CM-G 150-2405/A/BAQE/22	800	DN 150	3 x 400 V ~ ¹	1470	23,8	22	30	40,2	IE3	MEC 180L	336,1

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CM-G 150-955/A/BAQE/5,5	195	298	239	230	150	240	285	22	8	869	215	507	800	400	400	M16	934	584	1335	0,728	298
CM-G 150-1322/A/BAQE/7,5	188	298	239	230	150	240	285	22		944	215	507	800	400	400	M16	934	584	1335	0,728	279
CM-G 150-1600/A/BAQE/11	249	298	239	230	150	240	285	22		1042	215	537	800	400	400	M16	1440	1040	676	1,012	327
CM-G 150-1950/A/BAQE/15	249	298	239	230	150	240	285	22		1085	215	537	800	400	400	M16	1440	1040	676	1,012	337
CM-G 150-2200/A/BAQE/18,5	265	298	239	230	150	240	285	22		1117	215	537	800	400	400	M16	1440	1040	676	1,012	361
CM-G 150-2405/A/BAQE/22	265	298	239	230	150	240	285	22		1155	215	537	800	400	400	M16	1440	1040	676	1,012	373

DCM-G 65 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

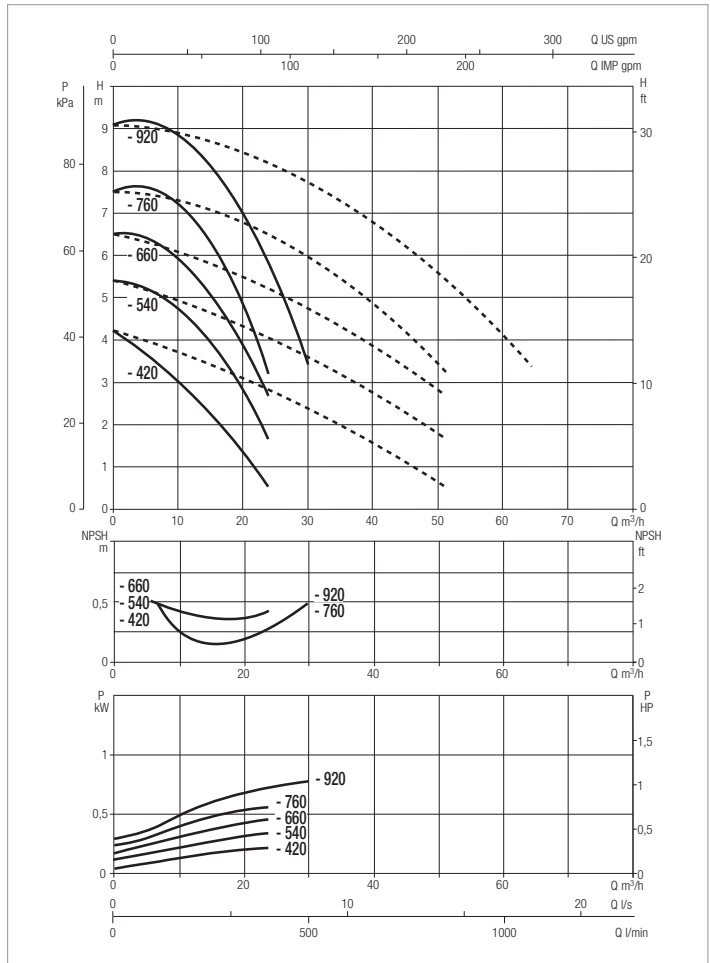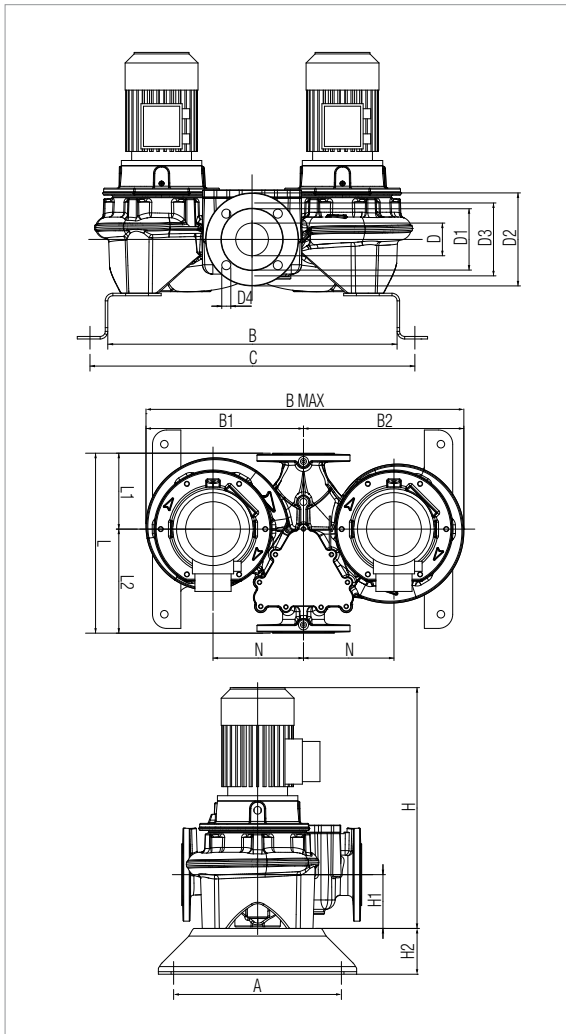

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCM-G 65-420/A/BAQE/0,25	360	DN 65	3x230-400 V ~	1400	0,4	0,25	0,33	1,6	0,9	-	MEC 71	4,6/2,6
DCM-G 65-540/A/BAQE/0,37	360	DN 65	3x230-400 V ~	1380	0,6	0,37	0,5	1,7	1	-	MEC 71	8,1/4,6
DCM-G 65-660/A/BAQE/0,55	360	DN 65	3x230-400 V ~	1400	0,8	0,55	0,75	2,6	1,5	-	MEC 80M	13,9/8
DCM-G 65-760/A/BAQE/0,55	360	DN 65	3x230-400 V ~	1390	0,8	0,55	0,75	2,6	1,5	-	MEC 80M	13,9/8
DCM-G 65-920/A/BAQE/0,75	360	DN 65	3x230-400 V ~	1430	1,2	0,75	1	3,12	1,8	IE3	MEC 80M	17,2/9,9

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
																					DCM-G 65-420/A/BAQE/0,25	330	569		
DCM-G 65-540/A/BAQE/0,37	330	569	315	320	635	639	65	122	185	145	18	479	107	100	360	151	207	M16	180	358	635	479	0,11	112	
DCM-G 65-660/A/BAQE/0,55	330	569	315	320	635	639	65	122	185	145	18	534	107	100	360	151	207	M16	180	358	635	534	0,12	136	
DCM-G 65-760/A/BAQE/0,55	330	569	315	320	635	639	65	122	185	145	18	534	107	100	360	151	207	M16	180	358	635	534	0,12	135	
DCM-G 65-920/A/BAQE/0,75	330	569	315	320	635	639	65	122	185	145	18	511	107	100	360	151	207	M16	180	358	635	534	0,12	126	

DCM-G 65 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

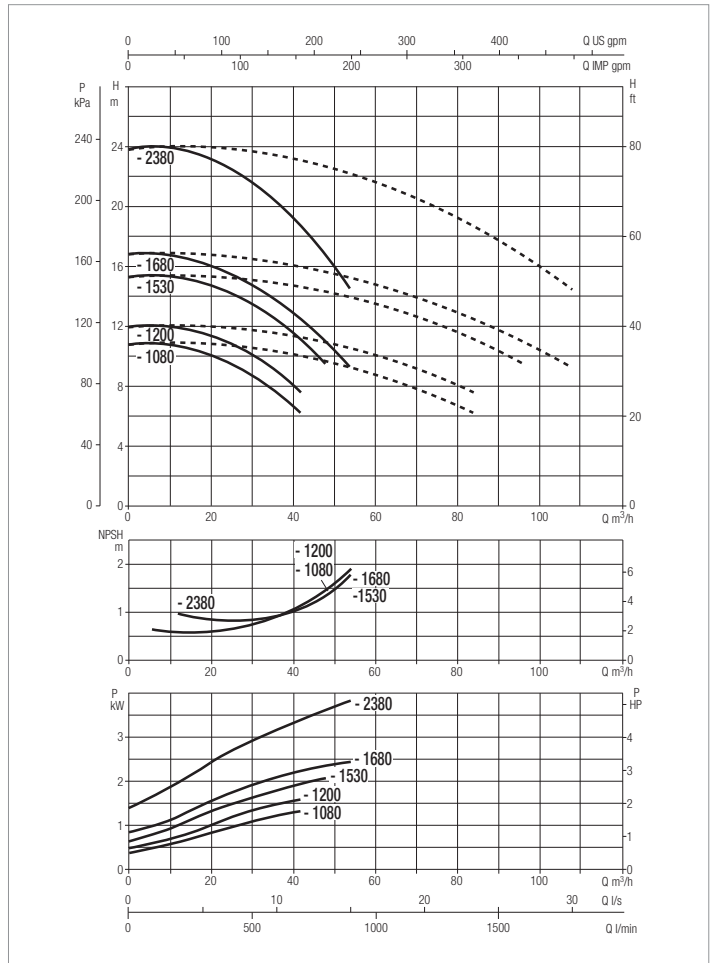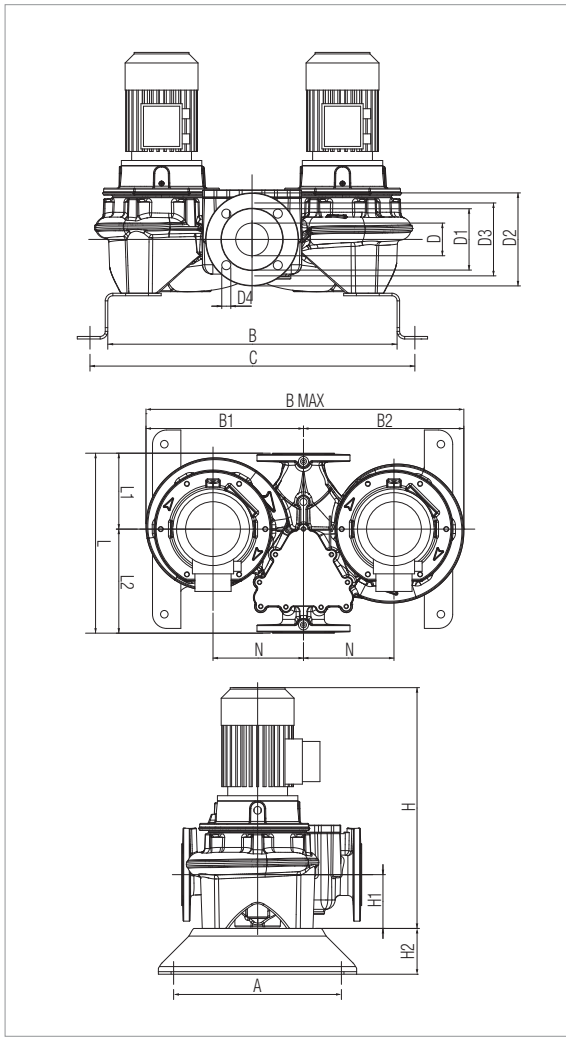

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCM-G 65-1080/A/BAQE/1,1	475	DN 65	3x230-400V ~	1435	1,6	1,1	1,5	4,33	2,5	IE3	MEC 90S	30,7/17,8
DCM-G 65-1200/A/BAQE/1,5	475	DN 65	3x230-400V ~	1430	2	1,5	2	6,24	3,6	IE3	MEC 90L	41,2/23,8
DCM-G 65-1530/A/BAQE/2,2	475	DN 65	3x230-400V ~	1455	2,9	2,2	3	10,22	5,9	IE3	MEC 100L	60,3/34,8
DCM-G 65-1680/A/BAQE/3	475	DN 65	3x400V ~ ¹	1448	2,7	3	4	-	6,8	IE3	MEC 100L	55,1
DCM-G 65-2380/A/BAQE/4	475	DN 65	3x400V ~ ¹	1449	4,3	4	5,5	-	8,2	IE3	MEC 112M	57,8

¹ star start-up possible (Δ)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
																					DCM-G 65-1080/A/BAQE/1,1	330	649		
DCM-G 65-1200/A/BAQE/1,5	330	649	387	395	782	719	65	122	185	145	18	4	597	125	100	475	177	298	M16	220	475	782	625	0,23	161
DCM-G 65-1530/A/BAQE/2,2	330	649	387	395	782	719	65	122	185	145	18	4	623	125	100	475	177	298	M16	220	475	782	644	0,24	173
DCM-G 65-1680/A/BAQE/3	330	649	387	395	782	719	65	122	185	145	18	4	623	125	100	475	177	298	M16	220	475	782	644	0,24	166
DCM-G 65-2380/A/BAQE/4	330	649	387	395	782	719	65	122	185	145	18	4	717	125	100	475	177	298	M16	220	475	782	729	0,27	188

DCM-G 80 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

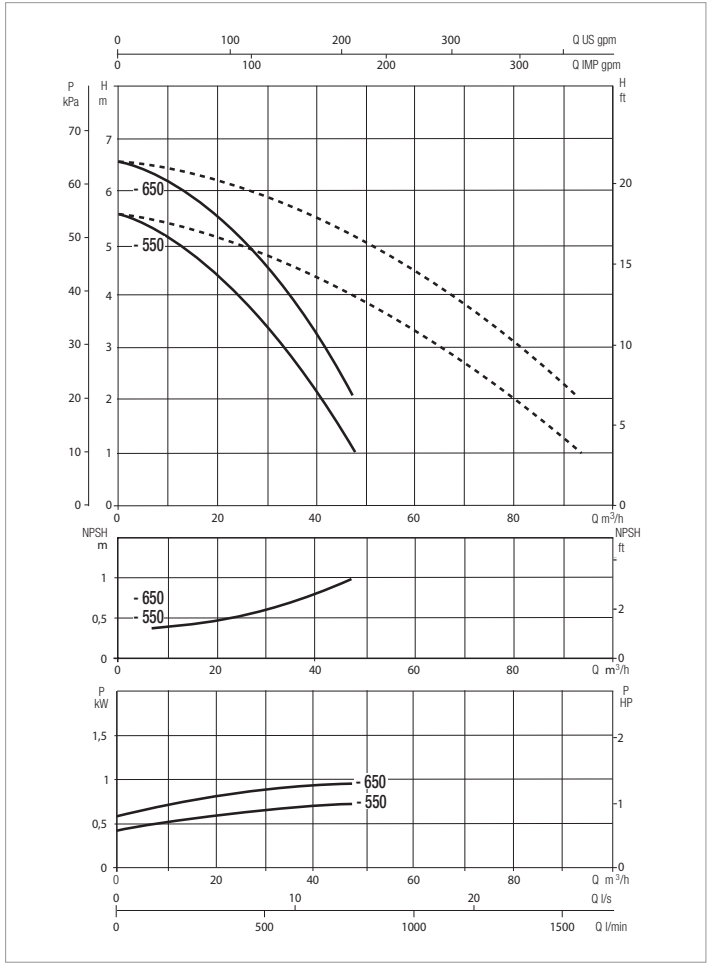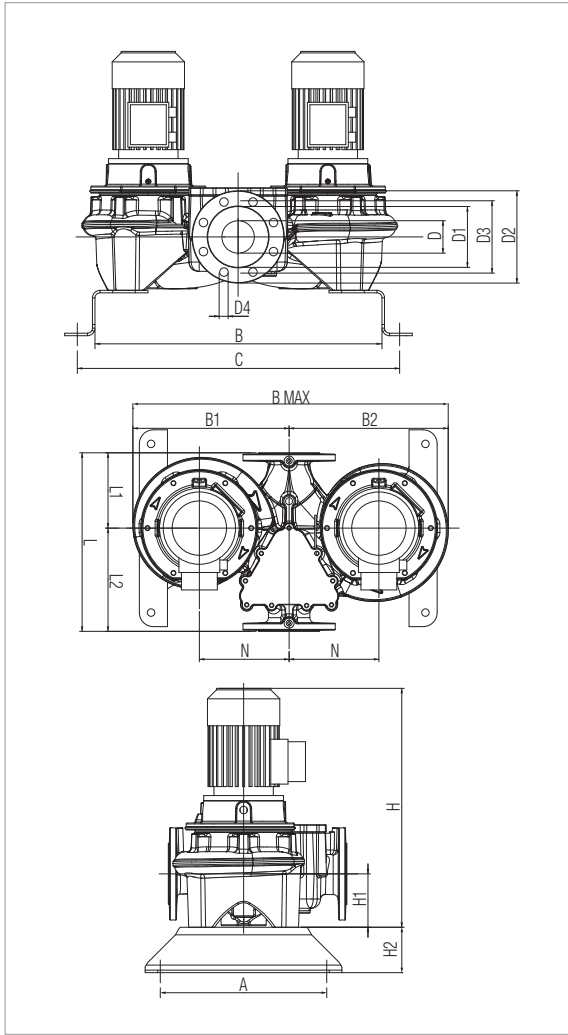

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCM-G 80-550/A/BAQE/0,55	360	DN 80	3x230-400V ~	1390	0,8	0,55	0,75	2,6	1,5	-	MEC 80M	13,9/8
DCM-G 80-650/A/BAQE/0,75	360	DN 80	3x230-400V ~	1430	1,2	0,75	1	3,12	1,8	IE3	MEC 80M	17,2/9,9

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 80-550/A/BAQE/0,55	330	580	305	310	615	650	80	137	200	160	18	8	546	115	100	360	165	195	M16	180	360	615	546	0,12	126
DCM-G 80-650/A/BAQE/0,75	330	580	305	310	615	650	80	137	200	160	18	8	523	115	100	360	165	195	M16	180	360	615	546	0,12	116

DCM-G 80 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

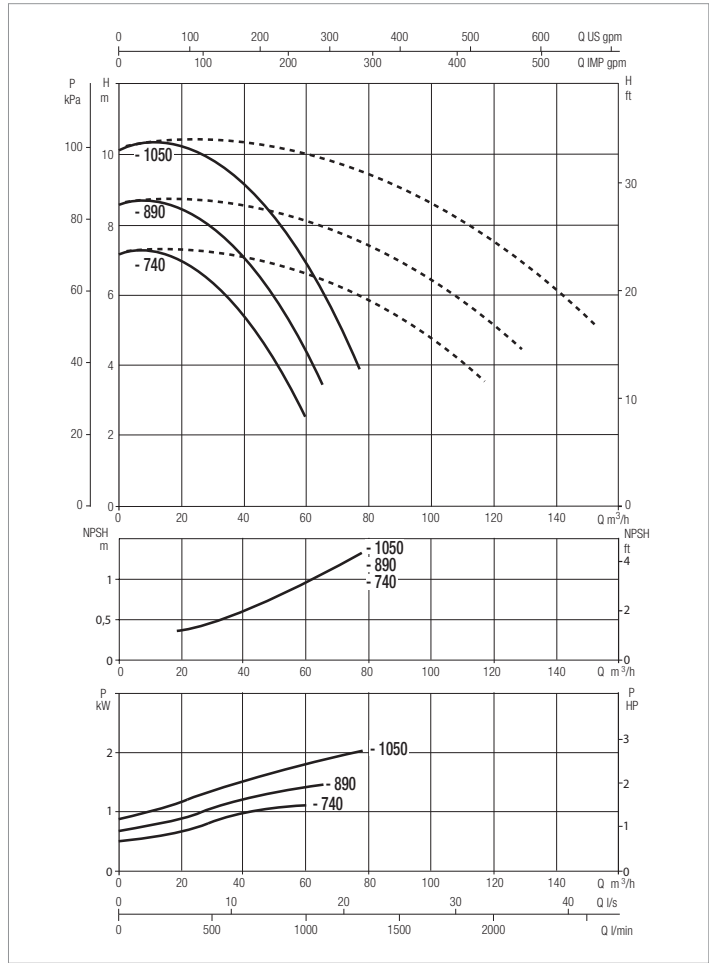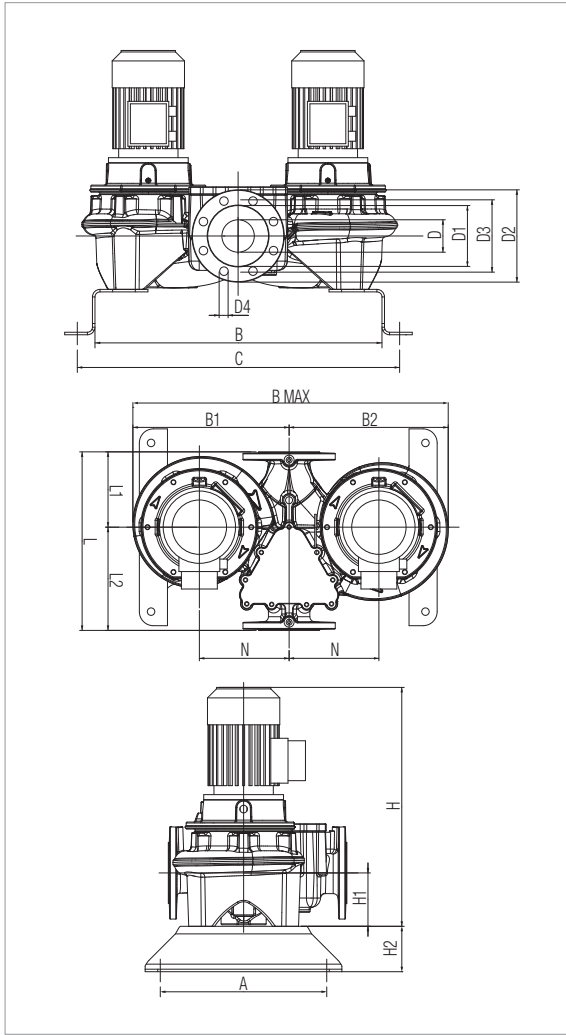

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCM-G 80-740/A/BAQE/1,1	440	DN 80	3x230-400 V ~	1439	1,5	1,1	1,5	4,33	2,5	IE3	MEC 90S	30,7/17,8
DCM-G 80-890/A/BAQE/1,5	440	DN 80	3x230-400 V ~	1430	2	1,5	2	6,24	3,6	IE3	MEC 90L	41,2/23,8
DCM-G 80-1050/A/BAQE/2,2	440	DN 80	3x230-400 V ~	1450	2,4	2,2	3	10,22	5,9	IE3	MEC 100L	60,3/34,8

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 80-740/A/BAQE/1,1	330	620	355	365	720	690	80	137	200	160	18	8	563	115	100	440	180	260	M16	200	440	720	586	0,19	178
DCM-G 80-890/A/BAQE/1,5	330	620	355	365	720	690	80	137	200	160	18		598	115	100	440	180	260	M16	200	440	720	626	0,2	179
DCM-G 80-1050/A/BAQE/2,2	330	620	355	365	720	690	80	137	200	160	18		623	115	100	440	180	260	M16	200	440	720	644	0,2	203

DCM-G 80 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

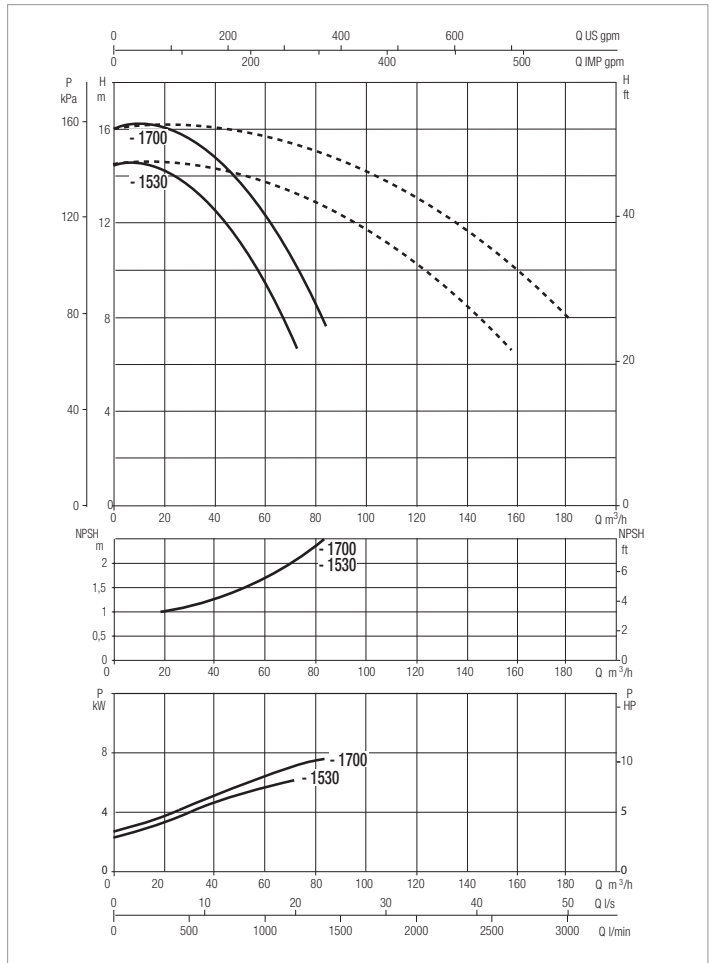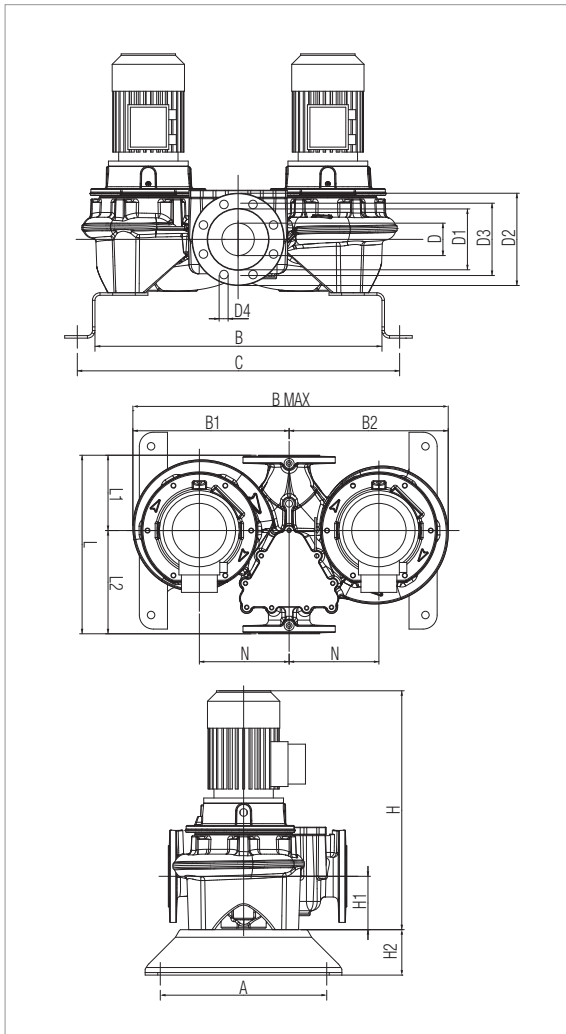

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
			50 Hz	n r.p.m.	KW	KW	HP	230 V	400 V			
DCM-G 80-1530/A/BAQE/3	500	DN 80	3 x 400 V ~ ¹	1441	3,6	3	4	-	6,8	IE3	MEC 100L	55,1
DCM-G 80-1700/A/BAQE/4	500	DN 80	3 x 400 V ~ ¹	1452	3,9	4	5,5	-	8,2	IE3	MEC 112M	57,8

¹ star start-up possible (Δ)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 80-1530/A/BAQE/3	362	662	405	415	820	732	80	137	200	160	18	8	629	115	100	500	220	280	M16	235	500	820	650	0,27	211
DCM-G 80-1700/A/BAQE/4	362	662	405	415	820	732	80	137	200	160	18		723	115	100	500	220	280	M16	235	500	820	735	0,3	232

DCM-G 80 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

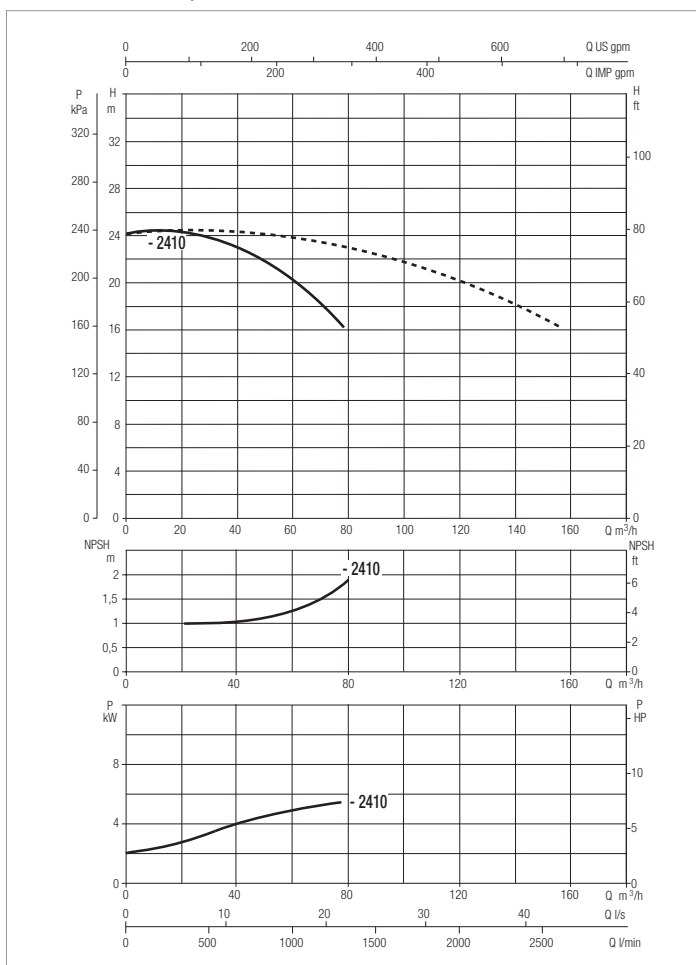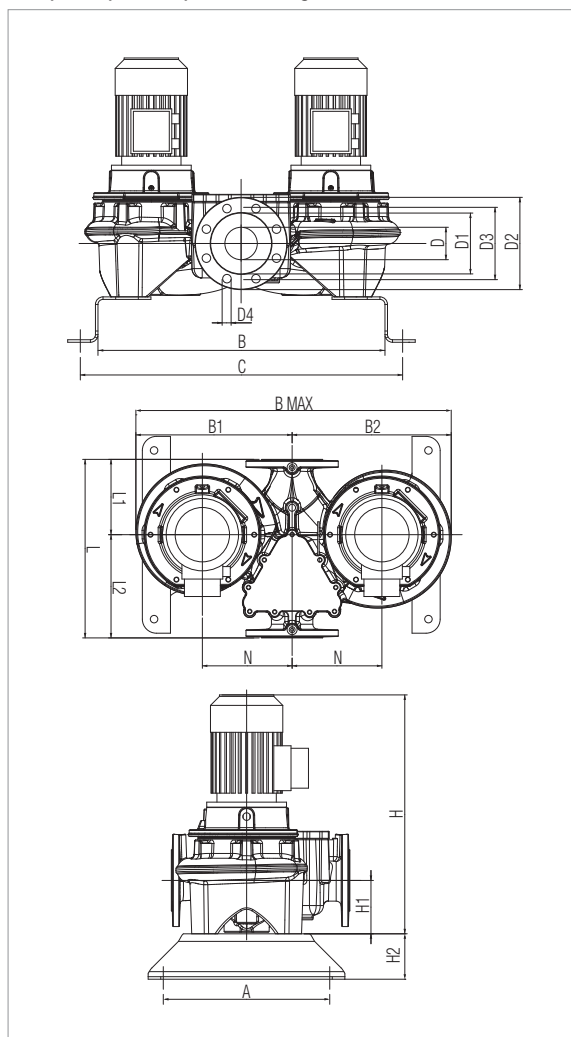

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								MOTOR TYPE	MOTOR SIZE	I st. A
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A					
DCM-G 80-2410/A/BAQE/5,5	620	DN 80	3 x 400 V ~ ¹	1461	6,5	5,5	7,5	-	10,6	IE3	MEC 132S	92,2	

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 80-2410/A/BAQE/5,5	500	804	530	540	1070	924	80	137	200	160	18	8	775	140	100	620	280	340	M16	300	620	1070	803	0,53	447

DCM-G 80 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

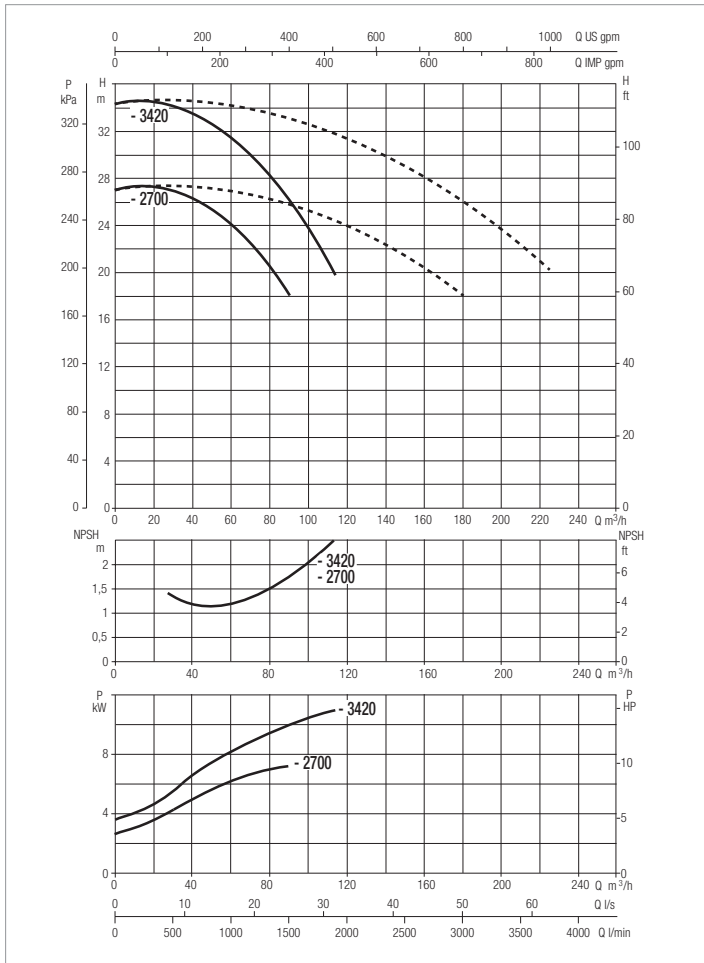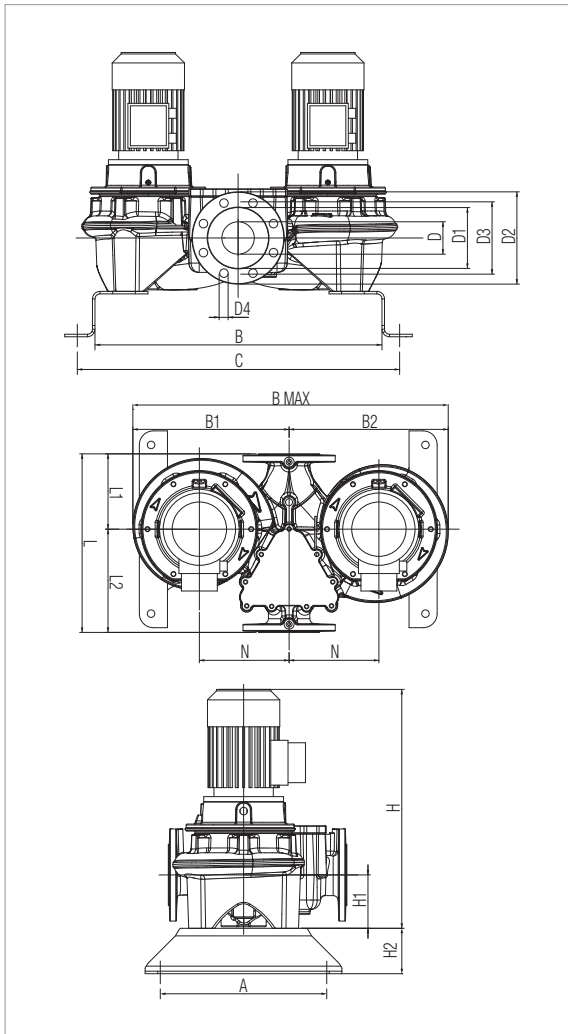

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCM-G 80-2700/A/BAQE/7,5	620	DN 80	3 x 400 V ~ ¹	1463	8,7	7,5	10	-	14,4	IE3	MEC 132M	124,1
DCM-G 80-3420/A/BAQE/11	620	DN 80	3 x 400 V ~ ¹	1472	12,7	11	15	-	22,4	IE3	MEC 160M	172,2

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 80-2700/A/BAQE/7,5	500	804	530	540	1070	924	80	137	200	160	18	8	850	140	100	620	280	340	M16	300	620	1070	843	0,56	468
DCM-G 80-3420/A/BAQE/11	500	804	530	540	1070	924	80	137	200	160	18		948	140	100	620	280	340	M16	300	620	1070	948	0,63	502

DCM-G 100 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

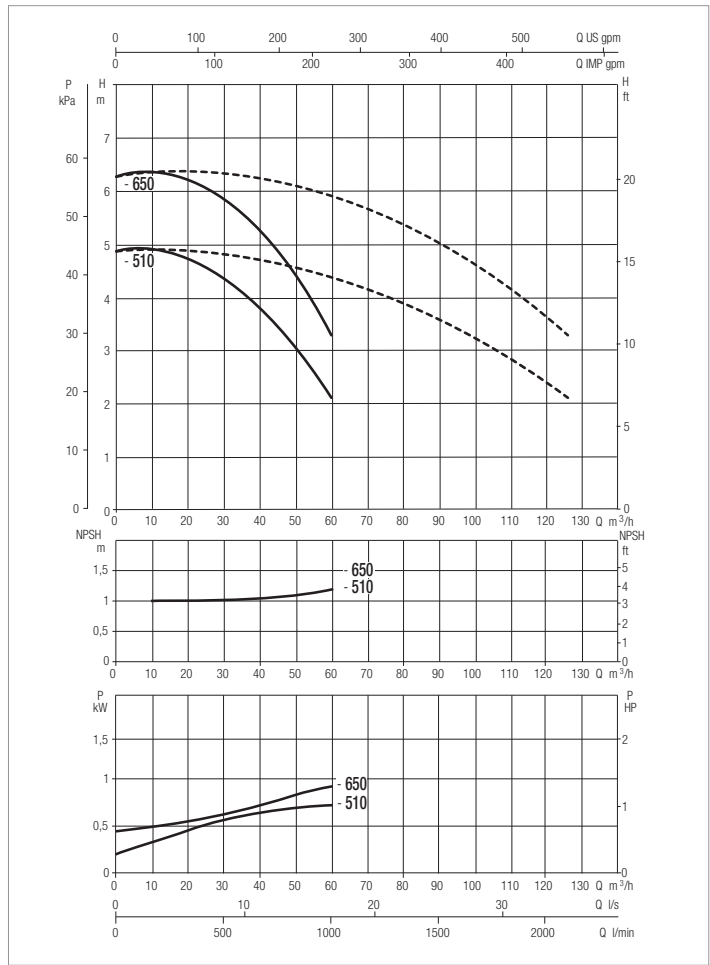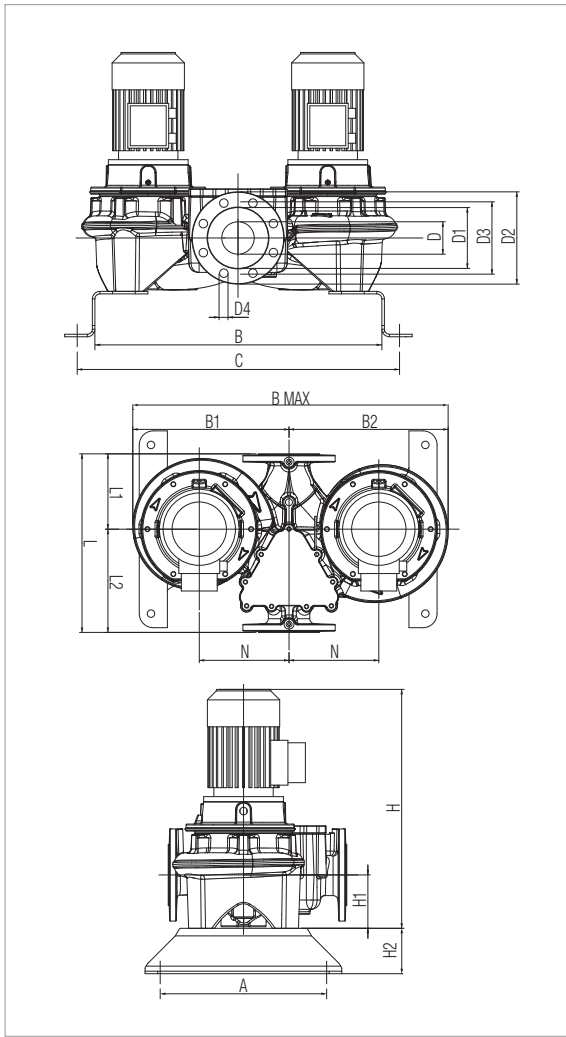

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCM-G 100-510/A/BAQE/0,75	500	DN 100	3x230-400 V ~	1430	1,2	0,75	1	3,12	1,8	IE3	MEC 80M	17,2/9,9
DCM-G 100-650/A/BAQE/1,1	500	DN 100	3x230-400 V ~	1440	1,4	1,1	1,5	4,33	2,5	IE3	MEC 90S	30,7/17,8

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 100-510/A/BAQE/0,75	362	637	330	345	675	717	100	156	220	180	18	8	550	140	100	500	191	309	M16	200	500	675	573	0,19	200
DCM-G 100-650/A/BAQE/1,1	362	637	330	345	675	717	100	156	220	180	18		585	140	100	500	191	309	M16	200	500	675	613	0,21	202

DCM-G 100 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

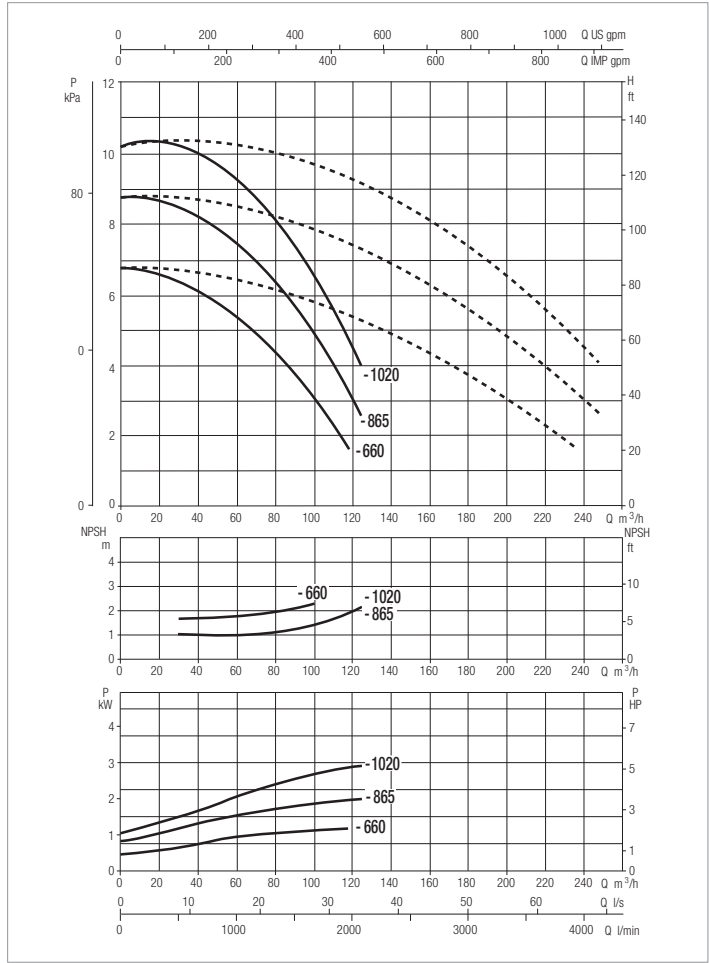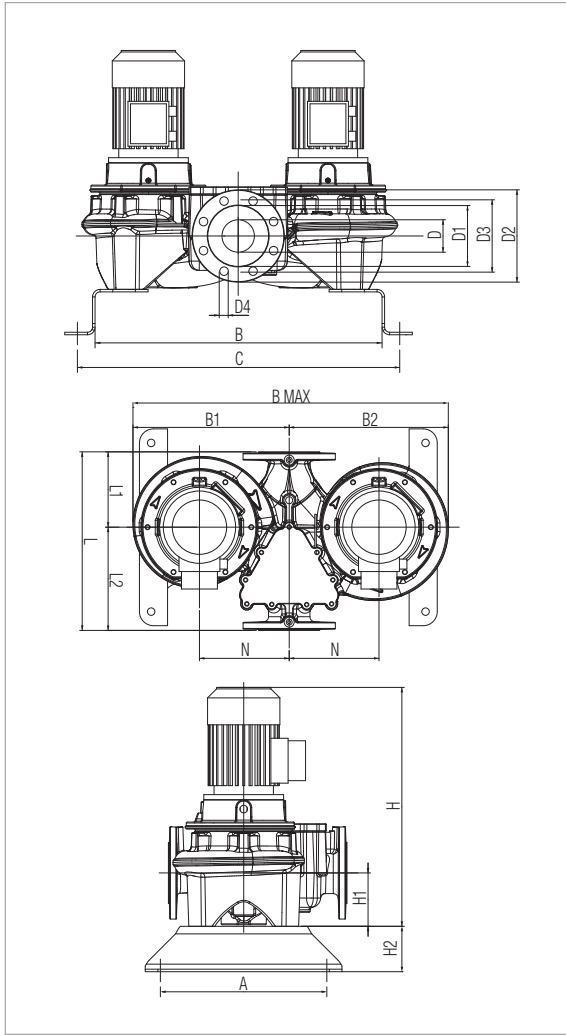

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCM-G 100-660/A/BAQE/1,5	550	DN 100	3x230-400 V ~	1430	2	1,5	2	6,24	3,6	IE3	MEC 90L	41,2/23,8
DCM-G 100-865/A/BAQE/2,2	550	DN 100	3x230-400 V ~	1455	3	2,2	3	10,22	5,9	IE3	MEC 100L	60,3/34,8
DCM-G 100-1020/A/BAQE/3	550	DN 100	3x400V ~ ¹	1441	3,6	3	4	-	6,8	IE3	MEC 100L	55,1

¹ star start-up possible (Δ)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 100-660/A/BAQE/1,5	362	733	395	410	805	813	100	156	220	180	18	8	620	140	100	550	221	329	M16	235	550	805	648	0,29	229
DCM-G 100-865/A/BAQE/2,2	362	733	395	410	805	813	100	156	220	180	18		645	140	100	550	221	329	M16	235	550	805	666	0,29	225
DCM-G 100-1020/A/BAQE/3	362	733	395	410	805	813	100	156	220	180	18		645	140	100	550	221	329	M16	235	550	805	666	0,29	224

DCM-G 100 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

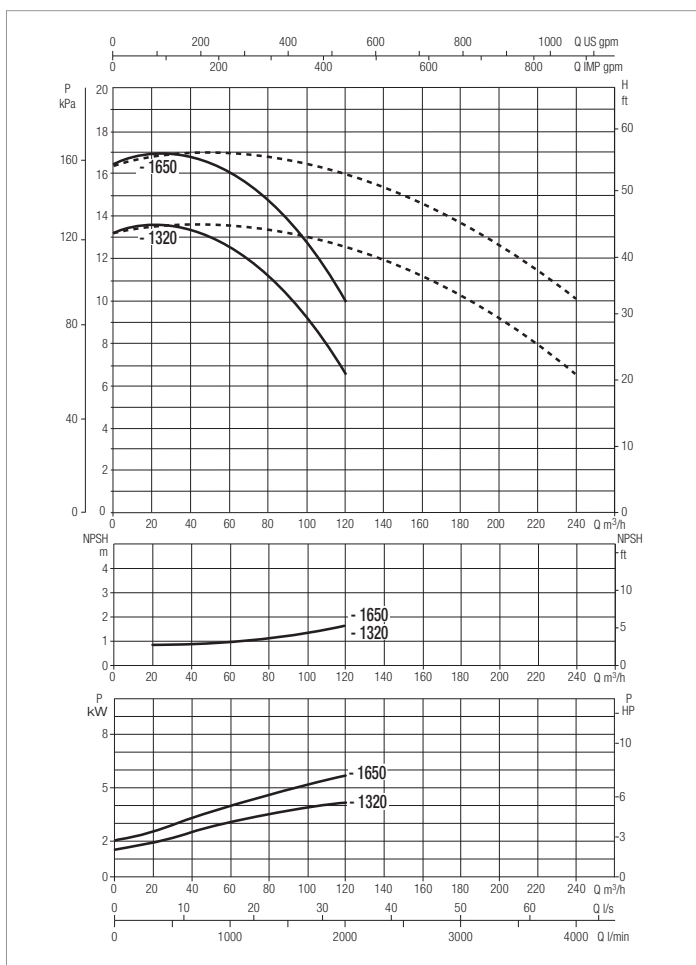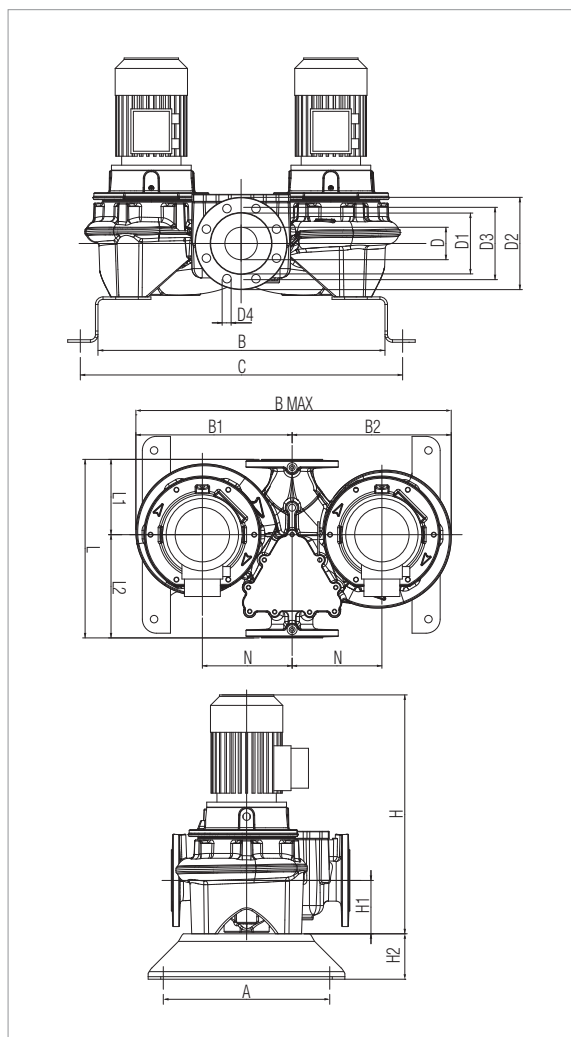

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCM-G 100-1320/A/BAQE/4	550	DN 100	3 x 400 V ~ ¹	1450	4,6	4	5,5	-	8,2	IE3	MEC 112M	57,8
DCM-G 100-1650/A/BAQE/5,5	550	DN 100	3 x 400 V ~ ¹	1464	6,9	5,5	7,5	-	10,6	IE3	MEC 132S	92,2

¹ star start-up possible (Δ)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 100-1320/A/BAQE/4	362	753	430	440	870	833	100	156	220	180	18	8	799	140	100	550	221	329	M16	250	550	870	811	0,39	263
DCM-G 100-1650/A/BAQE/5,5	362	753	430	440	870	833	100	156	220	180	18	8	784	140	100	550	221	329	M16	250	550	870	812	0,39	356

DCM-G 100 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

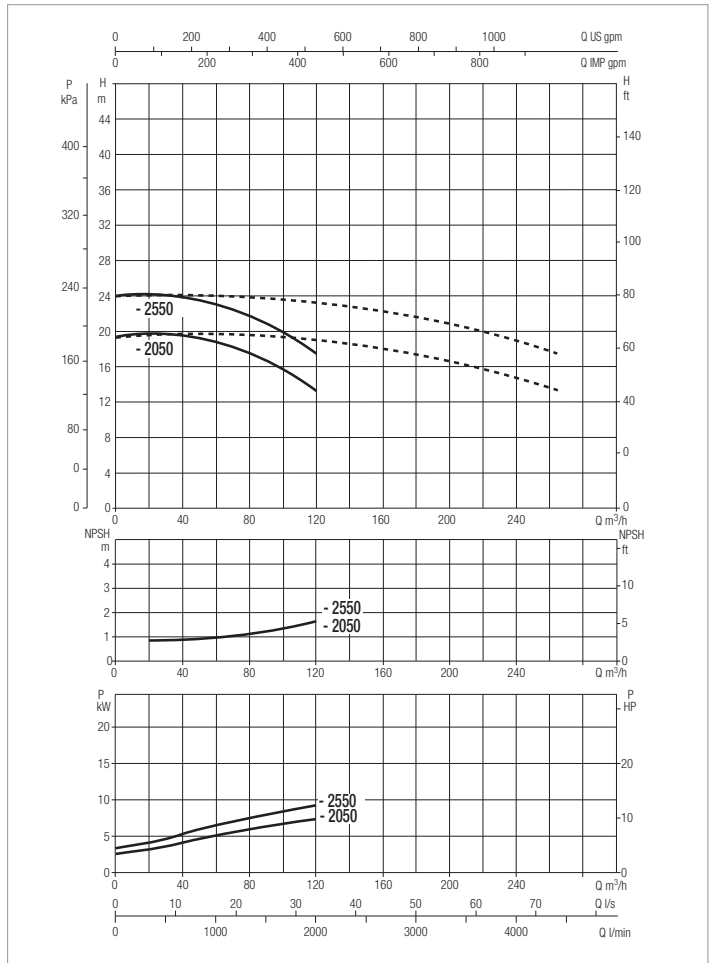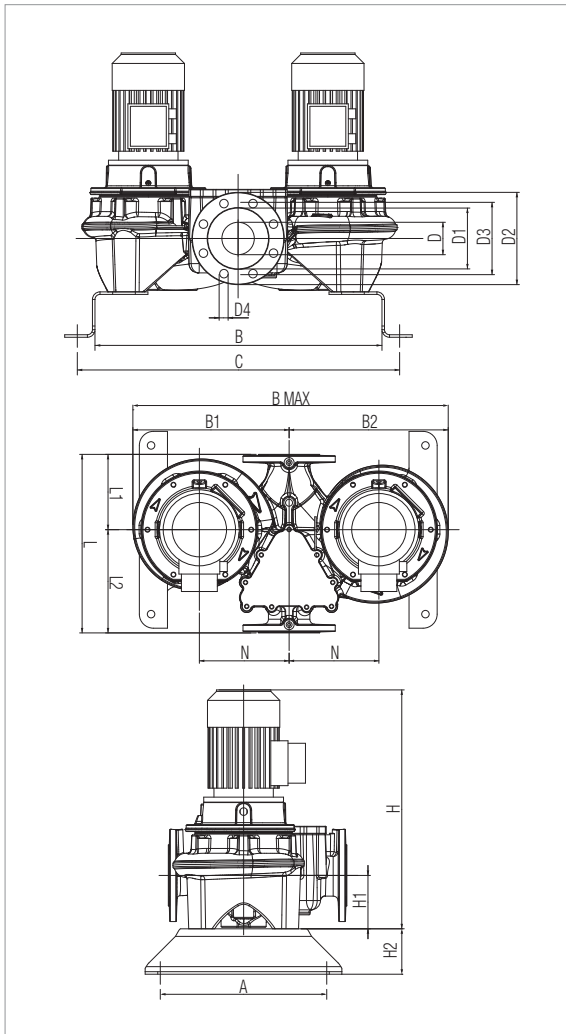

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
					kW	HP	230 V	400 V				
DCM-G 100-2050/A/BAQE/7,5	670	DN 100	3x400V ~ ¹	1461	8,5	7,5	10	-	14,4	IE3	MEC 132M	124,1
DCM-G 100-2550/A/BAQE/11	670	DN 100	3x400V ~ ¹	1470	12,1	11	15	-	22,4	IE3	MEC 160M	172,2

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 100-2050/A/BAQE/7,5	500	836	560	575	1135	956	100	156	220	180	18	18	895	175	100	670	266	404	M16	300	670	1135	888	0,68	527
DCM-G 100-2550/A/BAQE/11	500	836	560	575	1135	956	100	156	220	180	18		993	175	100	670	266	404	M16	300	670	1135	993	0,76	534

DCM-G 100 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

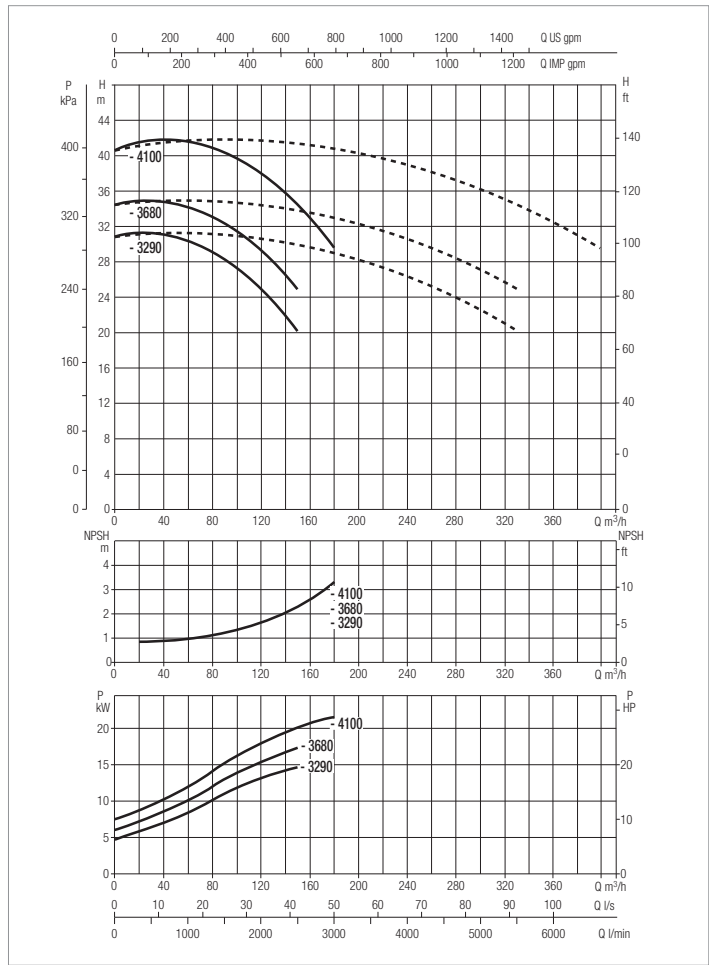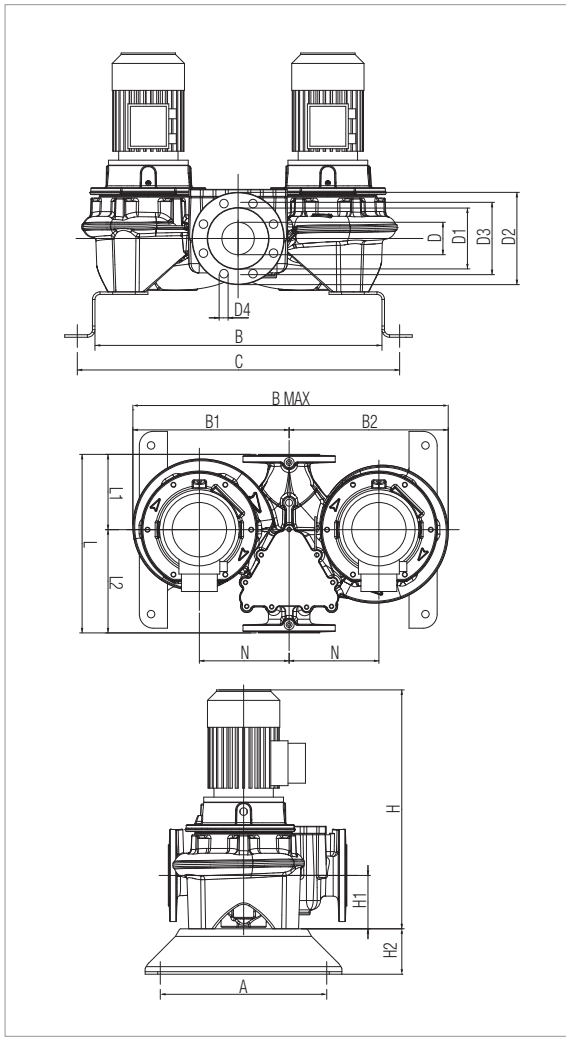

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
					kW	HP	230 V	400 V				
DCM-G 100-3290/A/BAQE/15	670	DN 100	3 x 400 V ~ ¹	1471	17,1	15	20	-	30,5	IE3	MEC 160L	232,4
DCM-G 100-3680/A/BAQE/18,5	670	DN 100	3 x 400 V ~ ¹	1470	19,6	18,5	25	-	34,3	IE3	MEC 180M	268,6
DCM-G 100-4100/A/BAQE/22	670	DN 100	3 x 400 V ~ ¹	1470	22,4	22	30	-	40,2	IE3	MEC 180L	336,1

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 100-3290/A/BAQE/15	500	836	560	575	1135	956	100	156	220	180	18	8	1036	175	100	670	266	404	M16	300	670	1135	1048	0,8	723
DCM-G 100-3680/A/BAQE/18,5	500	836	560	575	1135	956	100	156	220	180	18		1068	175	100	670	266	404	M16	300	670	1135	1068	0,81	860
DCM-G 100-4100/A/BAQE/22	500	836	560	575	1135	956	100	156	220	180	18		1106	175	100	670	266	404	M16	300	670	1135	1106	0,84	969

DCM-G 125 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

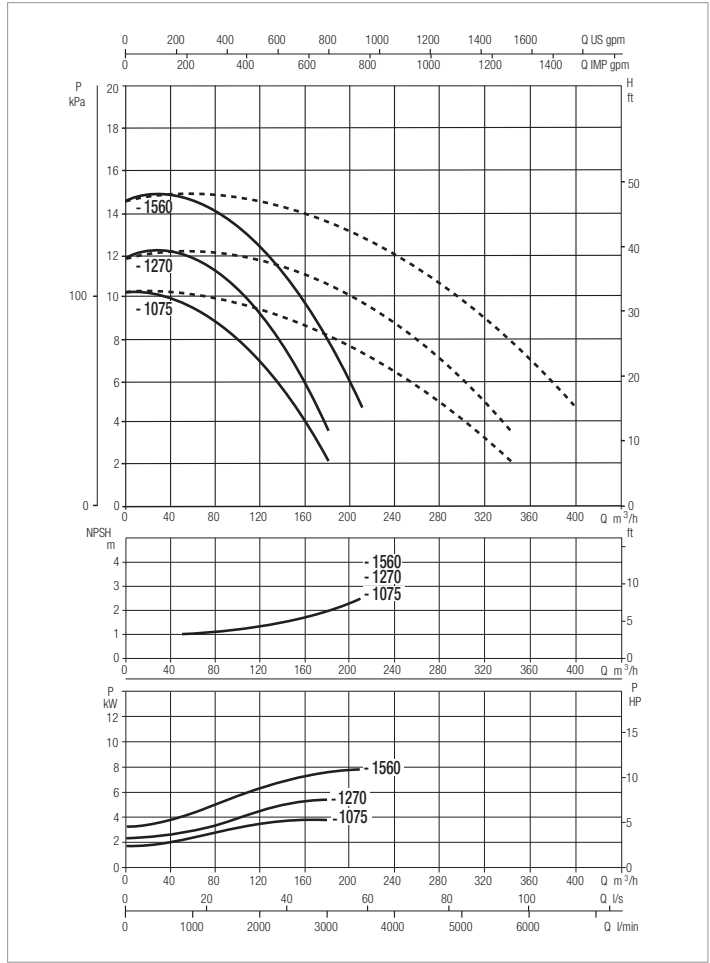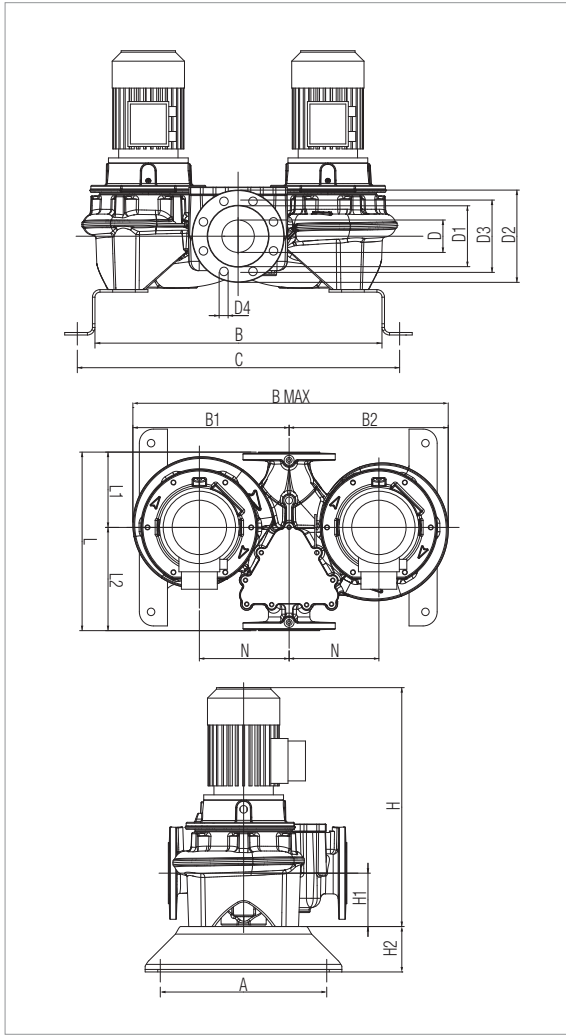

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
					KW	HP	230 V	400 V				
DCM-G 125-1075/A/BAQE/4	620	DN 125	3 x 400 V ~ ¹	1455	5,1	4	5,5	-	8,2	IE3	MEC 112M	57,8
DCM-G 125-1270/A/BAQE/5,5	620	DN 125	3 x 400 V ~ ¹	1465	7,2	5,5	7,5	-	10,6	IE3	MEC 132S	92,2
DCM-G 125-1560/A/BAQE/7,5	620	DN 125	3 x 400 V ~ ¹	1469	9,5	7,5	10	-	14,4	IE3	MEC 132M	124,1

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 125-1075/A/BAQE/4	500	810	515	535	1050	930	125	185	250	210	14	8	885	215	100	620	226	394	M16	300	620	1050	897	0,58	456
DCM-G 125-1270/A/BAQE/5,5	500	810	515	535	1050	930	125	185	250	210	14		885	215	100	620	226	394	M16	300	620	1050	893	0,58	508
DCM-G 125-1560/A/BAQE/7,5	500	810	515	535	1050	930	125	185	250	210	14		905	215	100	620	226	394	M16	300	620	1050	933	0,61	507

DCM-G 125 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

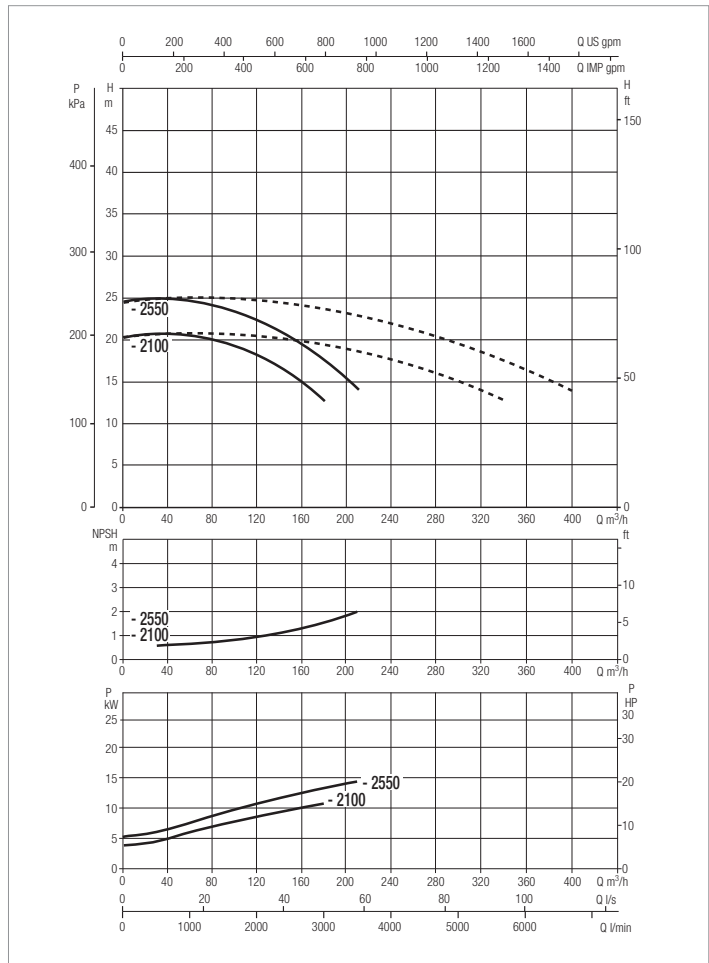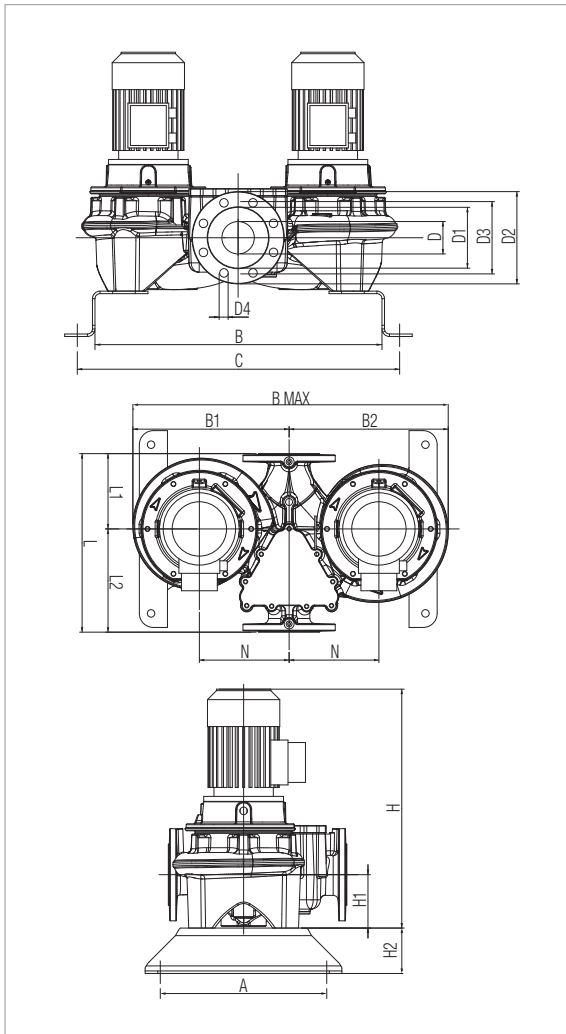

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCM-G 125-2100/A/BAQE/11	800	DN 125	3 x 400 V ~ ¹	1475	13,6	11	15	-	22,4	IE3	MEC 160M	172,2
DCM-G 125-2550/A/BAQE/15	800	DN 125	3 x 400 V ~ ¹	1470	16,3	15	20	-	30,5	IE3	MEC 160L	232,4

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 125-2100/A/BAQE/11	500	810	555	571	1126	930	125	185	250	210	14	8	1038	215	100	800	316	484	M16	300	800	1126	1053	0,95	737
DCM-G 125-2550/A/BAQE/15	500	810	555	571	1126	930	125	185	250	210	14	8	1096	215	100	800	316	484	M16	300	800	1126	1108	1	850

DCM-G 125 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

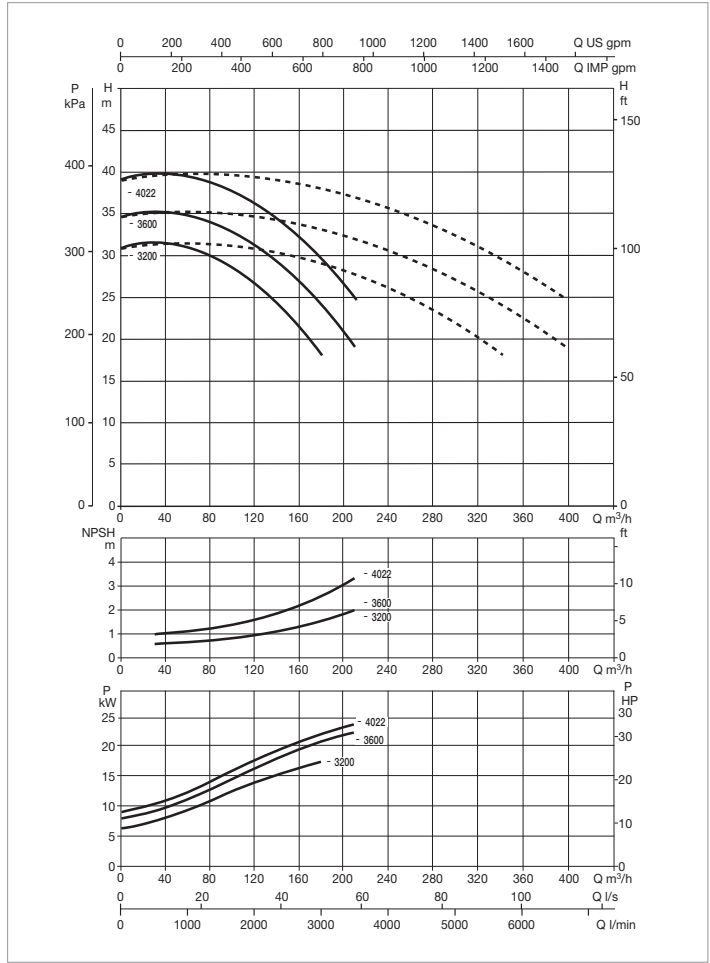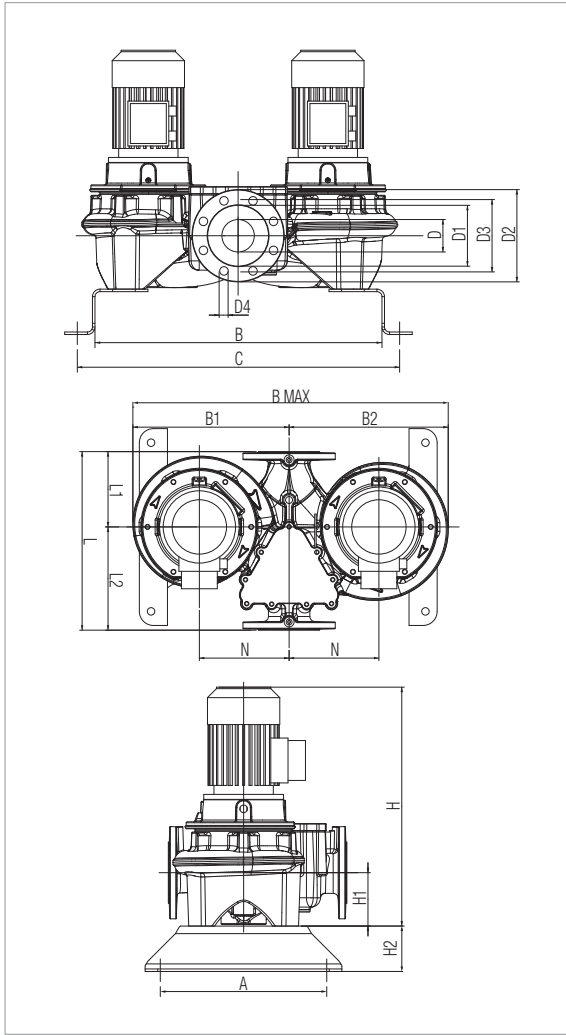

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCM-G 125-3200/A/BAQE/18,5	800	DN 125	3 x 400 V ~ ¹	1471	17,9	18,5	25	-	34,3	IE3	MEC 180M	268,6
DCM-G 125-3600/A/BAQE/22	800	DN 125	3 x 400 V ~ ¹	1470	22,4	22	30	-	40,2	IE3	MEC 180L	336,1
DCM-G 125-4022/A/BAQE/30	800	DN 125	3 x 400 V ~ ¹	1478	26,5	30	40	-	53,7	IE3	MEC 200L	460,1

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCM-G 125-3200/A/BAQE/18,5	500	810	555	571	1126	930	125	185	250	210	14	8	1128	215	100	800	316	484	M16	300	800	1126	1128	1,02	888
DCM-G 125-3600/A/BAQE/22	500	810	555	571	1126	930	125	185	250	210	14		1166	215	100	800	316	484	M16	300	800	1126	1166	1,05	933
DCM-G 125-4022/A/BAQE/30	500	810	555	571	1126	930	125	185	250	210	14		1196	215	100	800	316	484	M16	300	800	1126	1186	1,07	1073

DCM-G 150 4 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

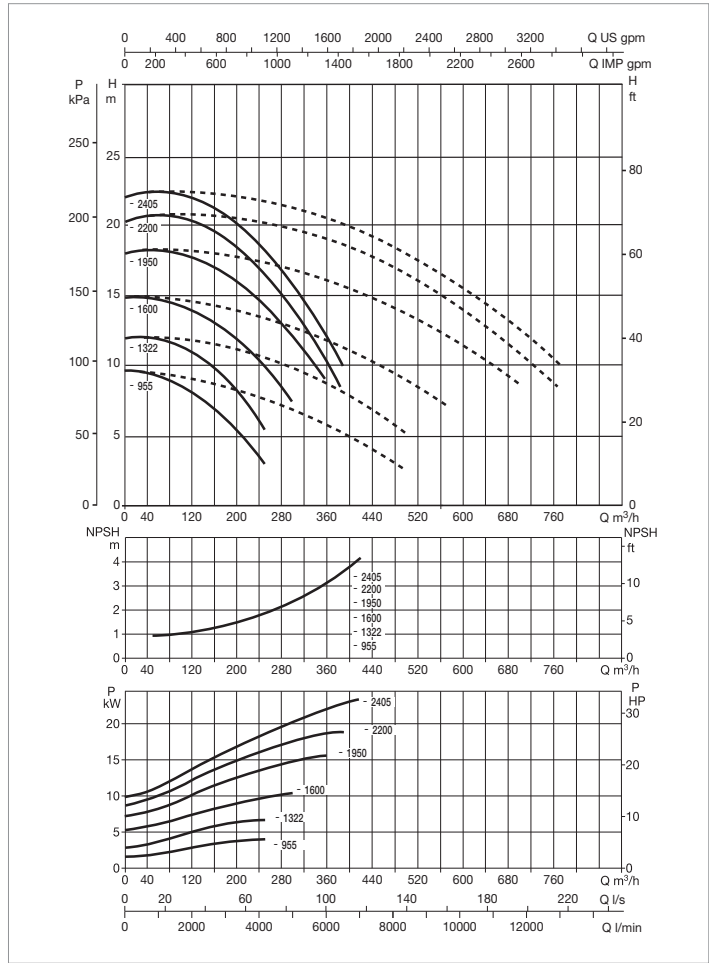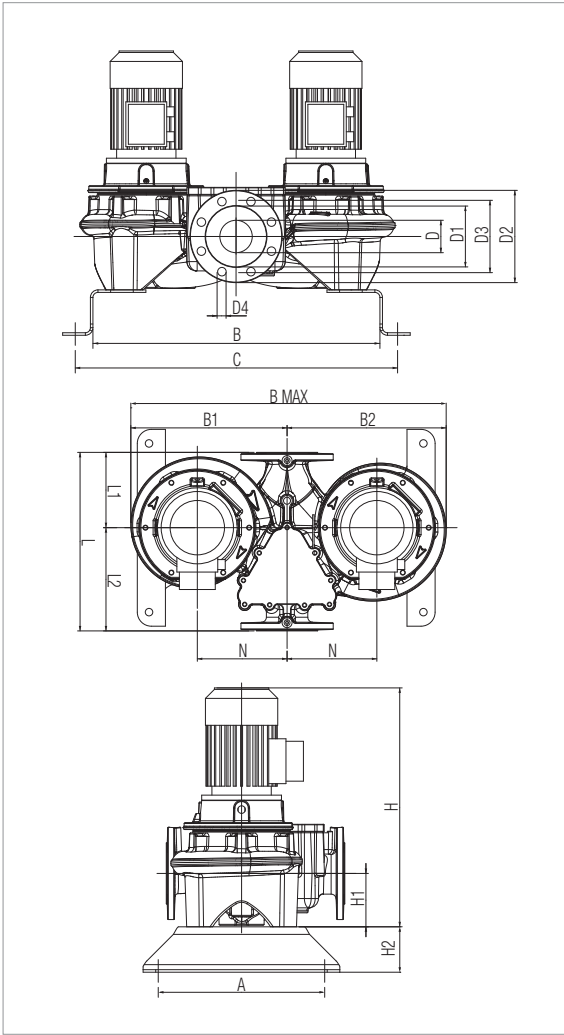

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCM-G 150-955/A/BAQE/5,5	800	DN 150	3 x 400 V ~ ¹	1462	7,5	5,5	7,5	-	10,6	IE3	MEC 132S	92,2
DCM-G 150-1322/A/BAQE/7,5	800	DN 150	3 x 400 V ~ ¹	1464	8,9	7,5	10	-	14,4	IE3	MEC 132M	124,1
DCM-G 150-1600/A/BAQE/11	800	DN 150	3 x 400 V ~ ¹	1473	13	11	15	-	22,4	IE3	MEC 160M	172,2
DCM-G 150-1950/A/BAQE/15	800	DN 150	3 x 400 V ~ ¹	1472	17,5	15	20	-	30,5	IE3	MEC 160L	232,4
DCM-G 150-2200/A/BAQE/18,5	800	DN 150	3 x 400 V ~ ¹	1472	21,1	18,5	25	-	34,3	IE3	MEC 180M	268,6
DCM-G 150-2405/A/BAQE/22	800	DN 150	3 x 400 V ~ ¹	1470	23,8	22	30	-	40,2	IE3	MEC 180L	336,1

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
																					DCM-G 150-955/A/ BAQE/5,5	500	805		
DCM-G 150-1322/A/ BAQE/7,5	500	805	550	580	1130	925	150	210	285	240	22	8	963	215	100	800	296	504	M16	300	800	1130	956	0,86	662
DCM-G 150-1600/A/ BAQE/11	500	805	550	580	1130	925	150	210	285	240	22	8	1061	215	100	800	296	504	M16	300	800	1130	1061	0,96	688
DCM-G 150-1950/A/ BAQE/15	500	805	550	580	1130	925	150	210	285	240	22	8	1104	215	100	800	296	504	M16	300	800	1130	1116	1,01	788
DCM-G 150-2200/A/ BAQE/18,5	500	805	550	580	1130	925	150	210	285	240	22	8	1136	215	100	800	296	504	M16	300	800	1130	1136	1,03	796
DCM-G 150-2405/A/ BAQE/22	500	805	550	580	1130	925	150	210	285	240	22	8	1174	215	100	800	296	504	M16	300	800	1130	1174	1,06	930

CP, CP-G / DCP, DCP-G

IN-LINE PUMPS



TECHNICAL DATA

- Operating range:** from 14,7 m³/h to 420 m³/h
- Head:** 102 m
- Pumped liquid:** clean, free of solids and abrasives, non-viscous, non-aggressive, non-crystallised and chemically neutral.
- Glycol percentage:** 30%
- Liquid temperature (range):** from -10°C to +140°C
- Maximum ambient temperature:** +40 °C (On request up to +50 °C)
- Maximum operating pressure:** 16 bar / 1600 kPa
- Flanging or threading:** flanging: DN 65, 80, 100, 125, 150 with PN 16
- Motor protection class:** IP 55
- Motor insulation class:** class F
- Impeller material:** Cast iron or technopolymer depending on model
- Single phase power input:** contact sales network
- Three phase power input:** 3x230 V 50 Hz / 3x400 V 50 Hz
- Type of installation:** Fixed in horizontal or vertical position with motor in up position. Only in vertical position for motor from 7,5 kW.
- Special executions on request:** contact sales network

CP, CP-G / DCP, DCP-G are in-line pumps designed for recirculation of water in civil and commercial applications in air conditioning and heating systems, also in the presence of solar collectors, and for circulation of domestic hot water. Available in twin versions (models with letter D).

CONSTRUCTION FEATURES OF THE PUMP

Flanged suction and delivery ports PN 10 or PN 16 with threaded connectors for control gauges. Pump body and motor support in cast iron. Cast iron or technopolymer impeller depending on model.


CONSTRUCTION FEATURES OF THE MOTOR

Three-phase two-pole asynchronous air-cooled motor. Stainless steel motor shaft.

MATERIALS

N.	PARTS*	MATERIALS
1	PUMP BODY	CAST IRON 250 UNI ISO 185
3	SUPPORT	CAST IRON 250 UNI ISO 185
4	IMPELLER	CAST IRON FOR DN 65-80-100-125-150 / DCP
7	SHAFT WITH ROTOR	AISI 304 STAINLESS STEEL X5 CrNiS 1809 UNI 6900/71
16	MECHANICAL SEAL	CARBON/GRAPHITE
28	OR RING	EPDM RUBBER


* In contact with the liquid

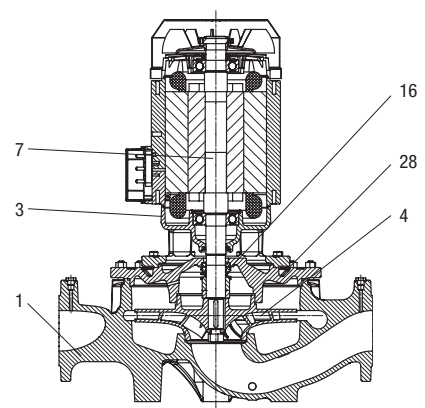



CP, CP-G / DCP, DCP-G

IN-LINE PUMPS

- Denomination index:
(example)

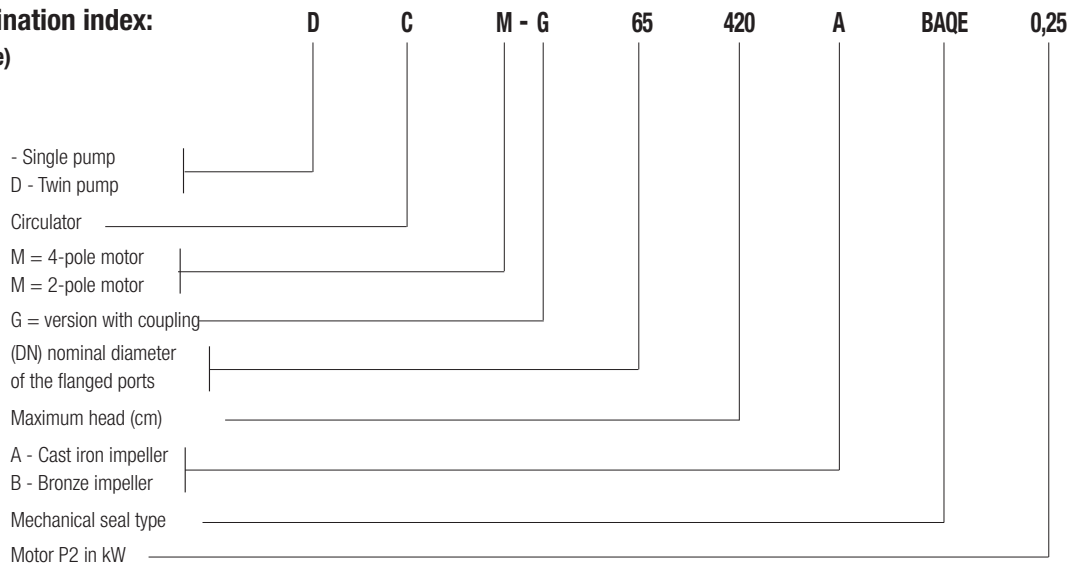

Installation: horizontal or vertical position, provided that the motor is always above the pump.
Vertical installation only for powers exceeding 7,5 kW.

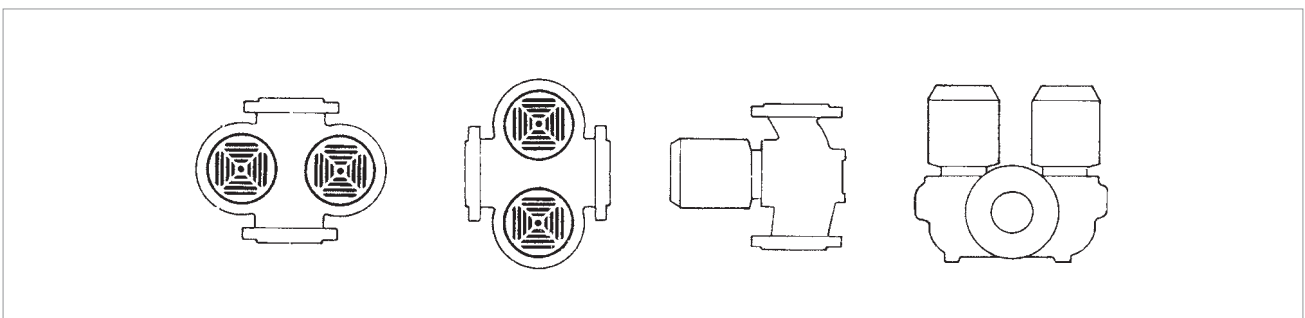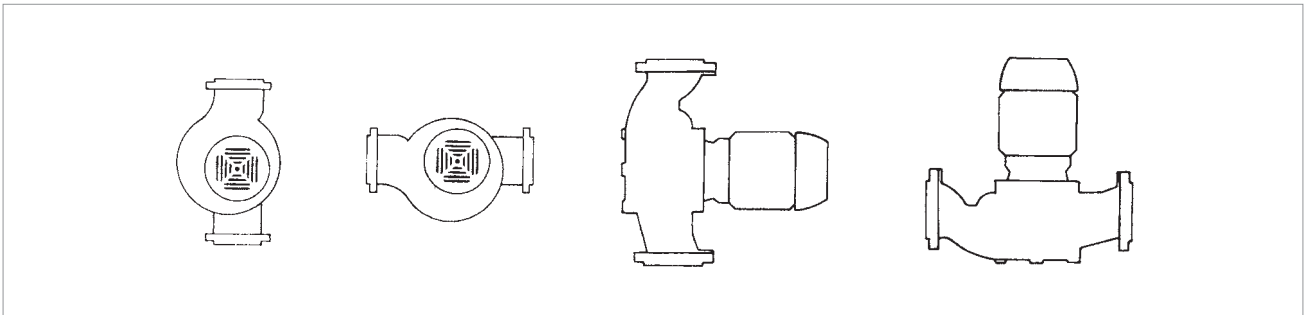


IN-LINE PUMPS

FOR CIRCULATION SYSTEMS

PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

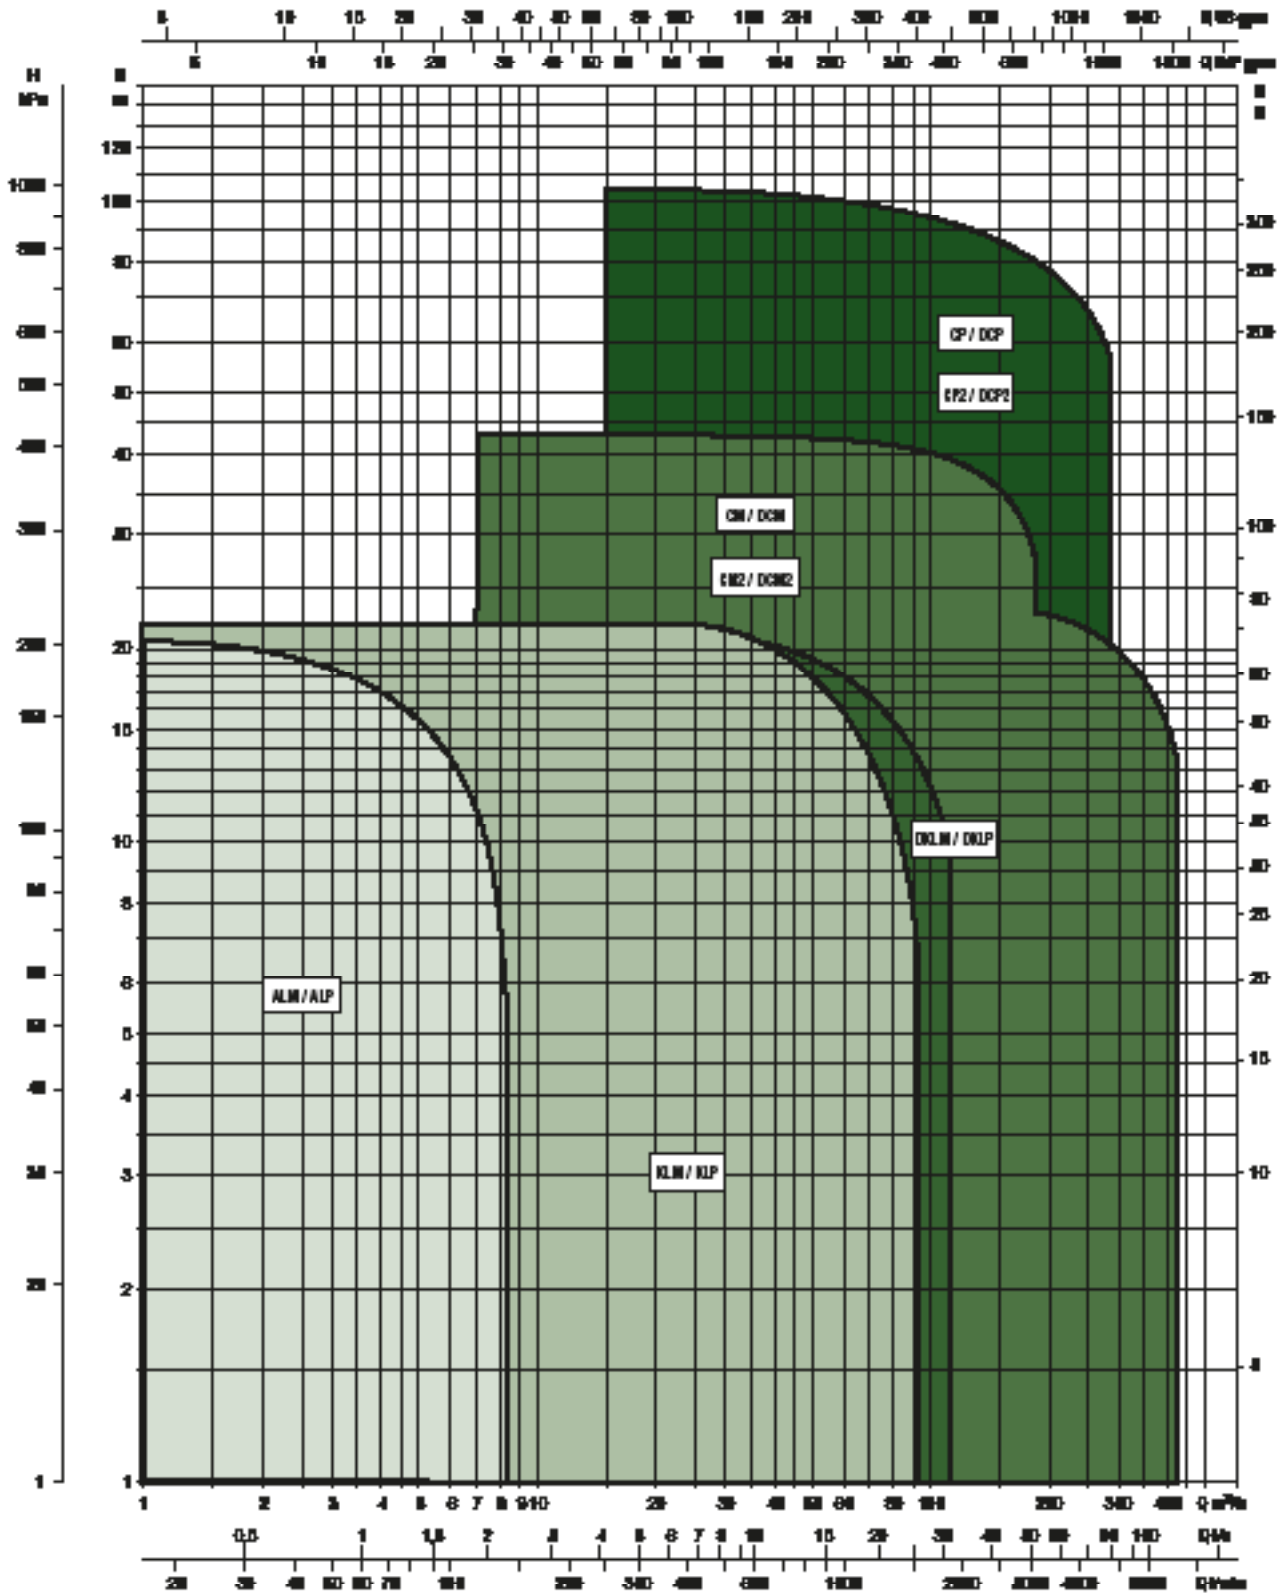

SELECTION TABLE - CP-G - 2 POLES

MODEL	Q=m ³ /h	0	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	102	114	120	150	
	Q=l/min	0	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1700	1900	2000	2500	
CP-G 65-1470/A/BAQE/1,5	H (m)	14,7	14,5	14,3	13,8	13	11,8	10,5	8,6	7												
CP-G 65-1900/A/BAQE/2,2		19	18,7	18,4	17,8	17	15,9	14,6	13	11												
CP-G 65-2280/A/BAQE/3		22,8	22,5	22,3	22	21,2	20,2	19	17,4	15,5	13,5											
CP-G 65-2640/A/BAQE/4		26,4	26,2	26	25,6	25	24	23	21,5	19,5	17,5	15										
CP-G 65-3400/A/BAQE/5,5		34			34	33,5	32,5	31	29,5	27	24											
CP-G 65-4100/A/BAQE/7,5		41			41	41	40	39	37,5	35,5	33	30	26,5									
CP-G 65-4700/A/BAQE/11		47					45,5	45	44,3	43,3	42	40,8	39	37	35	32,3						
CP-G 65-5500/A/BAQE/15		55					56	55,5	54	53,5	52	51	49	47,5	45,5	43	41					
CP-G 65-6150/A/BAQE/18,5		61,5					62	62	61,5	60,5	59	58	56,5	55	53	51	48,5	43				
CP-G 65-7350/A/BAQE/22		73,5					75	74,5	73,8	73,5	71	68,5	67	65	62,5	60	57	49				
CP-G 65-9250/A/BAQE/30		92,5					94	94	94	93	91	89,4	87,5	85,6	83	81,5	78	72				

MODEL	Q=m ³ /h	0	24	30	36	42	48	54	60	66	72	78	84	90	102	114	120	150	
	Q=l/min	0	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1700	1900	2000	2500	
CP-G 80-1400/A/BAQE/2,2	H (m)	14	13,8	13,3	12,9	12,5	12,1	11,4	10,8	10	9,2	8,3	7,5						
CP-G 80-1700/A/BAQE/3		17	16,5	16	15,5	15	14,5	13,7	13	12	11	10	9						
CP-G 80-2050/A/BAQE/4		20,5	20	19,5	19,1	18,5	18	17,5	16,5	15,8	14,8	14	12,5	11,5					
CP-G 80-2400/A/BAQE/5,5		24	23,6	23,5	23,2	22,8	22,2	21,5	21	20	19,1	18,5	17,5	16,5	13,4				
CP-G 80-2770/A/BAQE/7,5		27,7					27,5	27,3	27,1	26,7	25,8	25,6	24,9	24,5	23	21,2	20,1		
CP-G 80-3250/A/BAQE/11		32,5					32,2	32	31,8	31,3	30,2	30	29,2	28,7	27	24,8	23,6		
CP-G 80-4000/A/BAQE/15		40					40,2	40	39,8	39,5	39	38,5	38,2	37,5	36	34,5	33,5	26,9	
CP-G 80-5150/A/BAQE/18,5		51,5					52	52	51,5	50,5	50	49	48,5	47,5	45	42,5	41		
CP-G 80-5650/A/BAQE/22		56,5					58	58	57,5	57	56,5	56	55	54,5	53	51	49		
CP-G 80-6850/A/BAQE/30		68,5					70	70	70	68,5	69	68,8	68,5	67,5	66	64	63	57	
CP-G 80-8600/A/BAQE/37		86					83	82,5	82,5	82	81,5	81	80	79	76,5	73,5	72	60	
CP-G 80-9600/A/BAQE/45		96					92,5	92	92	91,5	91,5	91	90	89,5	87,5	85	83	72,5	
CP-G 80-10200/A/BAQE/55	102				101,6	101,5	101,3	101,1	100,7	100,3	99,7	99,1	98,3	97,4	95,4	92,9	91,5	83,2	

CP, CP-G / DCP, DCP-G

IN-LINE PUMPS

SELECTION TABLE - CP-G - 2 POLES

MODEL	Q =	0	36	42	48	54	60	66	72	78	84	90	102	114	120	150	180	210	240	270	300	330	360	390	420		
	m ³ h	0	600	700	800	900	1000	1100	1200	1300	1400	1500	1700	1900	2000	2500	3000	3500	4000	4500	5000	5500	6000	6500	7000		
CP-G 100-1600/A/BAQE/4	H (m)	16	15	14,6	14,2	13,7	13,3	12,8	12,3	11,7	11	10	9,3	8													
CP-G 100-1950/A/BAQE/5,5		19,5	19	18,9	18,7	18,4	18,1	17,5	17,2	16,9	16,5	15,8	14,5	13	12												
CP-G 100-2350/A/BAQE/7,5		23,5	23,1	23	22,8	22,6	22,5	22	21,6	21,1	20,7	20,2	19	17,5	14,8	12											
CP-G 100-2400/A/BAQE/11		24										22	21,4	20,4	20	17,4	16,8	12									
CP-G 100-3050/A/BAQE/15		30,5										29	28,4	27,5	27	24,5	21,3	18,3									
CP-G 100-3550/A/BAQE/18,5		35,5										34,3	33,6	32,6	32,3	29,8	26,8	23,6	20								
CP-G 100-3850/A/BAQE/22		38,5										37,2	36,8	36	35,8	33,5	30,8	27,5	24								
CP-G 100-4800/A/BAQE/30		48										48,5	48,2	47,5	47	44,7	41	36	29								
CP-G 100-5600/A/BAQE/37		56										58	57,5	57,2	57	55	52	48	43								
CP-G 100-6300/A/BAQE/45		63										65,5	65	64	63	61,9	58,9	55,5	50,6	44,2							
CP-G 100-8300/A/BAQE/55		83										83,7	83,7	83,7	83,2	80,7	77,3	72,8	66,4	59,5							

MODEL	Q =	0	36	42	48	54	60	66	72	78	84	90	102	114	120	150	180	210	240	270	300	330	360	390	420	
	m ³ h	0	600	700	800	900	1000	1100	1200	1300	1400	1500	1700	1900	2000	2500	3000	3500	4000	4500	5000	5500	6000	6500	7000	
CP-G 125-4750/A/BAQE/37	H (m)	46,5														45	44	42	39	37	34,5	31	28			
CP-G 125-5300/A/BAQE/45		51,5														51	50	48,5	46	44	42	39	35	31,5		
CP-G 125-5800/A/BAQE/55		57,5														57	56	55	53	51	49	46	43	39	36	

IN-LINE PUMPS

CP, CP-G / DCP, DCP-G

IN-LINE PUMPS

SELECTION TABLE - DCP-G - 2 POLES

MODEL	Q=m ³ h	0	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	102
	Q=l/min	0	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1700
DCP-G 65-1470/A/BAQE/1,5	H (m)	14,4	14,2	13,8	13,1	12	10,6	9	7	5,3								
DCP-G 65-1900/A/BAQE/2,2		18,6	18,3	17,8	16,9	15,7	14,2	12,5	10,5	8,3								
DCP-G 65-2280/A/BAQE/3		22,3			21,1	19,9	18,4	16,8	14,7	12,5	10,2							
DCP-G 65-2640/A/BAQE/4		25,9			24,6	23,7	22,2	20,7	18,8	16,4	14	11,4						
DCP-G 65-3400/A/BAQE/5,5		33,3			32,5	31,4	29,7	27,4	25	21,7	18,2							
DCP-G 65-4100/A/BAQE/7,5		40,2			39,6	39	37,4	35,7	33,4	30,7	27,5	23,9	20,1					
DCP-G 65-4700/A/BAQE/11		46,4					44,3	43,6	42,6	41,3	39,6	38,1	35,9	33,6	31,3	28,4		
DCP-G 65-5500/A/BAQE/15		54,3					54,7	53,9	52,1	51,2	49,4	48	45,6	43,7	41,3	38,4	36,1	
DCP-G 65-6150/A/BAQE/18,5		60,8					60,7	60,4	59,7	58,4	56,5	55,2	53,3	51,4	49	46,7	43,8	37,8
DCP-G 65-7350/A/BAQE/22		72,6					73,4	72,6	71,6	70,9	68	65,1	63,2	60,7	57,8	54,9	51,5	43,1
DCP-G 65-9250/A/BAQE/30		91,4					92	91,6	91,2	89,7	87,2	85	82,5	80	76,8	74,6	70,5	63,3

MODEL	Q=m ³ h	0	24	30	36	42	48	54	60	66	72	78	84	90	102	114	120	150
	Q=l/min	0	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1700	1900	2000	2500
DCP-G 80-1400/A/BAQE/2,2	H (m)	13,7	14,3	13,7	13	12,3	11,4	10,3	9,1	7,8	6,5	5,2	4					
DCP-G 80-1700/A/BAQE/3		16,7	17,1	16,5	15,7	14,7	13,7	12,3	11	9,4	7,8	6,2	4,8					
DCP-G 80-2050/A/BAQE/4		20,1	20,8	20,1	19,5	18,4	17,4	16,2	14,6	13,1	11,3	9,7	7,7	6,1				
DCP-G 80-2400/A/BAQE/5,5		23,5	24,5	24,4	23,9	23,1	22,1	20,8	19,6	17,9	16,3	14,8	13	11,2	7,1			
DCP-G 80-2770/A/BAQE/7,5		27,1					26,6	26	25,3	24,3	22,8	21,9	20,5	19,3	16,2	13	11,3	
DCP-G 80-3250/A/BAQE/11		31,9					31,2	30,5	29,7	28,5	26,7	25,6	24	22,6	19,1	15,2	13,2	
DCP-G 80-4000/A/BAQE/15		39,2					39,7	39,1	38,5	37,7	36,7	35,6	34,6	33,2	30,1	26,9	25,1	15,1
DCP-G 80-5150/A/BAQE/18,5		48,3					48,9	48,6	47,7	46,3	45,3	43,8	42,7	41,1	37,4	33,6	31,5	
DCP-G 80-5650/A/BAQE/22		53					54,5	54,2	53,2	52,3	51,2	50,1	48,4	47,2	44	40,3	37,7	
DCP-G 80-6850/A/BAQE/30		64,3					66,3	66,1	65,8	64,1	64,1	63,5	62,7	61,2	58,5	55,2	53,5	43,8
DCP-G 80-8600/A/BAQE/37		86,4					85,3	84,9	85,1	84,7	84,3	83,8	82,9	81,9	79,3	76,2	74,6	61,8
DCP-G 80-9600/A/BAQE/45		96,4					95,1	94,7	94,9	94,5	94,6	94,2	93,2	92,8	90,7	88,1	86	74,7
DCP-G 80-10200/A/BAQE/55		102,4			103,9	104,1	104,1	104,1	103,9	103,6	103,1	102,6	101,8	101	98,9	96,3	94,8	85,7



SELECTION TABLE - DCP-G - 2 POLES

MODEL	Q=m ³ h	0	36	42	48	54	60	66	72	78	84	90	102	114	120	150	180	210	240	270		
	Q=l/min	0	600	700	800	900	1000	1100	1200	1300	1400	1500	1700	1900	2000	2500	3000	3500	4000	4500		
DCP-G 100-1600/A/BAQE/4	H (m)	16	15,8	15,2	14,5	13,6	12,8	11,8	10,8	9,6	8,4	7,3	5,1	3								
DCP-G 100-1950/A/BAQE/5,5		19,5	20,1	19,8	19,2	18,5	17,7	16,5	15,5	14,5	13,3	11,8	9	6	4,5							
DCP-G 100-2350/A/BAQE/7,5		23,5	24,5	24,4	24	23,6	23,1	22,2	21,4	20,4	19,4	18,3	15,7	12,9	11,7	4,5						194
DCP-G 100-2400/A/BAQE/11		23,6											21,9	21	19,7	19,1	15,5	13,4	8,2			238
DCP-G 100-3050/A/BAQE/15		30											28,9	27,9	26,5	25,8	21,8	17	12,5			313
DCP-G 100-3550/A/AQE/18,5		34,9											34,6	33,5	32,1	31,6	27,8	23,3	18,5	13,7		329
DCP-G 100-3850/A/BAQE/22		37,9											37,2	36,8	36	35,8	33,5	30,8	27,5	24		402
DCP-G 100-4800/A/BAQE/30		52,7											52,1	51,6	50,7	50	47,1	42,7	37	29,3		496
DCP-G 100-5600/A/BAQE/37		61,5											62,4	61,6	61	60,7	57,9	54,1	49,3	43,5		697
DCP-G 100-6300/A/BAQE/45		68,1											70,1	69,3	67,9	66,7	62,7	57,1	49,5			1062
DCP-G 100-8300/A/BAQE/55		77,8											79	79	79	78,5	76,1	72,7	68,2	61,8		1388

MODEL	Q=m ³ h	0	150	180	210	240	270	300	330	360	390	420
	Q=l/min	0	2500	3000	3500	4000	4500	500	5500	6000	6500	7000
DCP-G 125-4750/A/BAQE/37	H (m)	46,5	44,2	42	39	36	31	26	20	17		
DCP-G 125-5300/A/BAQE/45		52,2	50,3	48,4	46	42,4	39	34	29	22,4	16	
DCP-G 125-5800/A/BAQE/55		57,5	56	54	52	50	46	42	38	33	27	22

CP-G 65 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

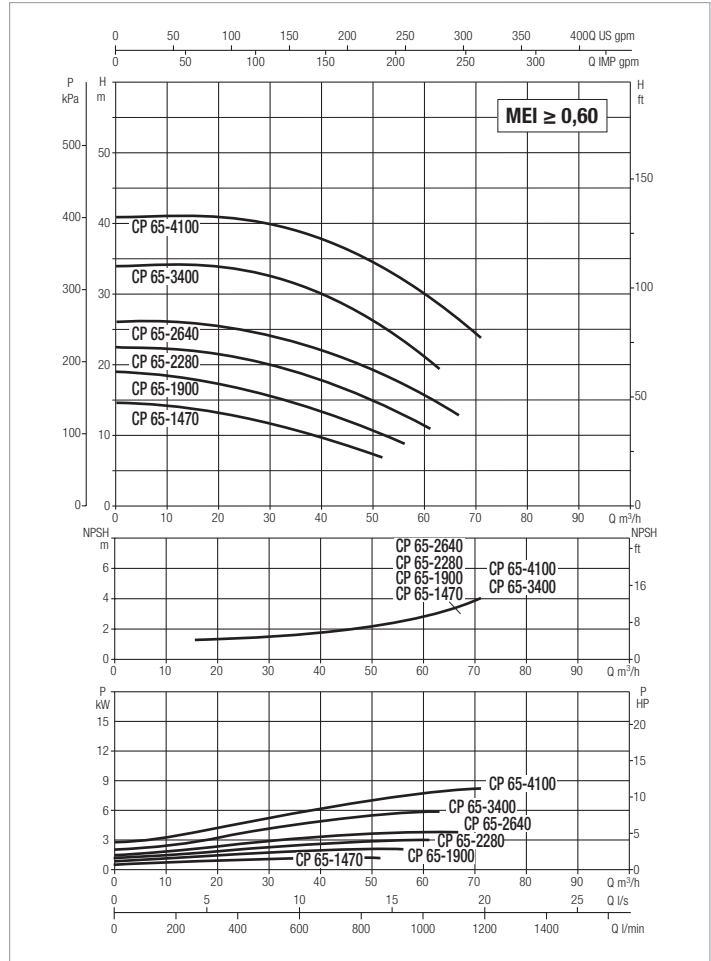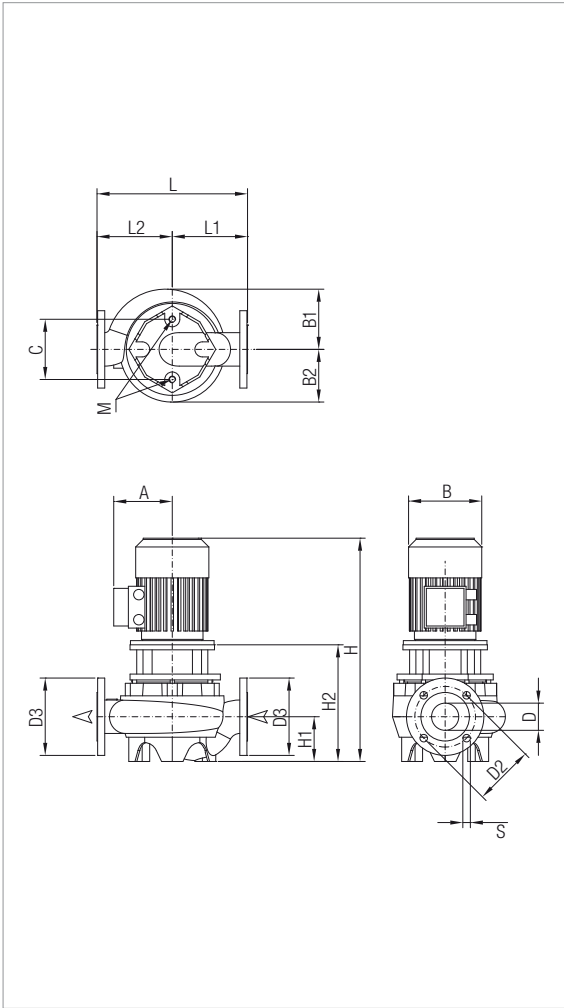

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
CP-G 65-1470/A/BAQE/1,5	360	DN 65	3x230-400 V ~	2883	1,9	1,5	2	5,2	3	IE3	MEC 90S	43,6/25,2
CP-G 65-1900/A/BAQE/2,2	360	DN 65	3x230-400 V ~	2872	3,1	2,2	3	7,97	4,6	IE3	MEC 90L	73,3/42,3
CP-G 65-2280/A/BAQE/3	360	DN 65	3 x 400 V ~ ¹	2882	3,4	3	4	-	5,6	IE3	MEC 100L	49,3
CP-G 65-2640/A/BAQE/4	360	DN 65	3 x 400 V ~ ¹	2910	4,7	4	5,5	-	8,2	IE3	MEC 112M	89,3
CP-G 65-3400/A/BAQE/5,5	360	DN 65	3 x 400 V ~ ¹	2913	6,6	5,5	7,5	-	10,2	IE3	MEC 132S	114,2
CP-G 65-4100/A/BAQE/7,5	360	DN 65	3 x 400 V ~ ¹	2900	8,6	7,5	10	-	14,4	IE3	MEC 132S	113,9

¹ star start-up possible (Δ)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CP-G 65-1470/A/BAQE/1,5	130	144	126	144	65	145	185	18	4	557	107	279	360	180	180	M16	680	430	834	0,244	57
CP-G 65-1900/A/BAQE/2,2	130	144	126	144	65	145	185	18		583	107	279	360	180	180	M16	680	430	834	0,244	58
CP-G 65-2280/A/BAQE/3	147	144	126	144	65	145	185	18		653	107	307	360	180	180	M16	680	430	834	0,244	68
CP-G 65-2640/A/BAQE/4	169	144	126	144	65	145	185	18		635	107	307	360	180	180	M16	680	430	1084	0,317	68
CP-G 65-3400/A/BAQE/5,5	188	151	151	144	65	145	185	18		716	107	346	360	180	180	M16	680	430	1084	0,317	80
CP-G 65-4100/A/BAQE/7,5	188	151	151	144	65	145	185	18		783	107	346	360	180	180	M16	680	430	1084	0,317	87

CP-G 65 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

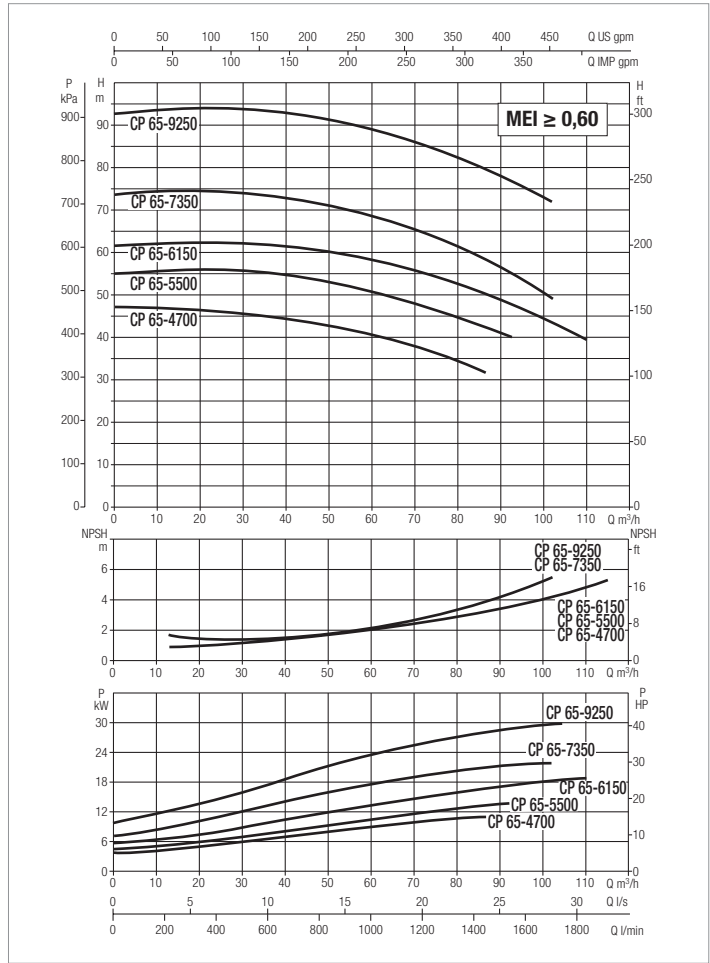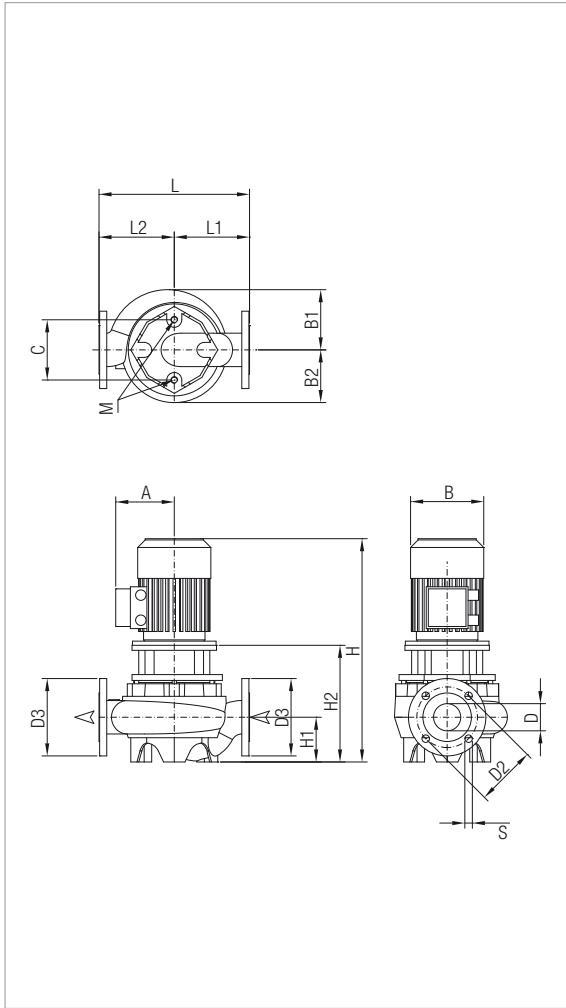

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP				
CP-G 65-4700/A/ BAQE/11	475	DN 65	3 x 400 V ~ ¹	2940	14,1	11	15	19,9	IE3	MEC 160M	147,4
CP-G 65-5500/A/ BAQE/15	475	DN 65	3 x 400 V ~ ¹	2943	17,2	15	20	26,8	IE3	MEC 160M	204
CP-G 65-6150/A/ BAQE/18,5	475	DN 65	3 x 400 V ~ ¹	2947	21,8	18,5	25	33	IE3	MEC 160L	262,4
CP-G 65-7350/A/ BAQE/22	475	DN 65	3 x 400 V ~ ¹	2961	24,1	22	30	38,1	IE3	MEC 180M	330,6
CP-G 65-9250/A/ BAQE/30	475	DN 65	3 x 400 V ~ ¹	2950	32,5	30	40	52,1	IE3	MEC 200L	468

¹ star start-up possible (Δ)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CP-G 65-4700/A/ BAQE/11	242	180	176	144	65	145	185	18	4	893	215	388	475	237,5	237,5	M16	1200	720	720	0,622	198
CP-G 65-5500/A/ BAQE/15	242	180	176	144	65	145	185	18		893	215	388	475	237,5	237,5	M16	1200	720	720	0,622	194
CP-G 65-6150/A/ BAQE/18,5	242	180	176	144	65	145	185	18		937	215	388	475	237,5	237,5	M16	1200	720	720	0,622	198
CP-G 65-7350/A/ BAQE/22	260	190	190	144	65	145	185	18		968	215	388	475	237,5	237,5	M16	1200	720	720	0,622	232
CP-G 65-9250/A/ BAQE/30	292	210	210	144	65	145	185	18		1058	215	388	475	237,5	237,5	M16	1200	720	720	0,622	310

CP-G 80 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

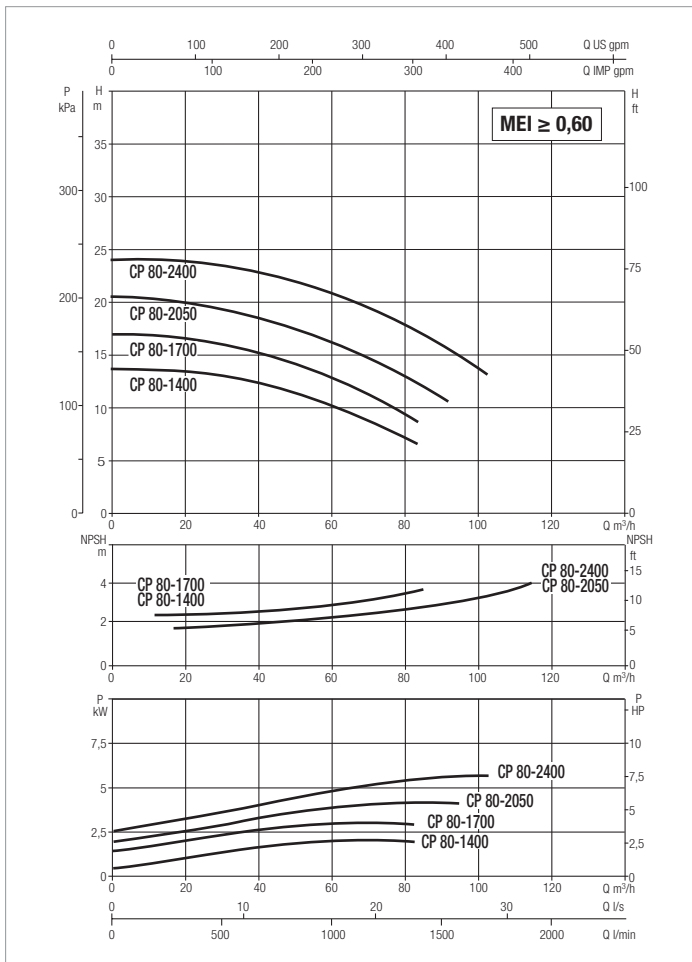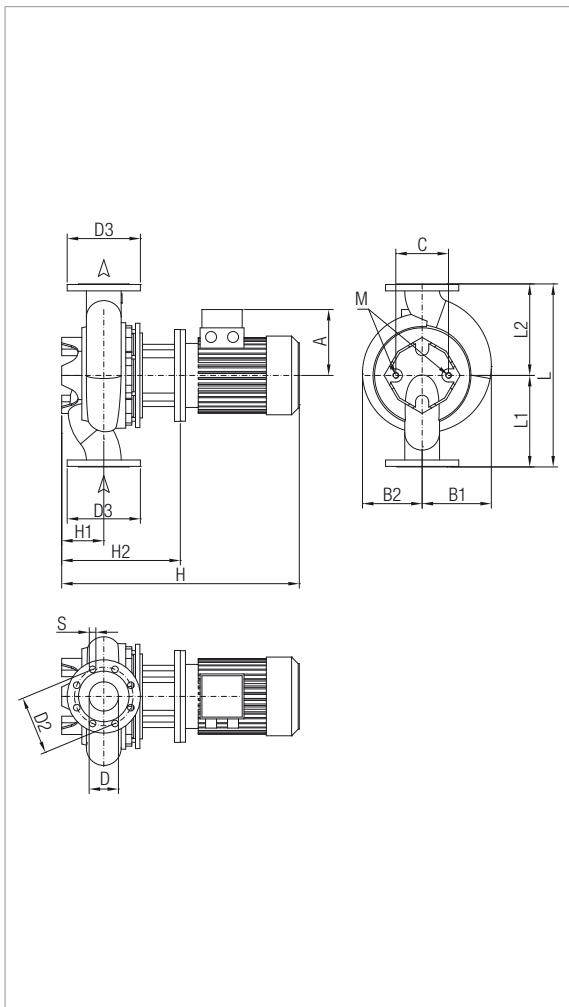

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
CP-G 80-1400/A/BAQE/2,2	360	DN 80	3x230-400 V ~	2874	3	2,2	3	7,97	4,6	IE3	MEC 90L	73,3/42,3
CP-G 80-1700/A/BAQE/3	360	DN 80	3 x 400 V ~ ¹	2880	3,5	3	4	-	5,6	IE3	MEC 100L	49,3
CP-G 80-2050/A/BAQE/4	360	DN 80	3 x 400 V ~ ¹	2914	5	4	5,5	-	8,2	IE3	MEC 112M	89,3
CP-G 80-2400/A/BAQE/5,5	360	DN 80	3 x 400 V ~ ¹	2910	6,4	5,5	7,5	-	10,2	IE3	MEC 132S	114,2

¹ star start-up possible (Δ)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
																	CP-G 80-1400/A/ BAQE/2,2	130	135		
CP-G 80-1700/A/ BAQE/3	147	135	125	144	80	160	200	18	655	105	309	360	180	180	M16	680	430	834	0,244	71	
CP-G 80-2050/A/ BAQE/4	169	135	125	144	80	160	200	18	637	105	309	360	180	180	M16	680	430	1084	0,317	71	
CP-G 80-2400/A/ BAQE/5,5	188	135	151	144	80	160	200	18	718	105	348	360	180	180	M16	680	430	1084	0,317	83	

CP-G 80 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

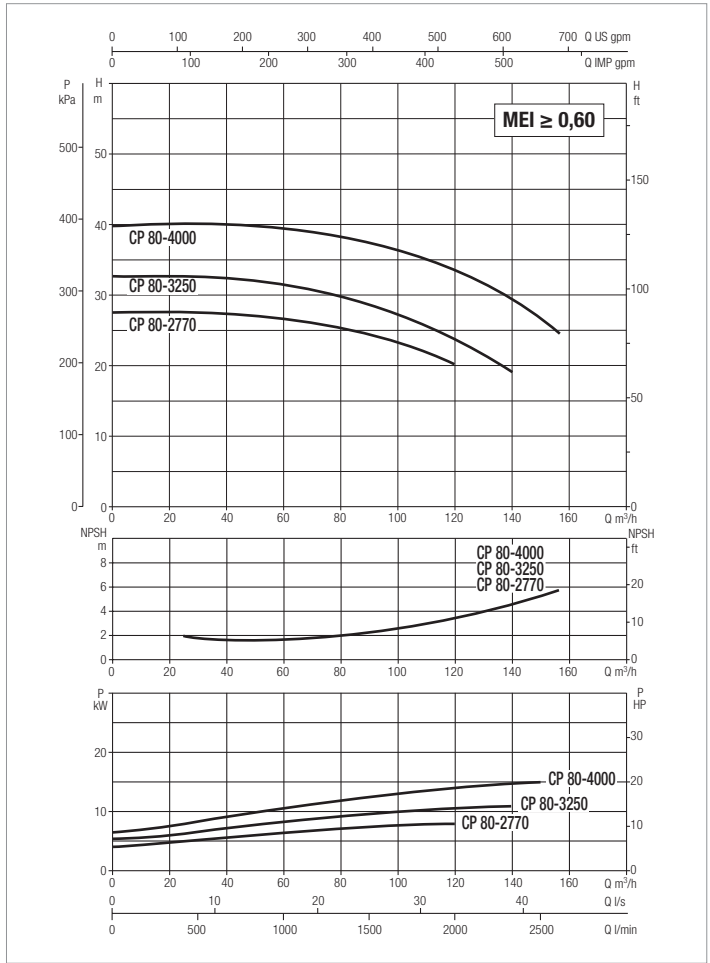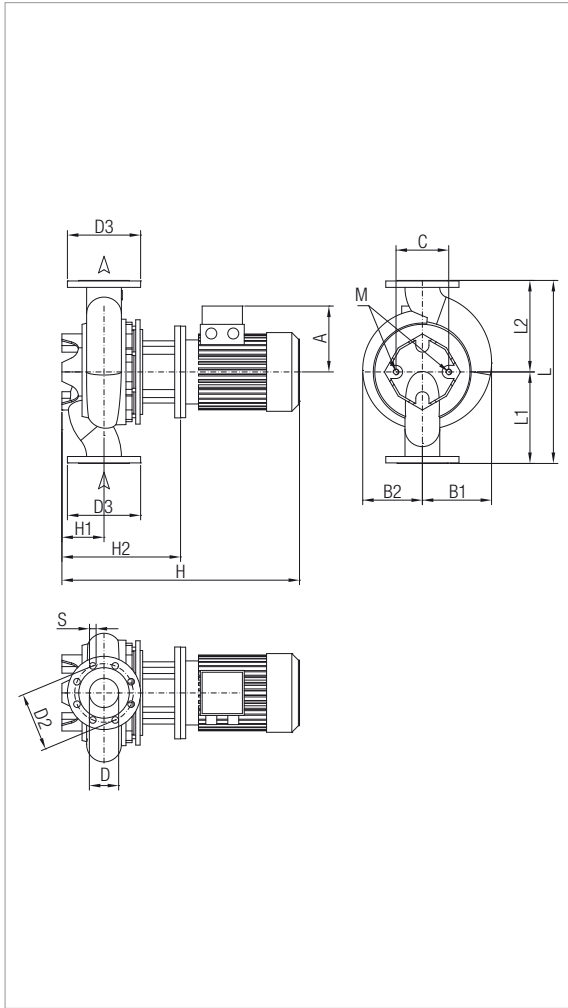

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
CP-G 80-2770/A/BAQE/7,5	440	DN 80	3 x 400 V ~ ¹	2905	9,2	7,5	10	14,4	IE3	MEC 132S	113,9
CP-G 80-3250/A/BAQE/11	440	DN 80	3 x 400 V ~ ¹	2932	12,7	11	15	19,9	IE3	MEC 160M	147,4
CP-G 80-4000/A/BAQE/15	440	DN 80	3 x 400 V ~ ¹	2945	17,5	15	20	26,8	IE3	MEC 160M	204

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CP-G 80-2770/A/ BAQE/7,5	188	178	151	144	80	160	200	18	8	795	115	358	440	220	220	M16	680	430	1084	0,317	91
CP-G 80-3250/A/ BAQE/11	242	178	176	144	80	160	200	18		893	115	388	440	220	220	M16	1200	720	720	0,622	196
CP-G 80-4000/A/ BAQE/15	242	178	176	144	80	160	200	18		893	115	388	440	220	220	M16	1200	720	720	0,622	167

CP-G 80 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

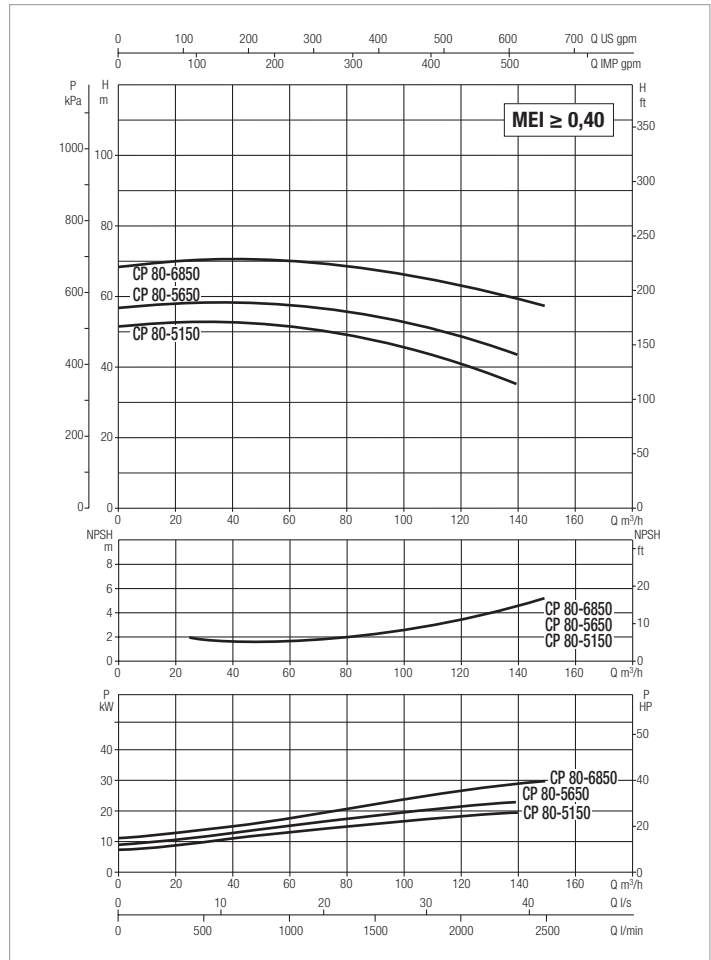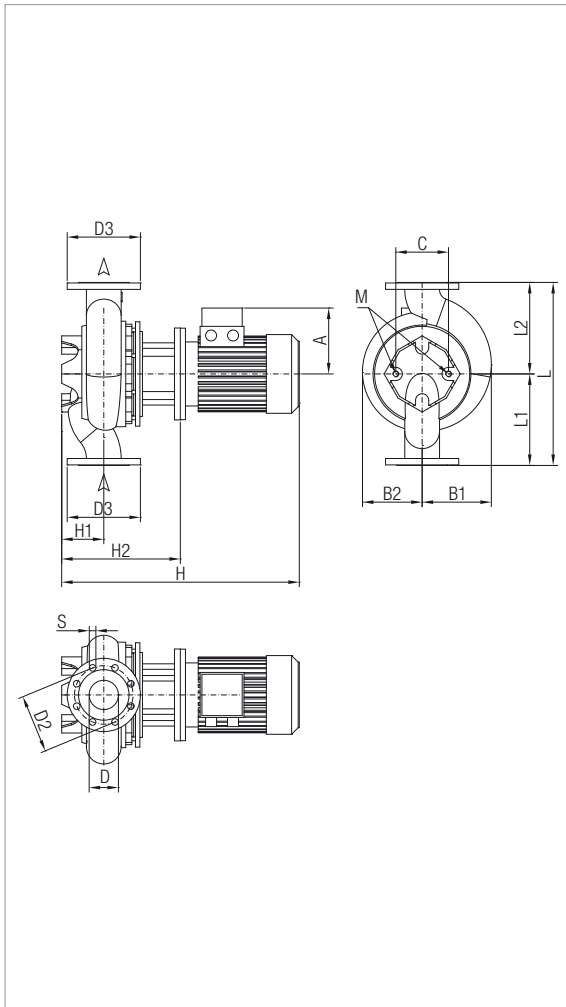

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP				
CP-G 80-5150/A/BAQE/18,5	500	DN 80	3 x 400 V ~ ¹	2943	21	18,5	25	33	IE3	MEC 160L	262,4
CP-G 80-5650/A/BAQE/22	500	DN 80	3 x 400 V ~ ¹	2967	25,3	22	30	38,1	IE3	MEC 180M	330,6
CP-G 80-6850/A/BAQE/30	500	DN 80	3 x 400 V ~ ¹	2951	32,8	30	40	52,1	IE3	MEC 200L	468

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CP-G 80-5150/A/ BAQE/18,5	242	178	176	144	80	160	200	18	8	937	115	388	440	220	220	M16	1200	720	720	0,622	121
CP-G 80-5650/A/ BAQE/22	260	190	190	144	80	160	200	18		968	115	388	500	250	250	M16	1200	720	720	0,622	124
CP-G 80-6850/A/ BAQE/30	292	210	210	144	80	160	200	18		1050	115	380	500	250	250	M16	1200	720	720	0,622	314

CP-G 80 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

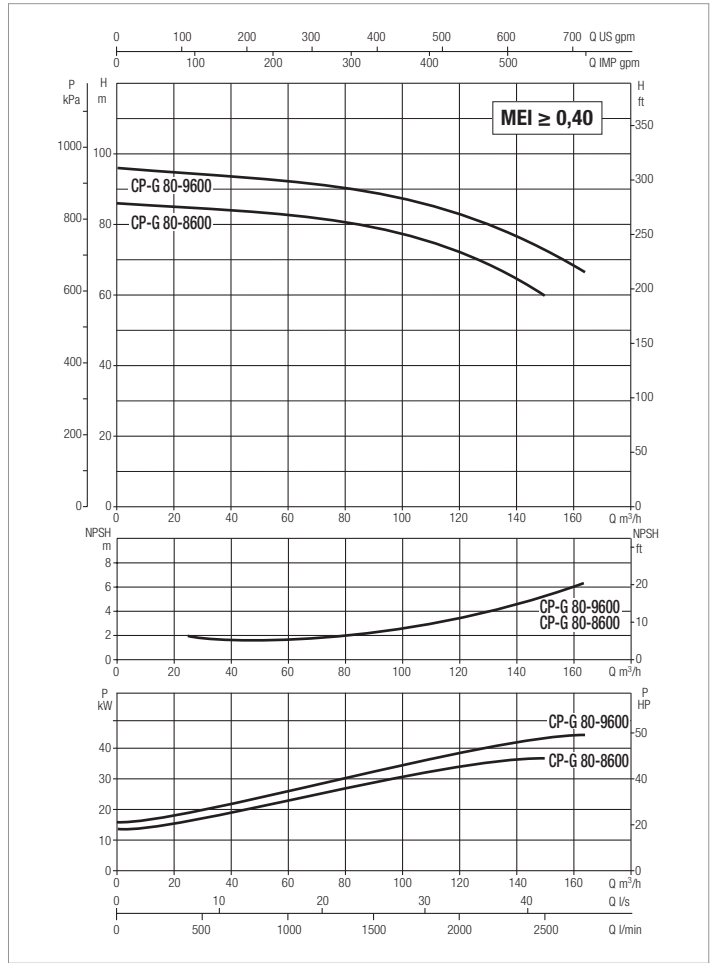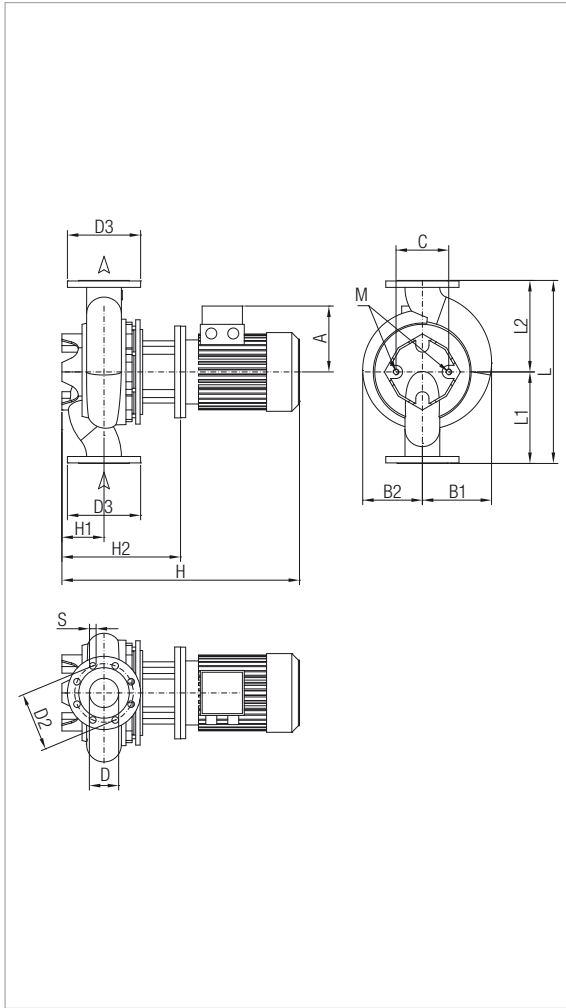

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP				
CP-G 80-8600/A/BAQE/37	620	DN 80	3 x 400 V ~ ¹	2967	41,9	37	50	62,6	IE3	MEC 200L	567
CP-G 80-9600/A/BAQE/45	620	DN 80	3 x 400 V ~ ¹	2966	51,2	45	60	78,4	IE3	MEC 225M	630,8

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CP-G 80-8600/A/ BAQE/37	292	245	225	230	80	160	200	18	8	1113	140	445	620	310	310	M16	1200	720	720	0,622	424
CP-G 80-9600/ A/BAQE/45	315	245	232	230	80	160	200	18		1158	140	445	620	310	310	M16	1200	720	720	0,622	347

CP-G 80 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

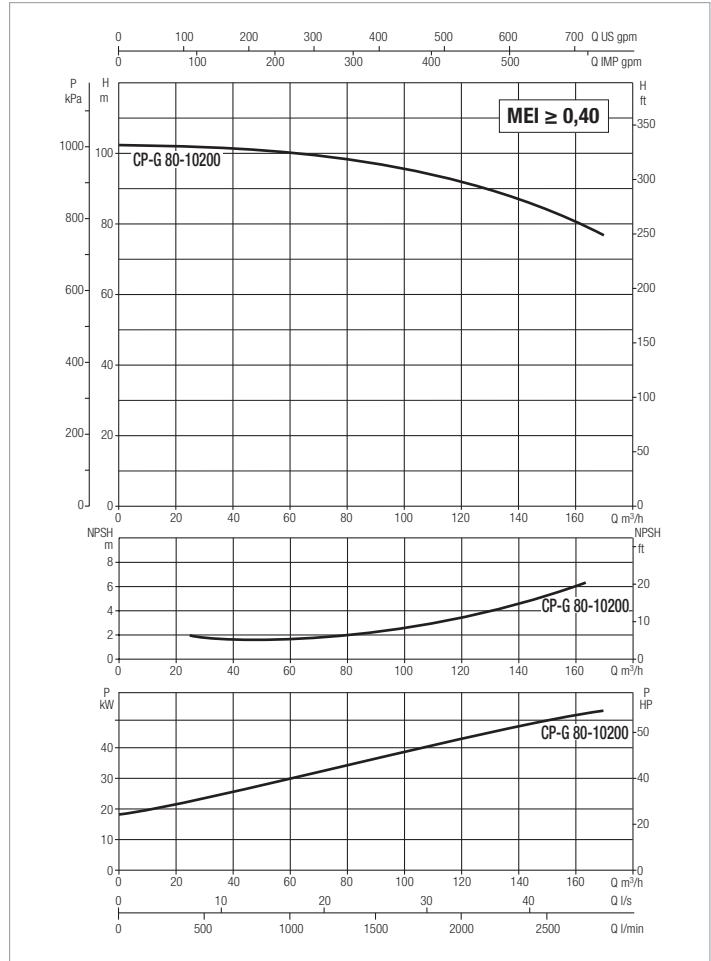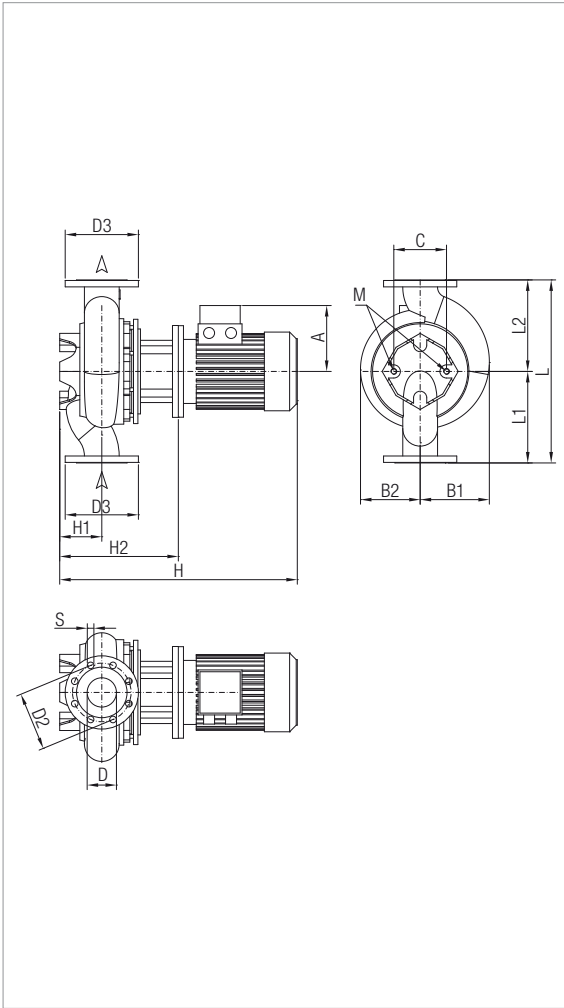

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
CP-G 80-10200/A/BAQE/55	620	DN 80	3 x 400 V ~ ¹	2979	63,2	55	75	94,6	IE3	MEC 250M	684

¹ star start-up possible (Δ)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CP-G 80-10200/ A/BAQE/55	372	275	275	230	80	160	200	18	8	1248	140	473	620	310	310	M16	2550	1300	1300	4,31	621

CP-G 100 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

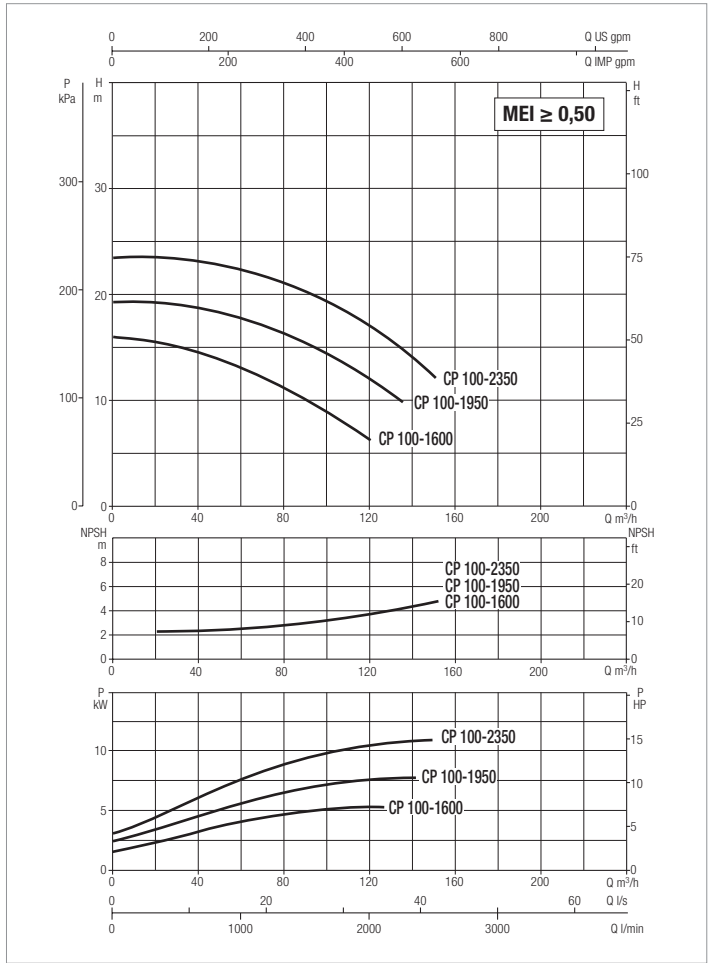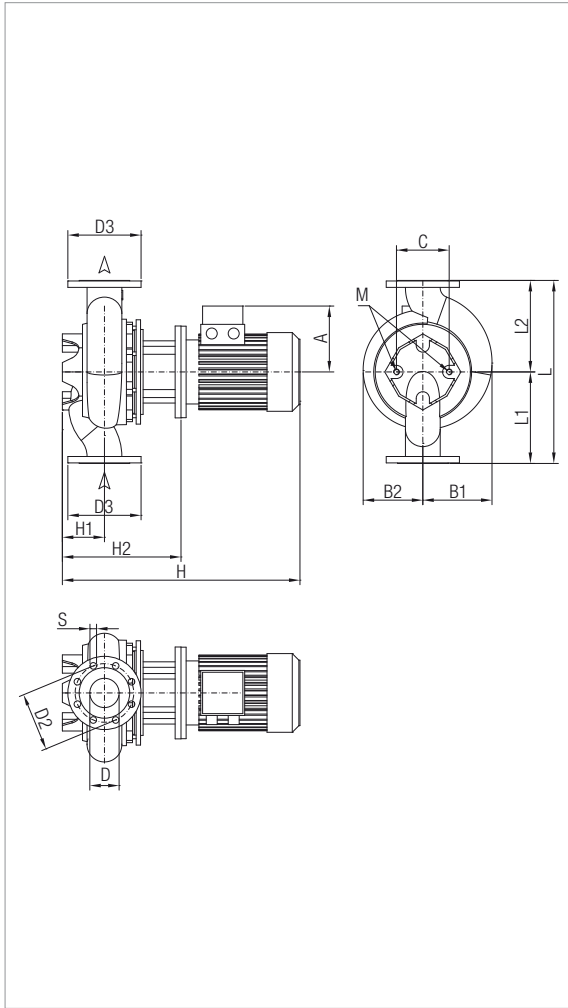

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A	
			3 x 400 V ~ ¹			kW	kW	HP				
CP-G 100-1600/A/BAQE/4	500	DN 100	3 x 400 V ~ ¹	2918	5,3	4	5,5	8,2	IE3	MEC 112M	89,3	
CP-G 100-1950/ A/BAQE/5,5	500	DN 100	3 x 400 V ~ ¹	2918	7	5,5	7,5	10,2	IE3	MEC 132S	114,2	
CP-G 100-2350/ A/BAQE/7,5	500	DN 100	3 x 400 V ~ ¹	2906	9,2	7,5	10	14,4	IE3	MEC 132S	113,9	

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CP-G 100-1600/A/BAQE/4	169	156	126	144	100	180	220	18	8	674	140	346	500	250	250	M16	1200	720	720	0,622	64
CP-G 100-1950/ A/BAQE/5,5	169	158	150	144	100	180	220	18		775	140	385	500	250	250	M16	1200	720	720	0,622	102
CP-G 100-2350/ A/BAQE/7,5	188	158	150	144	100	180	220	18		822	140	385	500	250	250	M16	1200	720	720	0,622	89

CP-G 100 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

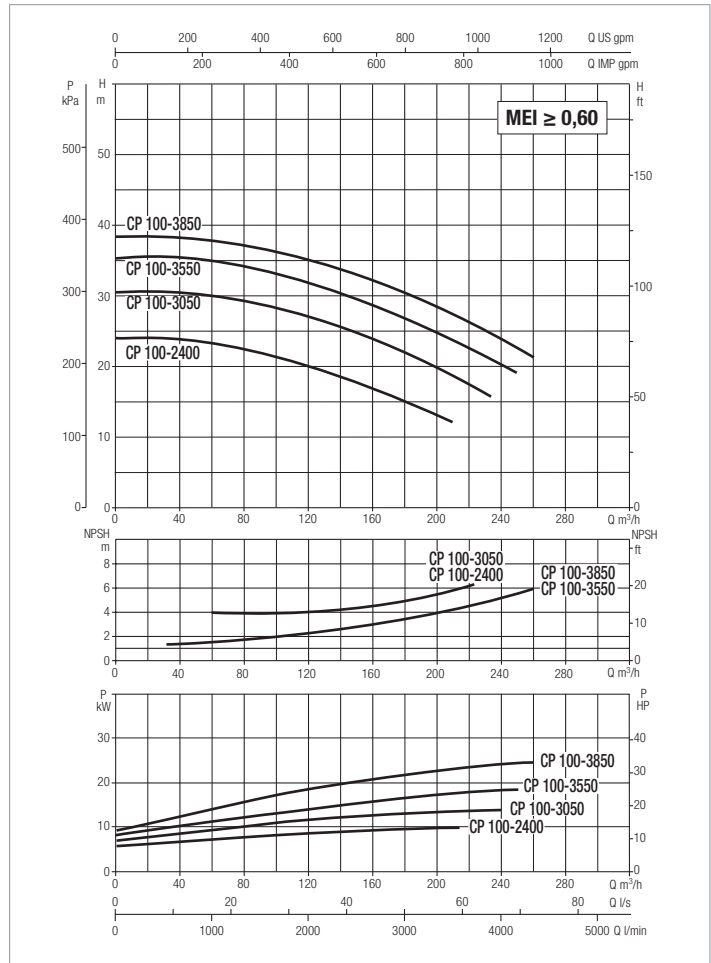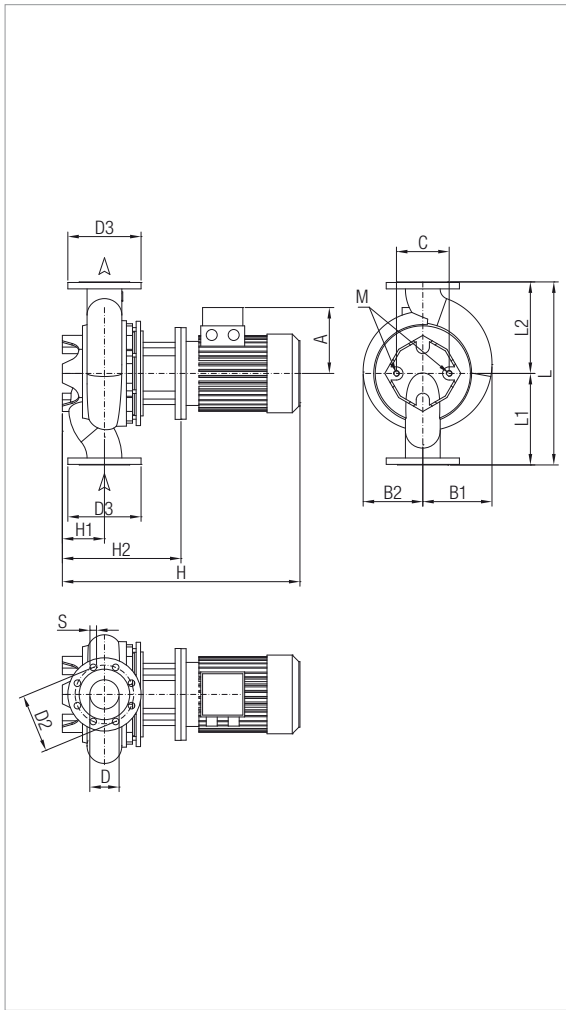

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
CP-G 100-2400/A/BAQE/11	550	DN 100	3 x 400 V ~ ¹	2940	13,9	11	15	19,9	IE3	MEC 160M	147,4
CP-G 100-3050/A/BAQE/15	550	DN 100	3 x 400 V ~ ¹	2941	16,9	15	20	26,8	IE3	MEC 160M	204
CP-G 100-3550/ A/BAQE/18,5	550	DN 100	3 x 400 V ~ ¹	2948	21,9	18,5	25	33	IE3	MEC 160L	262,4
CP-G 100-3850/A/BAQE/22	550	DN 100	3 x 400 V ~ ¹	2973	26,5	22	30	38,1	IE3	MEC 180M	330,6

¹ star start-up possible (Δ)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CP-G 100-2400/A/BAQE/11	242	193	176	144	100	180	220	18	8	915	140	410	550	275	275	M16	1200	720	720	0,622	127
CP-G 100-3050/A/BAQE/15	242	193	176	144	100	180	220	18		915	140	410	550	275	275	M16	1200	720	720	0,622	150
CP-G 100-3550/ A/BAQE/18,5	242	193	176	144	100	180	220	18		959	140	410	550	275	275	M16	1200	720	720	0,622	146
CP-G 100-3850/A/BAQE/22	260	192	190	230	100	180	220	18		990	140	410	550	275	275	M16	1200	720	720	0,622	259

CP-G 100 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

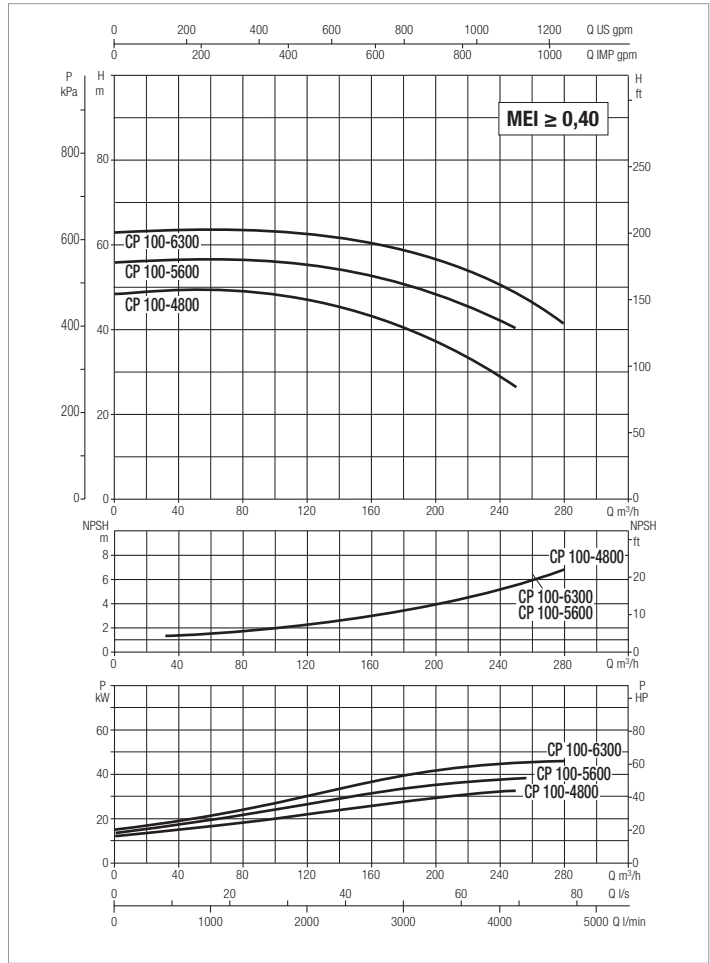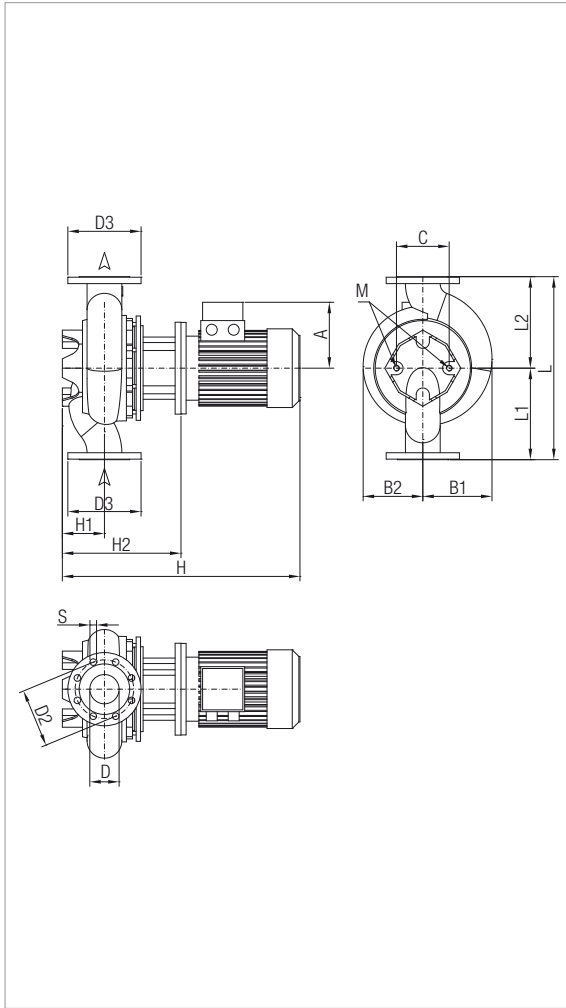

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						KW	HP				
CP-G 100-4800/A/BAQE/30	550	DN 100	3 x 400 V ~ ¹	2966	39,2	30	40	52,1	IE3	MEC 200L	468
CP-G 100-5600/A/BAQE/37	550	DN 100	3 x 400 V ~ ¹	2975	45	37	50	62,6	IE3	MEC 200L	567
CP-G 100-6300/A/BAQE/45	550	DN 100	3 x 400 V ~ ¹	2975	55,9	45	60	78,4	IE3	MEC 225M	630,8

¹ star start-up possible (Δ)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CP-G 100-4800/A/BAQE/30	292	210	210	230	100	180	220	18	8	1117	140	447	550	275	275	M16	1200	720	720	0,622	337
CP-G 100-5600/A/BAQE/37	292	210	210	230	100	180	220	18		1117	140	447	550	275	275	M16	1200	720	720	0,622	397
CP-G 100-6300/A/BAQE/45	315	235	235	230	100	180	220	18		1162	140	447	550	275	275	M16	1200	720	720	0,622	470

CP-G 100 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

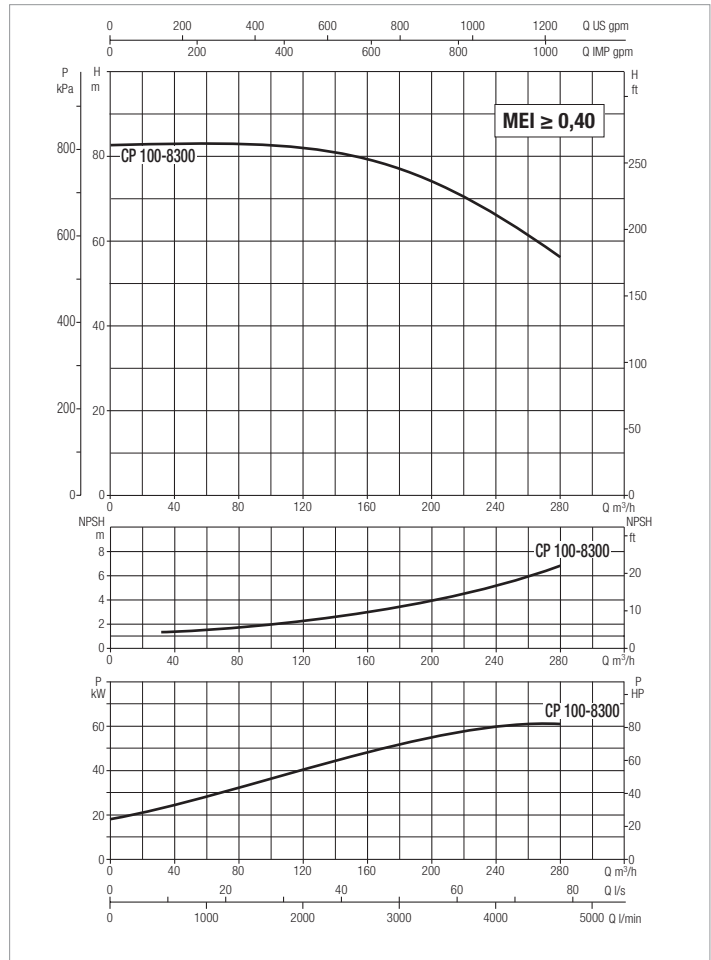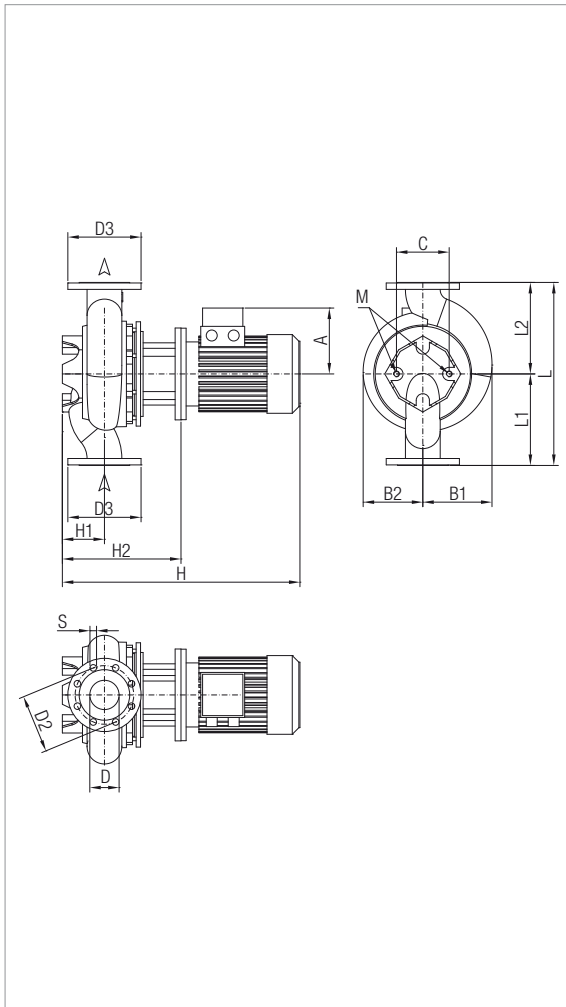

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
CP-G 100-8300/A/BAQE/55	670	DN 100	3 x 400 V ~ ¹	2981	70,1	55	75	94,6	IE3	MEC 250M	684

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CP-G 100-8300/A/BAQE/55	372	293	275	230	100	180	220	18	8	1288	175	513	670	335	335	M16	1500	760	725	0,827	627

CP-G 125 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

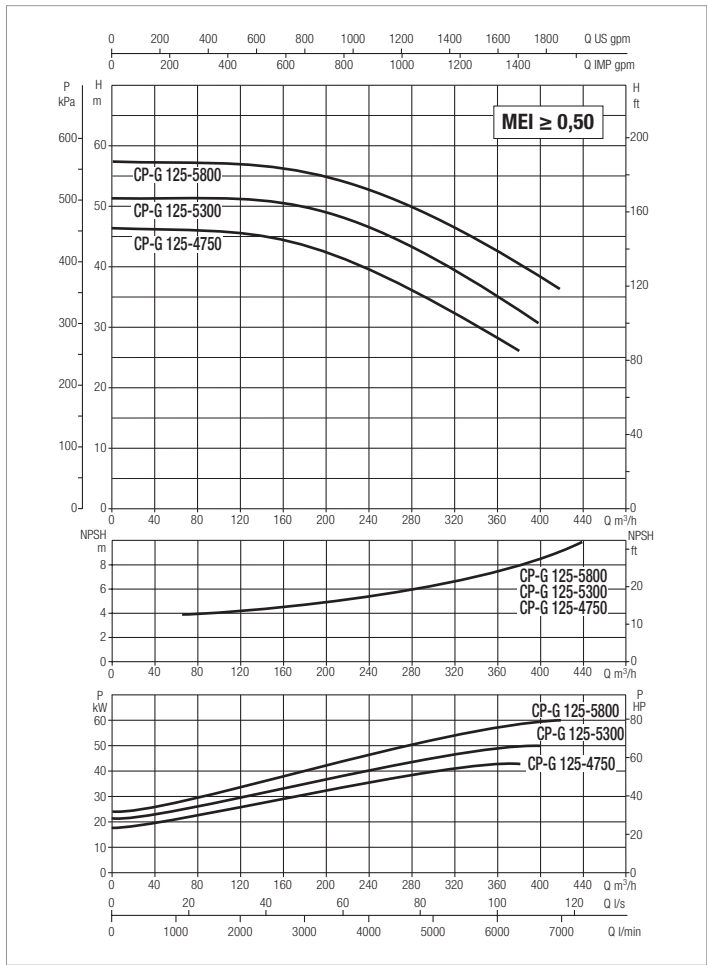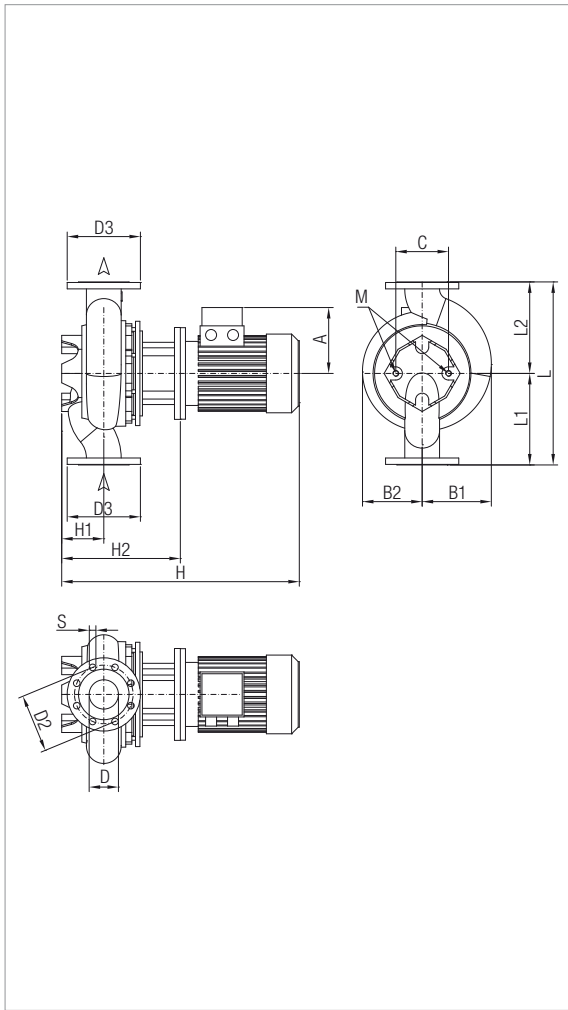

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
CP-G 125-4750/A/BAQE/37	620	DN 125	3 x 400 V ~ ¹	2975	44,7	37	50	62,6	IE3	MEC 200L	567
CP-G 125-5300/A/BAQE/45	620	DN 125	3 x 400 V ~ ¹	2973	53,9	45	60	78,4	IE3	MEC 225M	630,8
CP-G 125-5800/A/BAQE/55	620	DN 125	3 x 400 V ~ ¹	2985	68,2	55	75	94,6	IE3	MEC 250M	684

¹ star start-up possible (A)

MODEL	A	B1	B2	C	D	D2	D3	S	no. of holes	H	H1	H2	L	L1	L2	M	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																	L/A	L/B	H		
CP-G 125-4750/A/BAQE/37	292	252	210	230	125	210	250	18	8	1198	215	528	620	310	310	M16	1125	680	1300	0,995	444
CP-G 125-5300/A/BAQE/45	315	252	235	230	125	210	250	18		1243	215	528	620	310	310	M16	760	725	1500	0,827	507
CP-G 125-5800/A/BAQE/55	372	275	275	230	125	210	250	18		1333	215	558	620	310	310	M16	760	725	1500	0,827	539

DCP-G 65 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

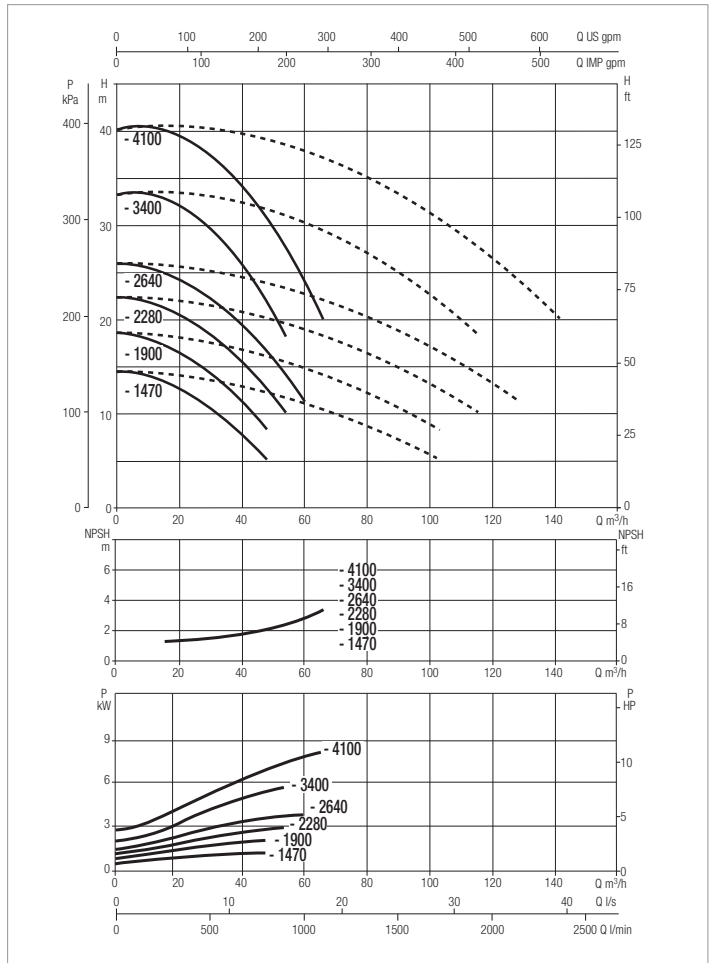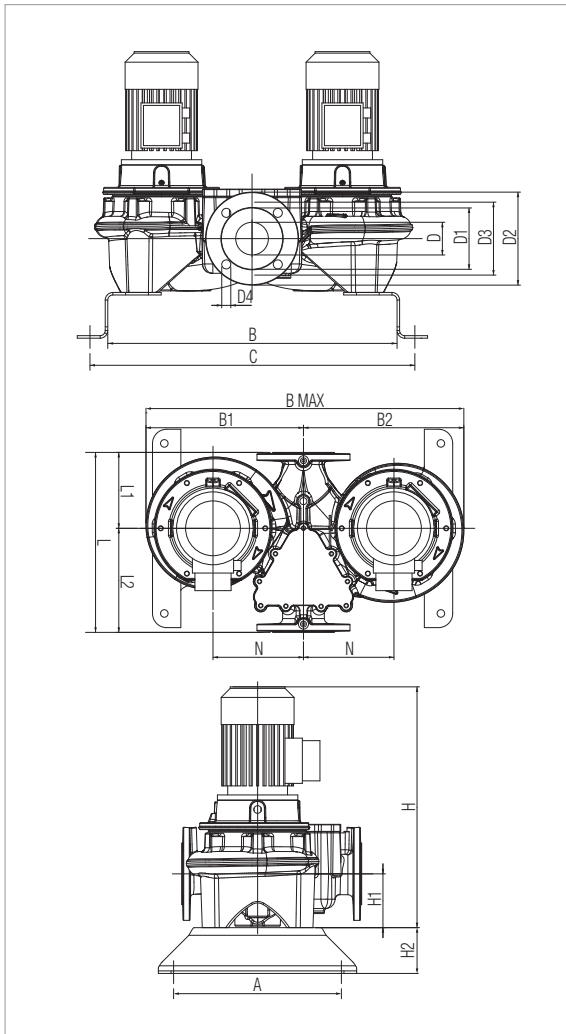

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCP-G 65-1470/A/ BAQE/1,5	360	DN 65	3x230-400 V ~	2883	1,9	1,5	2	5,2	3	IE3	MEC90S	43,7/25,2
DCP-G 65-1900/A/ BAQE/2,2	360	DN 65	3x230-400 V ~	2872	3,1	2,2	3	7,97	4,6	IE3	MEC90L	73,3/42,3
DCP-G 65-2280/A/ BAQE/3	360	DN 65	3 x 400 V ~ ¹	2882	3,4	3	4	-	5,6	IE3	MEC100L	49,3
DCP-G 65-2640/A/ BAQE/4	360	DN 65	3 x 400 V ~ ¹	2910	4,7	4	5,5	-	8,2	IE3	MEC112M	89,4
DCP-G 65-3400/A/ BAQE/5,5	360	DN 65	3 x 400 V ~ ¹	2913	6,6	5,5	7,5	-	10,2	IE3	MEC132S	114,2
DCP-G 65-4100/A/ BAQE/7,5	360	DN 65	3 x 400 V ~ ¹	2900	8,7	7,5	10	-	14,4	IE3	MEC132S	113,9

¹ star start-up possible (Δ)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m³)	WEIGHT Kg
																					L/A	L/B	H		
																					DCP-G 65-1470/A/ BAQE/1,5	330	569		
DCP-G 65-1900/A/ BAQE/2,2	330	569	315	320	635	639	65	122	185	145	18	583	107	100	358	151	207	M16	180	358	635	574	0,13	140	
DCP-G 65-2280/A/ BAQE/3	330	569	315	320	635	639	65	122	185	145	18	653	107	100	358	151	207	M16	180	358	635	632	0,14	167	
DCP-G 65-2640/A/ BAQE/4	330	569	315	320	635	639	65	122	185	145	18	635	107	100	358	151	207	M16	180	358	635	647	0,15	151	
DCP-G 65-3400/A/ BAQE/5,5	330	569	324	329	635	639	65	122	185	145	18	716	107	100	358	151	207	M16	180	358	635	736	0,17	202	
DCP-G 65-4100/A/ BAQE/7,5	330	569	324	329	653	639	65	122	185	145	18	783	107	100	358	151	207	M17	180	358	653	736	0,17	248	

DCP-G 65 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

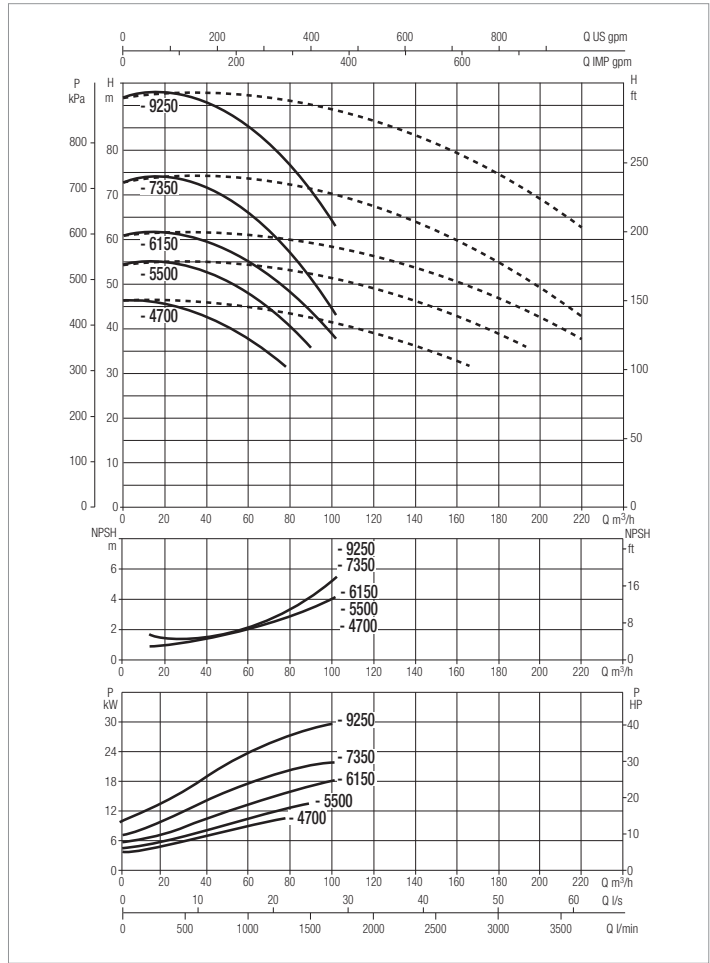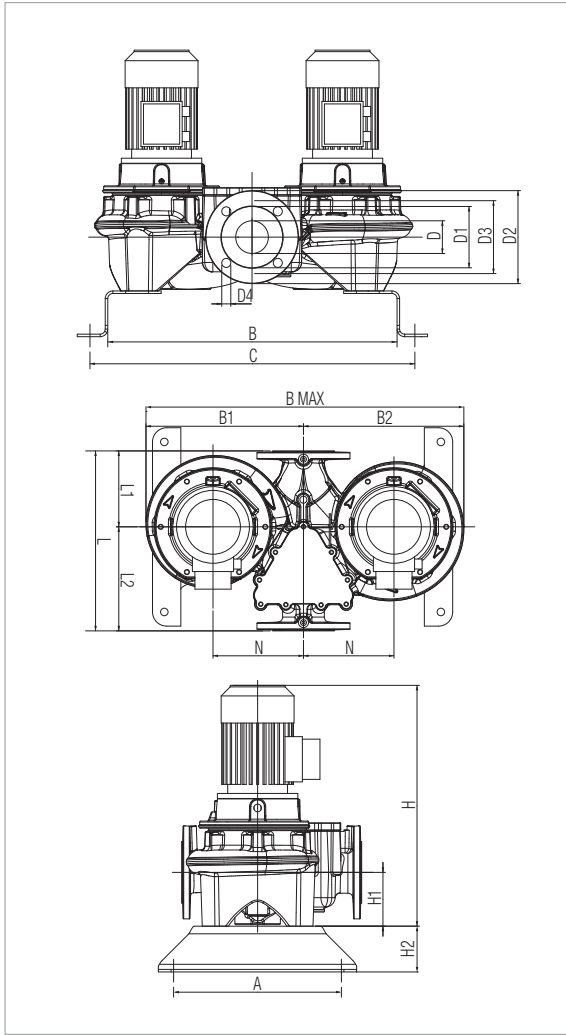

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						KW	HP				
DCP-G 65-4700/A/ BAQE/11	475	DN 65	3 x 400 V ~ ¹	2940	14,1	11	15	19,9	IE3	MEC160M	147,4
DCP-G 65-5500/A/ BAQE/15	475	DN 65	3 x 400 V ~ ¹	2943	17,2	15	20	26,8	IE3	MEC160M	204
DCP-G 65-6150/A/ BAQE/18,5	475	DN 65	3 x 400 V ~ ¹	2947	21,8	18,5	25	33	IE3	MEC160L	262,4
DCP-G 65-7350/A/ BAQE/22	475	DN 65	3 x 400 V ~ ¹	2961	24,1	22	30	38,1	IE3	MEC180M	330,6
DCP-G 65-9250/A/ BAQE/30	475	DN 65	3 x 400 V ~ ¹	2950	32,5	30	40	52,1	IE3	MEC200L	468

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCP-G 65-4700/A/BAQE/11	330	649	389	397	786	719	65	122	185	145	18	4	895	125	100	475	177	298	M16	220	475	786	895	0,33	388
DCP-G 65-5500/A/BAQE/15	330	649	389	397	786	719	65	122	185	145	18		895	125	100	475	177	298	M16	220	475	786	895	0,33	420
DCP-G 65-6150/A/BAQE/18,5	330	649	389	397	786	719	65	122	185	145	18		939	125	100	475	177	298	M16	220	475	786	950	0,35	450
DCP-G 65-7350/A/BAQE/22	330	649	389	397	786	719	65	122	185	145	18		970	125	100	475	177	298	M16	220	475	786	970	0,36	521
DCP-G 65-9250/A/BAQE/30	330	649	414	422	836	719	65	122	185	145	18		1000	125	100	475	177	298	M16	220	475	836	990	0,39	745

DCP-G 80 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

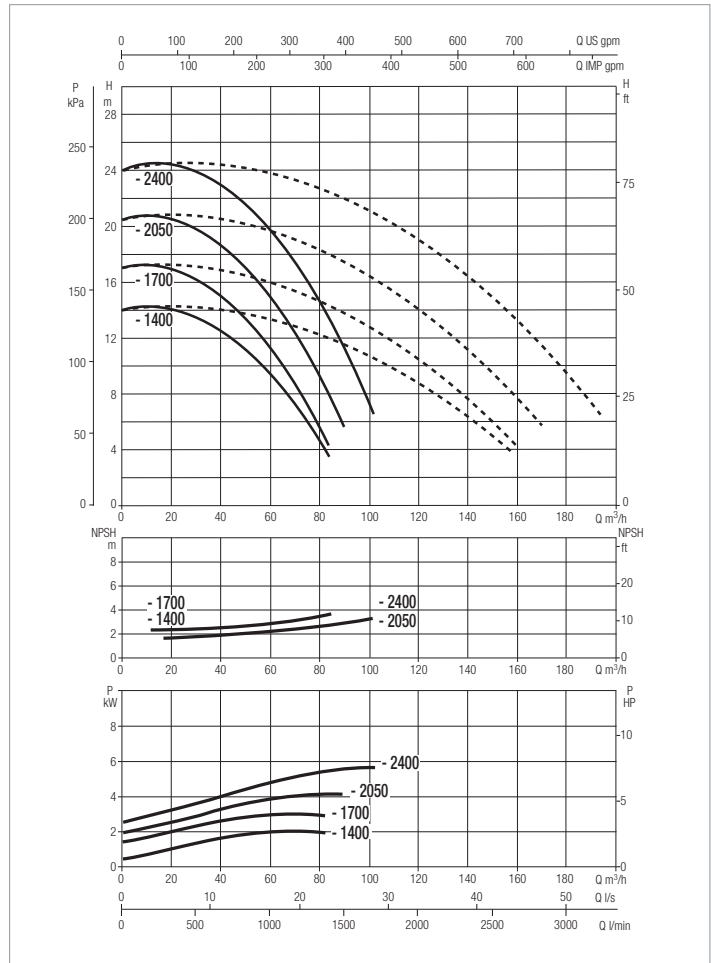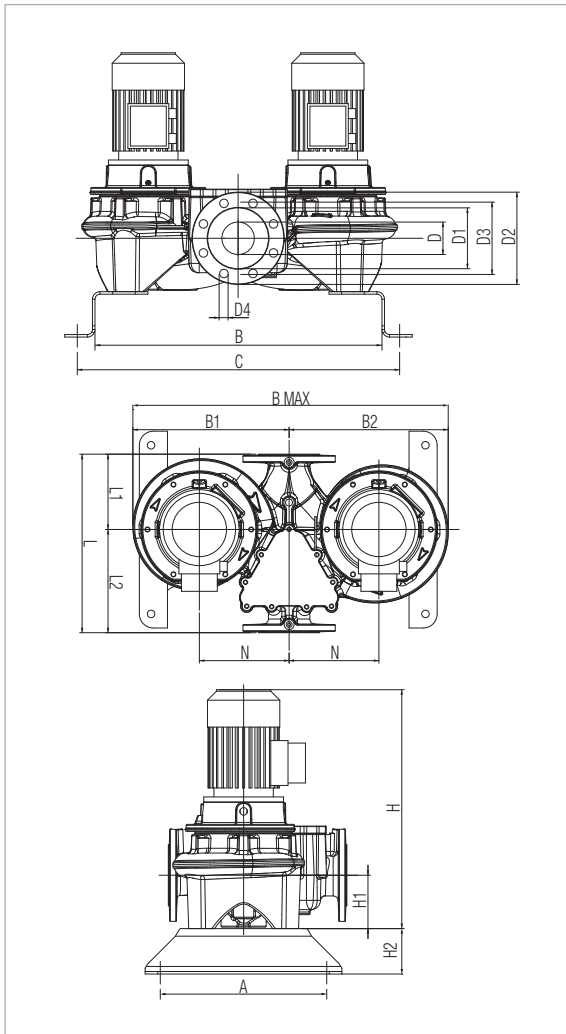

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A		MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP	230 V	400 V			
DCP-G 80-1400/A/BAQE/2,2	360	DN 80	3x230-400V ~	2874	3	2,2	3	7,97	4,6	IE3	MEC90L	73,3/42,3
DCP-G 80-1700/A/BAQE/3	360	DN 80	3 x 400 V ~ ¹	2880	3,5	3	4	-	5,6	IE3	MEC100L	49,3
DCP-G 80-2050/A/BAQE/4	360	DN 80	3 x 400 V ~ ¹	2914	5	4	5,5	-	8,2	IE3	MEC112M	89,4
DCP-G 80-2400/A/BAQE/5,5	360	DN 80	3 x 400 V ~ ¹	2910	6,4	5,5	7,5	-	10,2	IE3	MEC132S	114,2

¹ star start-up possible (Δ)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
																					DCP-G 80-1400/A/ BAQE/2,2	330	580		
DCP-G 80-1700/A/ BAQE/3	330	580	305	310	615	650	80	137	200	160	18	655	115	100	360	165	195	M16	180	360	615	644	0,14	160	
DCP-G 80-2050/A/ BAQE/4	330	580	305	310	615	650	80	137	200	160	18	637	115	100	360	165	195	M16	180	360	615	659	0,15	140	
DCP-G 80-2400/A/ BAQE/5,5	330	580	327	332	659	650	80	137	200	160	18	718	115	100	360	165	195	M16	180	360	659	748	0,18	194	

DCP-G 80 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

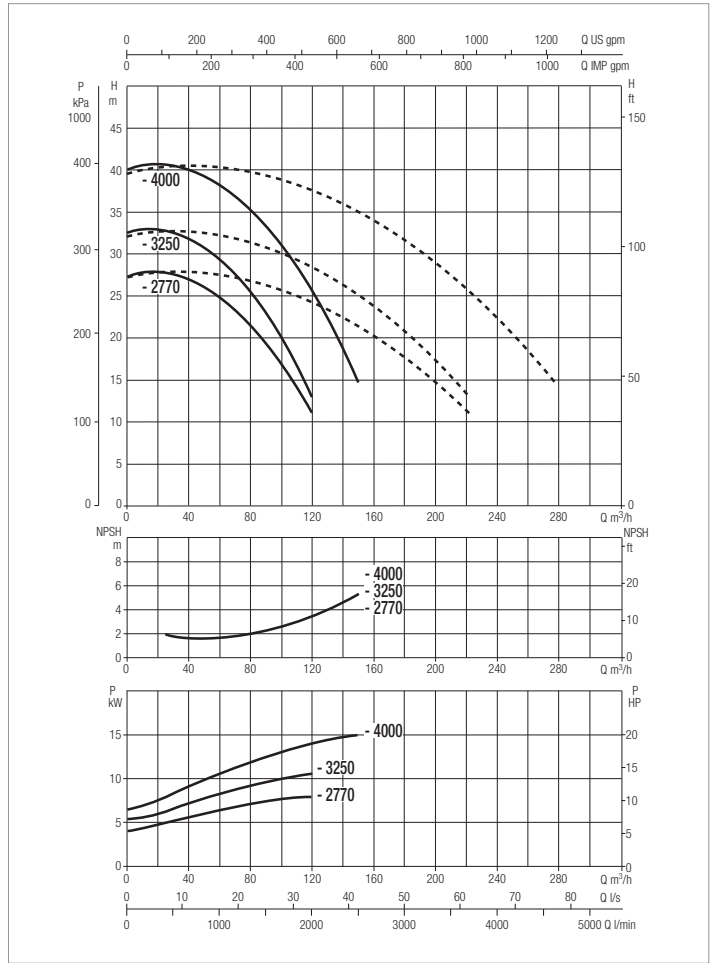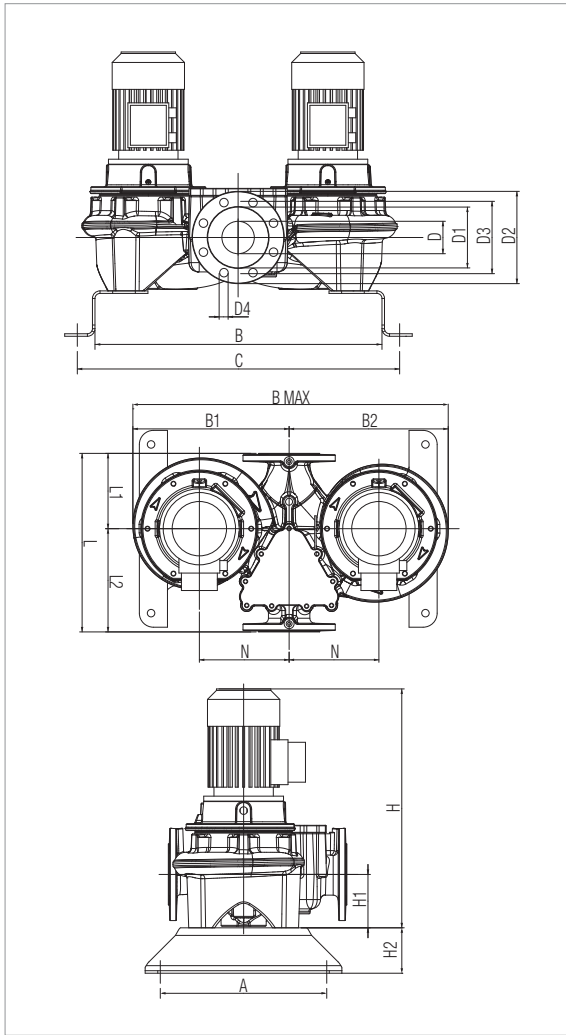

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA									
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A	
							kW	HP				
DCP-G 80-2770/A/ BAQE/7,5	440	DN 80	3 x 400 V ~ ¹	2905	9,2	7,5	10	14,4	IE3	MEC132S	113,9	
DCP-G 80-3250/A/ BAQE/11	440	DN 80	3 x 400 V ~ ¹	2932	12,7	11	15	19,9	IE3	MEC160M	147,4	
DCP-G 80-4000/A/ BAQE/15	440	DN 80	3 x 400 V ~ ¹	2945	17,5	15	20	26,8	IE3	MEC160M	204	

¹ star start-up possible (Δ)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCP-G 80-2770/A/BAQE/7,5	330	620	355	365	720	690	80	137	200	160	18	8	795	115	100	440	165	195	M16	180	440	720	748	0,24	150
DCP-G 80-3250/A/BAQE/11	330	620	344	374	738	690	80	137	200	160	18		893	115	100	440	165	195	M16	180	440	738	893	0,29	169
DCP-G 80-4000/A/BAQE/15	330	620	344	374	738	690	80	137	200	160	18		893	115	100	440	165	195	M16	180	440	738	893	0,29	175

DCP-G 80 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140°C - Maximum ambient temperature: +40 °C

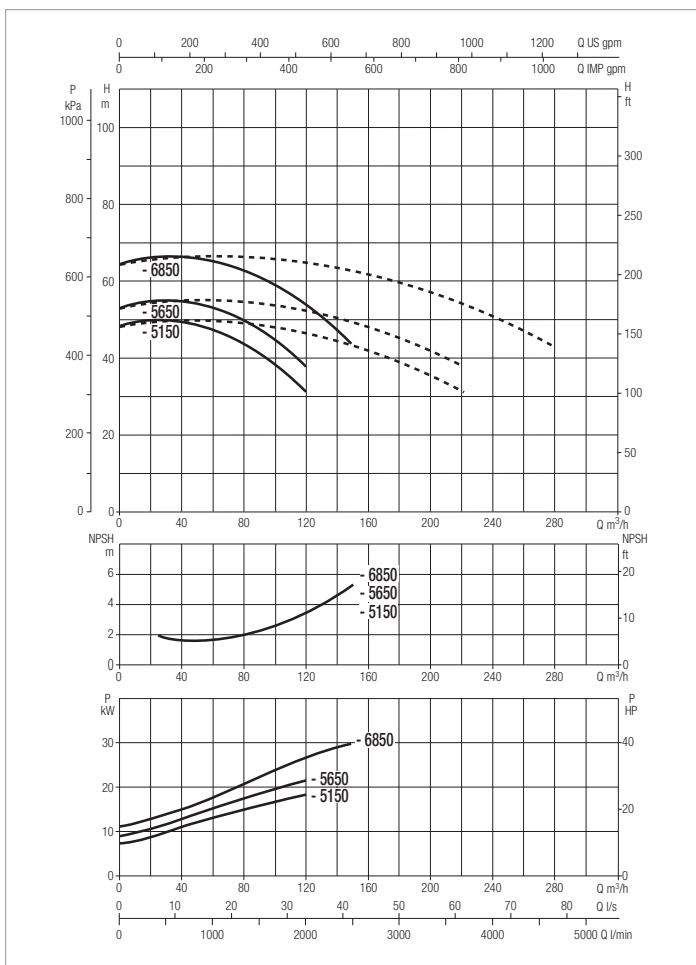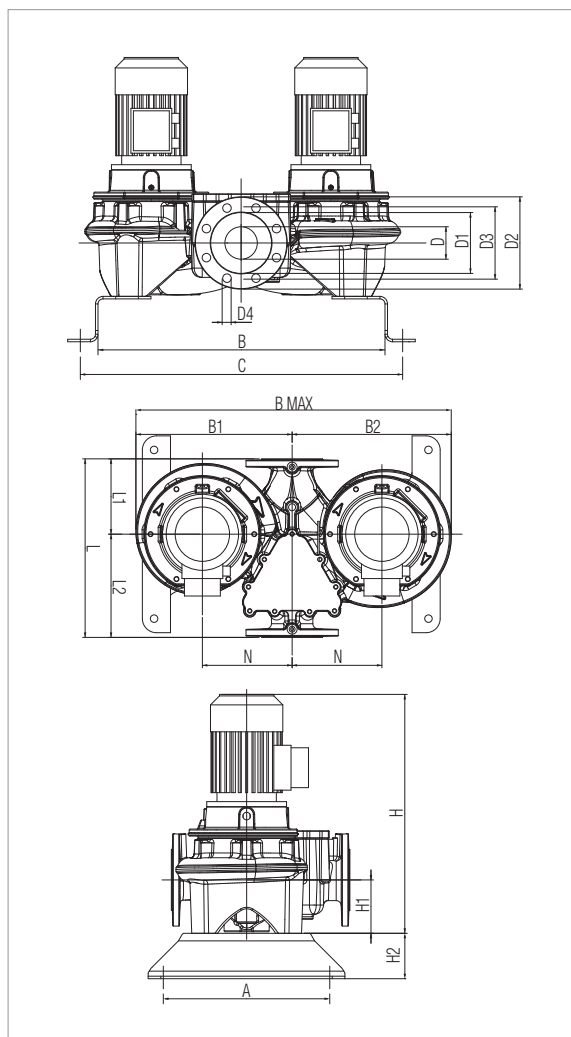

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
DCP-G 80-5150/A/BAQE/18,5	500	DN 80	3 x 400 V ~ ¹	2943	21	18,5	25	33	IE3	MEC160L	262,4
DCP-G 80-5650/A/BAQE/22	500	DN 80	3 x 400 V ~ ¹	2967	25,3	22	30	38,1	IE3	MEC180M	330,6
DCP-G 80-6850/A/BAQE/30	500	DN 80	3 x 400 V ~ ¹	2951	32,8	30	40	52,1	IE3	MEC200L	468

¹ star start-up possible (Δ)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCP-G 80-5150/A/BAQE/18,5	362	662	405	415	820	732	80	137	200	160	18	8	943	115	100	500	180	260	M16	200	500	820	954	0,39	223
DCP-G 80-5650/A/BAQE/22	362	662	405	415	820	732	80	137	200	160	18		974	115	100	500	180	260	M16	200	500	820	974	0,4	353
DCP-G 80-6850/A/BAQE/30	362	662	426	394	862	732	80	137	200	160	18		1064	115	100	500	180	260	M16	200	500	862	1054	0,45	485

DCP-G 80 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

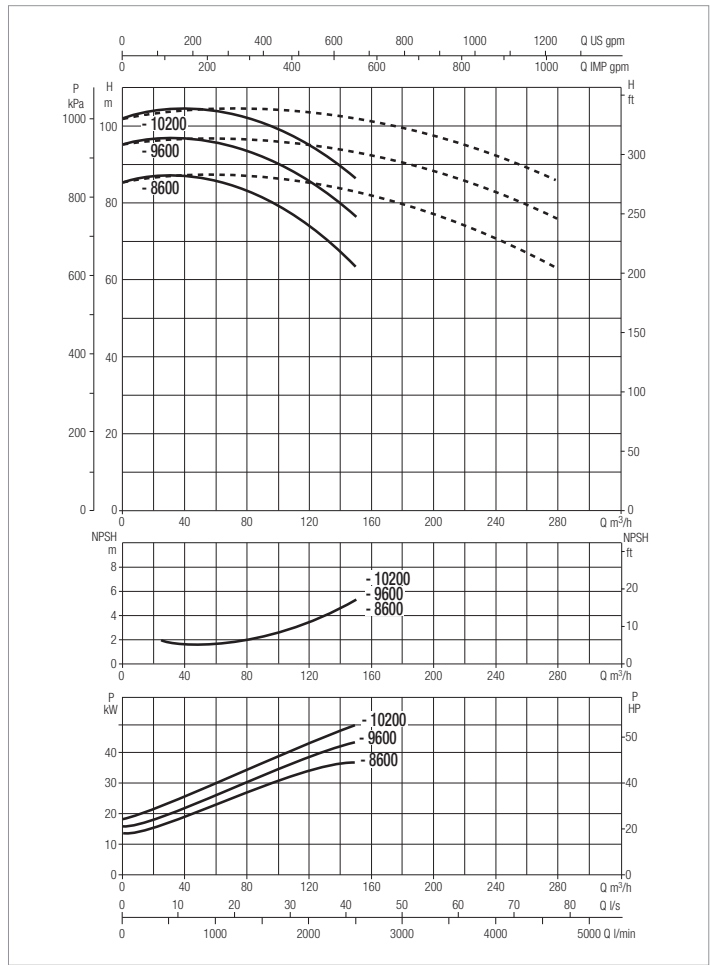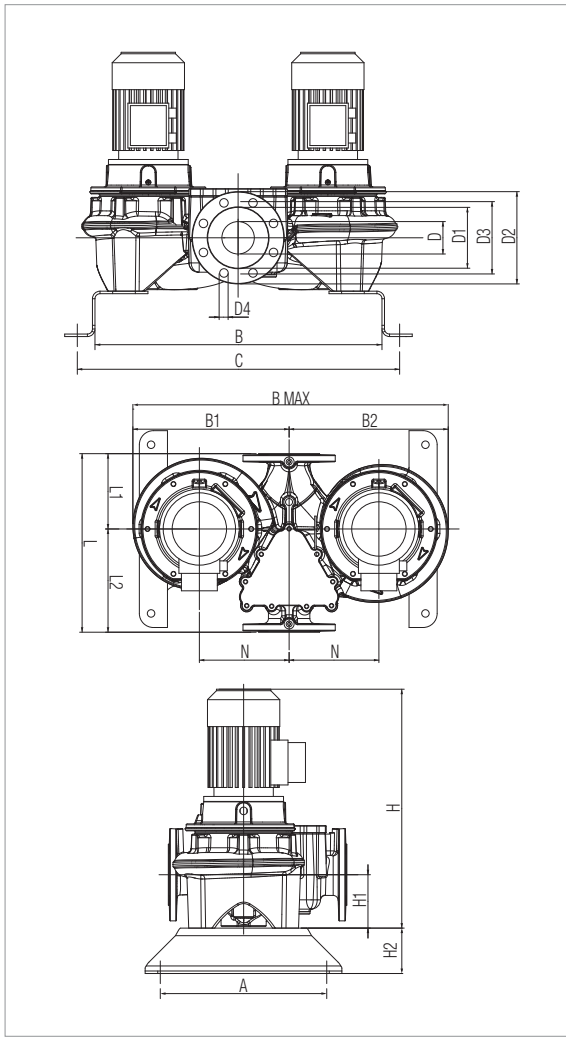

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP				
DCP-G 80-8600/A/BAQE/37	620	DN 80	3 x 400 V ~ ¹	2967	41,9	37	50	62,6	IE3	MEC200L	567
DCP-G 80-9600/A/BAQE/45	620	DN 80	3 x 400 V ~ ¹	2966	51,2	45	60	78,4	IE3	MEC225M	630,8
DCP-G 80-10200/A/BAQE/55	620	DN 80	3 x 400 V ~ ¹	2979	63,2	55	75	94,6	IE3	MEC250M	684

¹ star start-up possible (Δ)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCP-G 80-8600/A/BAQE/37	500	804	530	540	1070	924	80	137	200	160	18	8	1081	115	100	620	220	280	M16	235	620	1070	1071	0,71	482
DCP-G 80-9600/A/BAQE/45	500	804	530	540	1070	924	80	137	200	160	18		1096	115	100	620	220	280	M16	235	620	1070	1091	0,72	673
DCP-G 80-10200/A/BAQE/55	500	804	567	577	1144	924	80	137	200	160	18		1216	115	100	620	220	280	M16	235	620	1144	1216	0,86	939

DCP-G 100 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

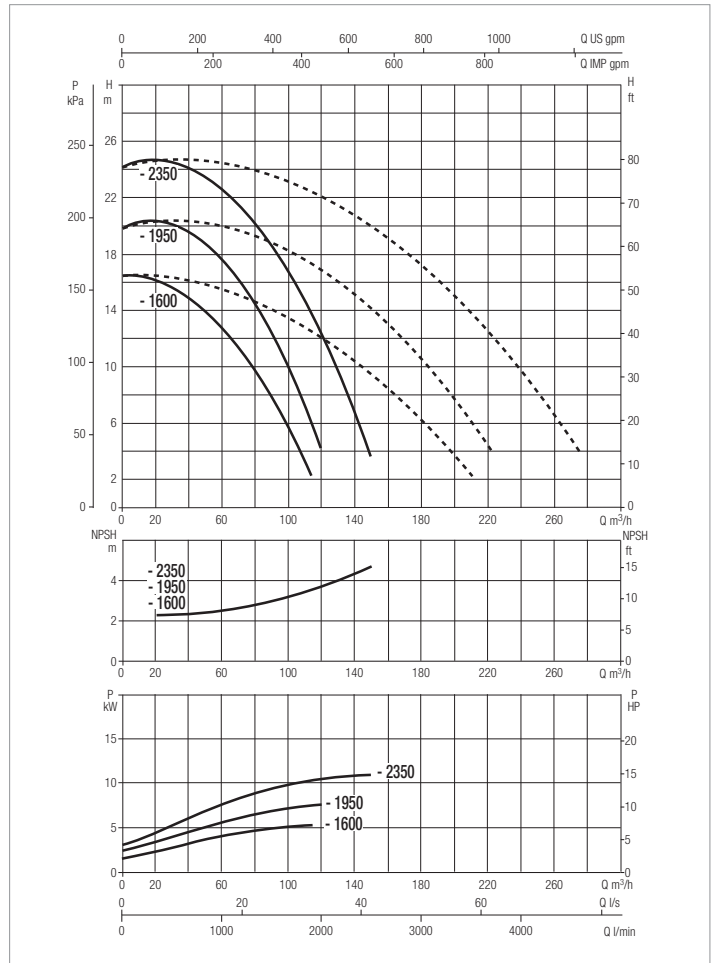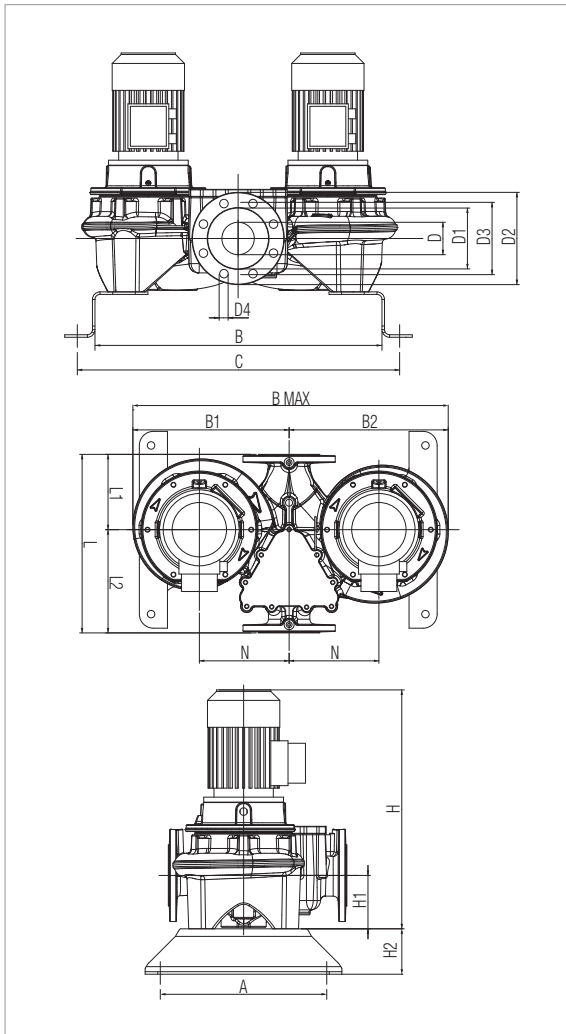

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP				
DCP-G 100-1600/A/BAQE/4	500	DN 100	3 x 400 V ~ ¹	2918	5,3	4	5,5	8,2	IE3	MEC112M	89,4
DCP-G 100-1950/A/BAQE/5,5	500	DN 100	3 x 400 V ~ ¹	2918	7	5,5	7,5	10,2	IE3	MEC132S	114,2
DCP-G 100-2350/A/BAQE/7,5	500	DN 100	3 x 400 V ~ ¹	2906	9,2	7,5	10	14,4	IE3	MEC132S	113,9

¹ star start-up possible (Δ)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCP-G 100-1600/A/BAQE/4	362	637	330	345	675	717	80	137	200	160	18	8	674	140	100	500	280	340	M16	300	500	675	687	0,23	128
DCP-G 100-1950/A/BAQE/5,5	362	637	335	350	685	717	80	137	200	160	18		755	140	100	500	280	340	M16	300	500	685	775	0,27	127
DCP-G 100-2350/A/BAQE/7,5	362	637	335	350	685	717	80	137	200	160	18		822	140	100	500	280	340	M16	300	500	685	775	0,27	194

DCP-G 100 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

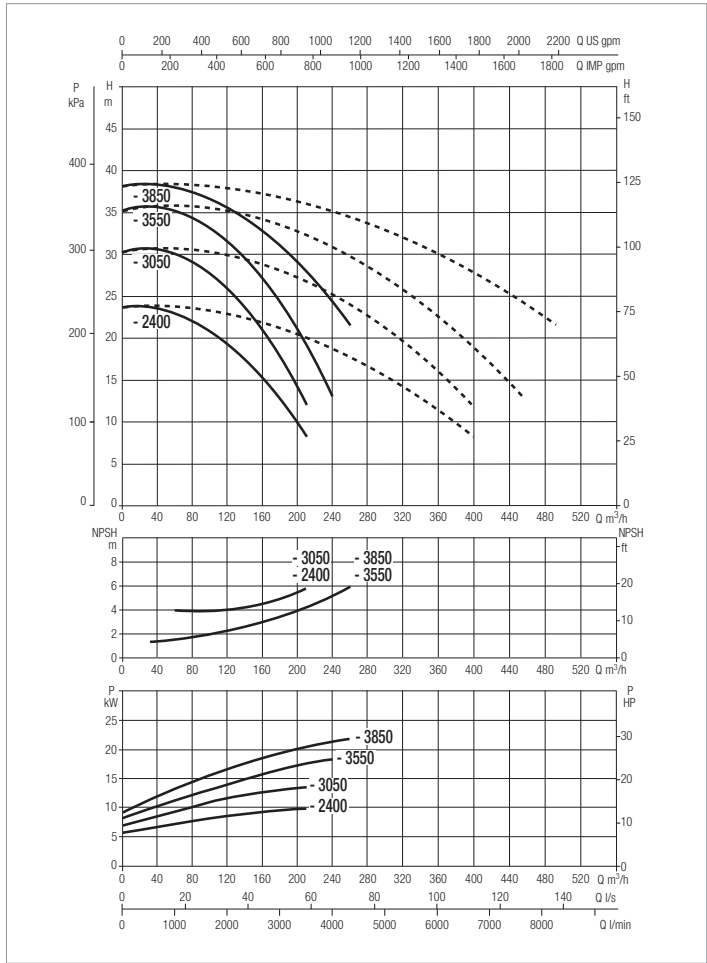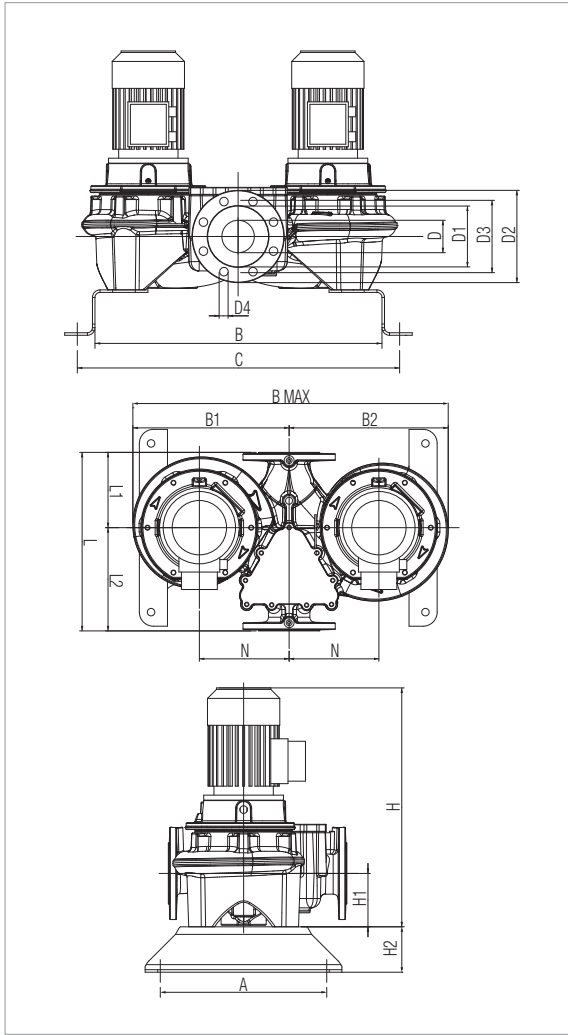

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP				
DCP-G 100-2400/A/BAQE/11	550	DN 100	3 x 400 V ~ ¹	2940	13,9	11	15	19,9	IE3	MEC160M	147,4
DCP-G 100-3050/A/BAQE/15	550	DN 100	3 x 400 V ~ ¹	2941	16,9	15	20	26,8	IE3	MEC160M	204
DCP-G 100-3550/A/AQE/18,5	550	DN 100	3 x 400 V ~ ¹	2948	21,9	18,5	25	33	IE3	MEC160L	262,4
DCP-G 100-3850/A/BAQE/22	550	DN 100	3 x 400 V ~ ¹	2973	26,5	22	30	38,1	IE3	MEC180M	330,6

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCP-G 100-2400/A/BAQE/11	362	733	395	410	805	813	100	156	220	180	18	8	915	140	100	550	191	309	M16	200	550	805	915	0,41	412
DCP-G 100-3050/A/BAQE/15	362	733	395	410	805	813	100	156	220	180	18		915	140	100	550	191	309	M16	200	550	805	915	0,41	313
DCP-G 100-3550/A/AQE/18,5	362	733	395	410	805	813	100	156	220	180	18		959	140	100	550	191	309	M16	200	550	805	970	0,43	329
DCP-G 100-3850/A/BAQE/22	362	733	395	410	805	813	100	156	220	180	18		990	140	100	550	191	309	M16	200	550	805	990	0,44	402

DCP-G 100 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

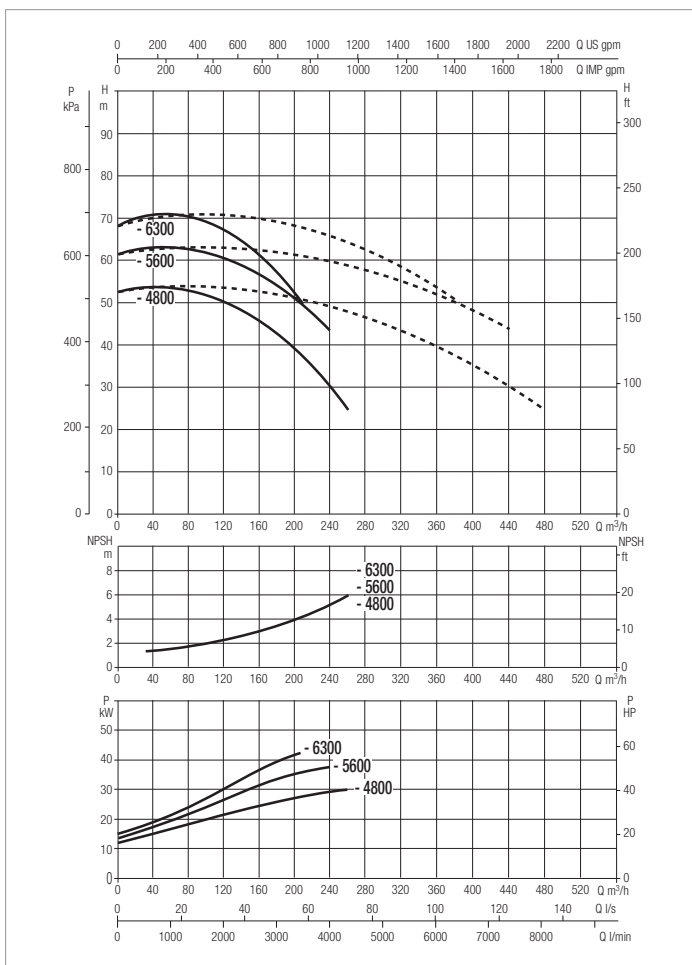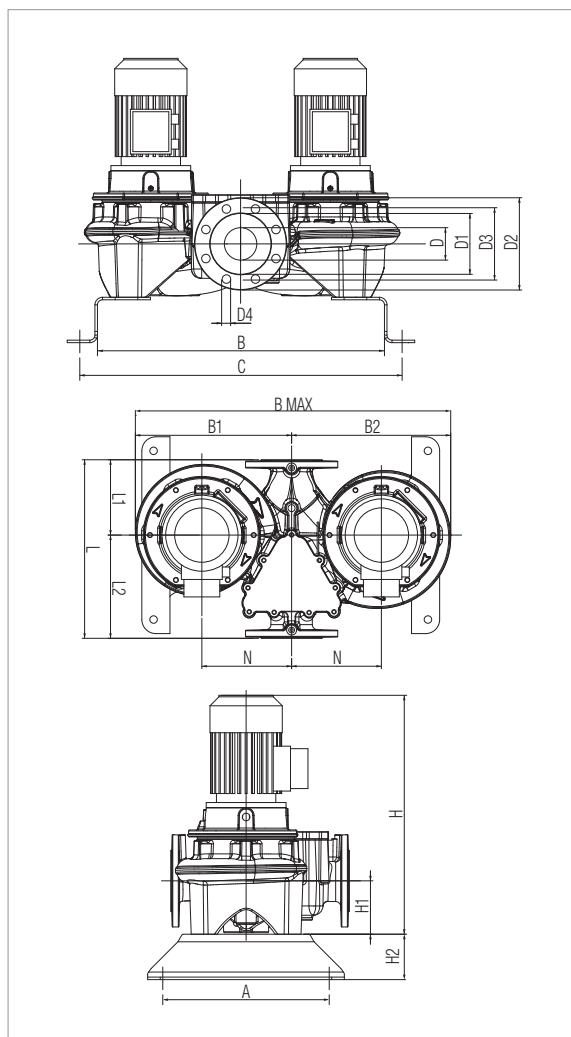

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.
For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						KW	HP				
DCP-G 100-4800/A/BAQE/30	550	DN 100	3 x 400 V ~ ¹	2966	39,2	30	40	52,1	IE3	MEC200L	468
DCP-G 100-5600/A/BAQE/37	550	DN 100	3 x 400 V ~ ¹	2975	45	37	50	62,6	IE3	MEC200L	567
DCP-G 100-6300/A/BAQE/45	550	DN 100	3 x 400 V ~ ¹	2975	55,9	45	60	78,4	IE3	MEC225M	630,8

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCP-G 100-4800/A/BAQE/30	362	753	440	450	890	833	100	156	220	180	18	8	1118	140	100	550	221	329	M16	235	550	890	1108	0,54	496
DCP-G 100-5600/A/BAQE/37	362	753	440	450	890	833	100	156	220	180	18		1118	140	100	550	221	329	M16	235	550	890	1108	0,54	697
DCP-G 100-6300/A/BAQE/45	362	753	465	475	940	833	100	156	220	180	18		1103	140	100	550	221	329	M16	235	550	940	1098	0,57	1062

DCP-G 100 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

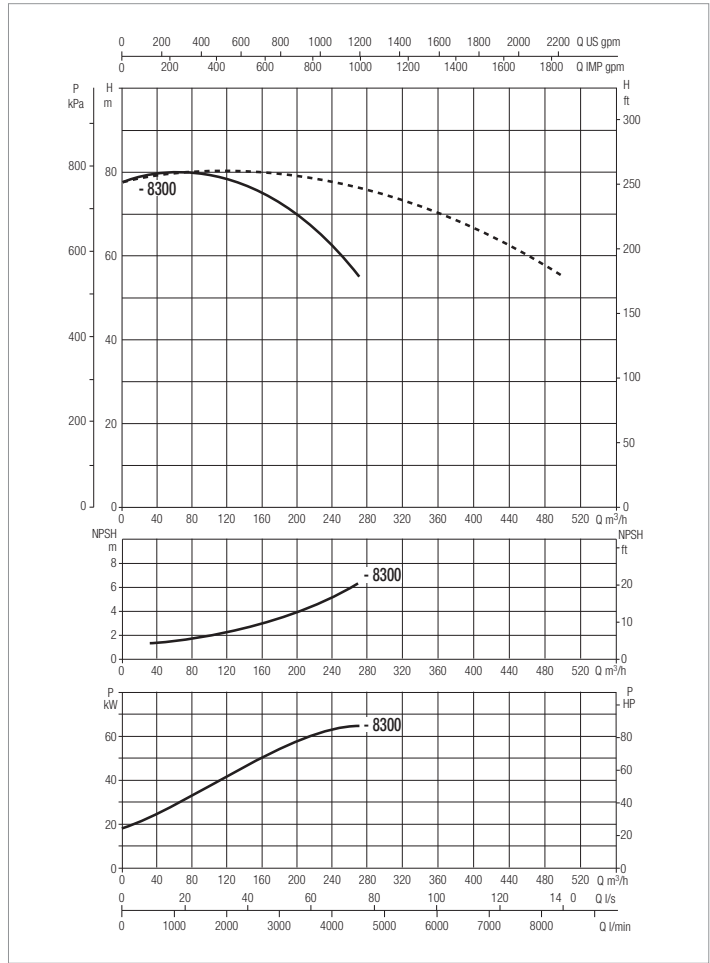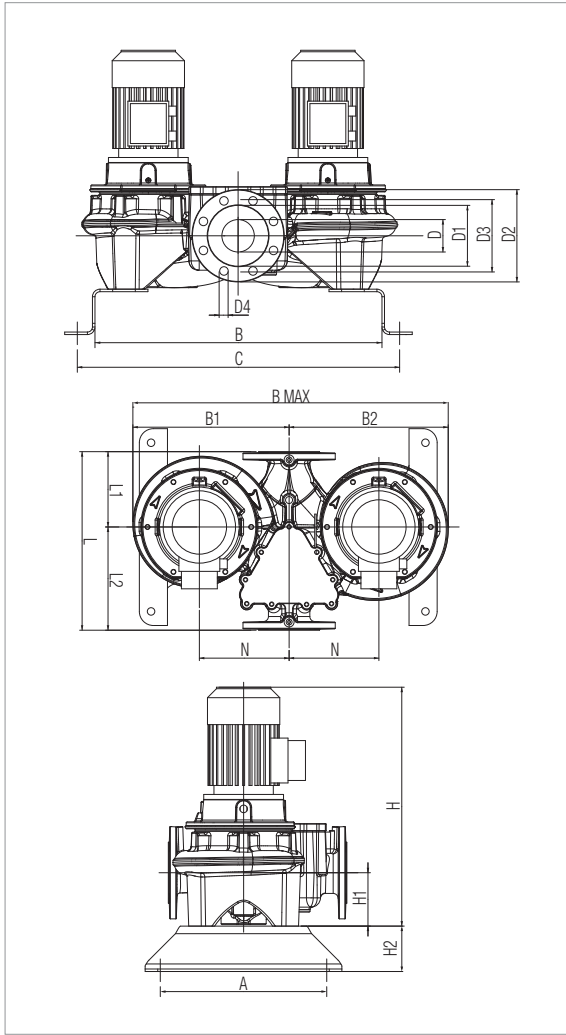

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.



MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP				
DCP-G 100-8300/A/BAQE/55	670	DN 100	3 x 400 V ~ ¹	2981	70,1	55	75	94,6	IE3	MEC250M	684

¹ star start-up possible (Δ)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCP-G 100-8300/A/BAQE/55	500	836	563	578	1141	956	100	156	220	180	18	8	1256	140	100	670	221	329	M16	250	670	1141	1256	0,96	1388

DCP-G 125 2 POLES - IN-LINE PUMPS

Pumped liquid temperature range: from -10 °C to +140 °C - Maximum ambient temperature: +40 °C

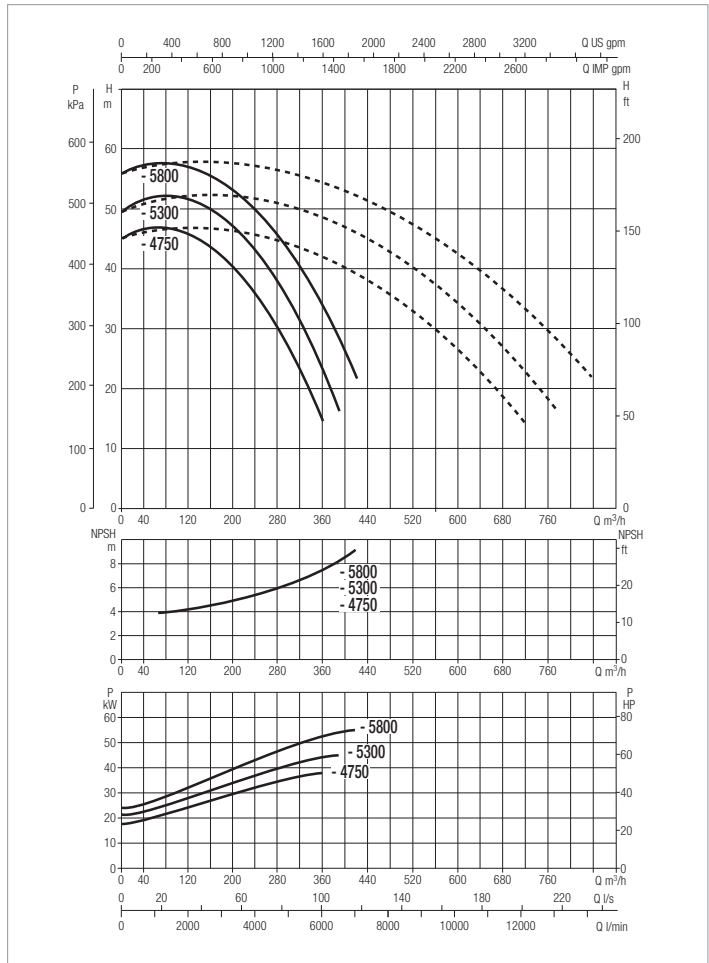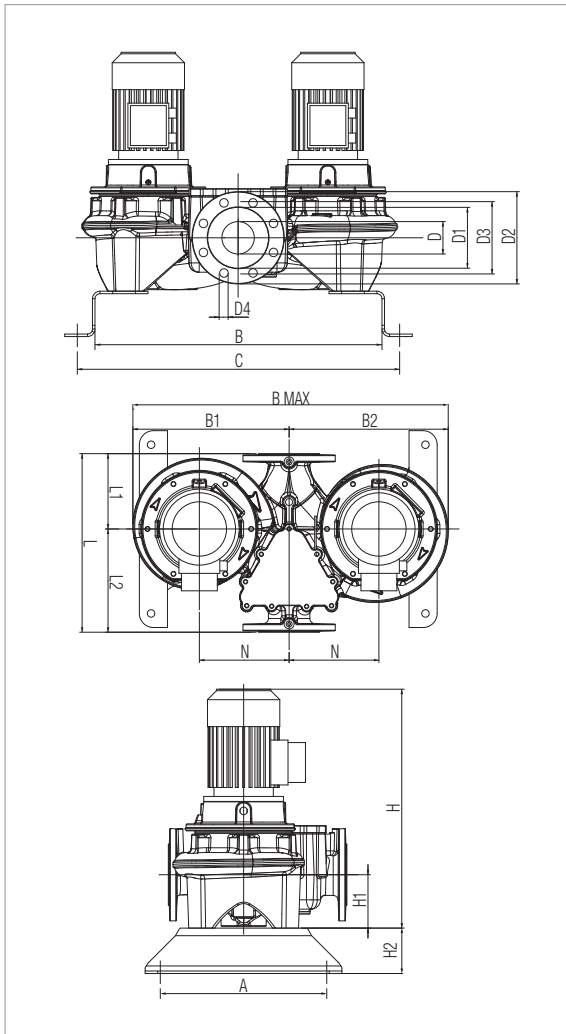

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	n r.p.m.	P1 MAX KW	P2 NOMINAL		In A 400 V	MOTOR TYPE	MOTOR SIZE	I st. A
						kW	HP				
DCP-G 125-4750/A/BAQE/37	620	DN 125	3 x 400 V ~ ¹	2975	44,7	37	50	62,6	IE3	MEC200L	567
DCP-G 125-5300/A/BAQE/45	620	DN 125	3 x 400 V ~ ¹	2973	53,9	45	60	78,4	IE3	MEC225M	630,8
DCP-G 125-5800/A/BAQE/55	620	DN 125	3 x 400 V ~ ¹	2985	68,2	55	75	94,6	IE3	MEC250M	684

¹ star start-up possible (A)

MODEL	A	B	B1	B2	B max	C	D	D1	D2	D3	D4	no. of holes	H	H1	H2	L	L1	L2	M	N	PACKING DIMENSIONS			VOL. (m ³)	WEIGHT Kg
																					L/A	L/B	H		
DCP-G 125-4750/A/BAQE/37	500	810	515	535	1050	930	100	156	220	180	18	8	1198	175	100	620	266	404	M16	300	620	1050	1188	0,77	863
DCP-G 125-5300/A/BAQE/45	500	810	515	535	1050	930	100	156	220	180	18		1183	175	100	620	266	404	M16	300	620	1050	1178	0,77	1028
DCP-G 125-5800/A/BAQE/55	500	810	554	574	1128	930	100	156	220	180	18		1303	175	100	620	266	404	M16	300	620	1128	1303	0,91	1305

NOTES

A large grid area for taking notes, consisting of a 30x30 grid of small squares. The grid is empty and occupies most of the page.

HYDRAULIC EFFICIENCY

EU 547/2012 REGULATION - MEI

GENERAL INFORMATION

With the aim of defining a comparable performance threshold value among all water pumps present on the market, an index has been created which considers the size of the pump, its specific speed and rotation speed: the MEI (Minimum Efficiency Index).

The regulation applies to centrifugal pumps for pumping clean water included in these product categories:

- Pumps with axial intake with support (ESOB - End Suction Own Bearings)
- Pumps with monobloc horizontal axial intake (ESCC - End Suction Close Coupled)
- Pumps with monobloc in-line axial intake (ESCCI End Suction Close Coupled Inline)
- Multistage vertical pumps (MS-V - Vertical multistage)
- Multistage submerged pumps (MSS - Submersible multistage)

MEI represents a dimensionless indicator for hydraulic performance and is a measurement of the sizing of the pump with respect to its performance.

The higher the MEI value, the better the sizing of the pump with respect to its performance and the lower the yearly energy consumption due to use of the pump. The upper limit of the MEI values is theoretically open, and depends only on physical and technological limits.

The minimum efficiency index (MEI) is based on the maximum diameter of the impeller. Multistage submerged water pumps must undergo tests in a version with 9 stages.

The reference value for the most efficient water pumps is $MEI \geq 0.70$.

The efficiency of a pump with a trimmed impeller is usually lower than that of a pump with the full impeller diameter. The trimming of the impeller adapts the pump to a fixed work point, with a consequent lower energy consumption.

The operation of this water pump with variable operating points may be more efficient and economic if controlled, for example, by means of a variable speed motor which adapts pump operation to the system.

You can find information on reference efficiency at the address: www.dabpumps.com or contact our sales network.

The efficiency graphs for $MEI=0.7$ and $MEI=0.4$ for the different types of pumps are available on the site: www.europump.org/efficiencycharts

		PUMP MODEL	IMPELLER	MEI	η_{PL}	η_{BEP}	η_{OL}
DN 40	2p	KLP 40/1800 T	Full	$\geq 0,50$	61,1	64,2	63,6
		KLP 40/1800 M	Full		61,0	63,9	63,5
		KLP 40/1600 T	Turned		58,1	61,0	60,3
		KLP 40/1200 T	Turned		56,6	59,6	58,5
		KLP 40/1200 M	Turned		56,6	59,5	58,5
		KLP 40/900 T	Turned		52,9	54,9	53,7
		KLP 40/900 M	Turned		51,3	54,6	53,3
		KLP 40/600 T	Turned		51,9	54,0	53,0
	4p	KLM 40/400 T - M	Full	not applicable	-	-	-
		KLM 40/300 T - M	Turned	-	-	-	

		PUMP MODEL	IMPELLER	MEI	η_{PL}	η_{BEP}	η_{OL}
DN 50	2p	KLP 50/2000 T	Full	$\geq 0,50$	66,9	69,4	68,7
		KLP 50/2000 M	Full		66,7	69,1	68,4
		KLP 50/1600 T	Turned		65,7	68,2	67,3
		KLP 50/1600 M	Turned		65,9	68,3	67,4
		KLP 50/1200 T	Turned		63,2	66,9	65,2
		KLP 50/1200 M	Full		62,8	65,4	64,8
		KLP 50/900 T	Turned		62,2	64,9	64,2
		KLP 50/900 M	Turned		58,8	61,4	60,8
	4p	KLM 50/600 T	Full	$\geq 0,60$	60,6	64,0	63,5
		KLM 50/600 M	Full		57,6	61,6	61,1
		KLM 50/300 T	Turned		45,4	48,7	48,1
		KLM 50/300 M	Turned		42,4	45,7	45,1

		PUMP MODEL	IMPELLER	MEI	η_{PL}	η_{BEP}	η_{OL}
DN 65	2p	KLP 65/2000 T	Full	$\geq 0,50$	68,50	72,30	71,50
		KLP 65/1600 T	Turned		68,0	71,0	69,6
		KLP 65/1200 T	Turned		64,5	69,2	68,1
		KLP 65/900 T	Turned		61,4	65,4	64,6
	4p	KLM 65/600 T	Full	$\geq 0,60$	65,9	68,6	67,9
		KLM 65/300 T	Turned		56,2	59,7	58,7

HYDRAULIC EFFICIENCY

EU 547/2012 REGULATION - MEI

		PUMP MODEL	IMPELLER	MEI	η_{PL}	η_{BEP}	η_{OL}
DN 80	2p	KLP 80/2000 T	Full	$\geq 0,60$	72,9	76,4	75,9
		KLP 80/1600 T	Turned		69,4	73,4	72,7
		KLP 80/1200 T	Turned		66,6	70,6	69,2
		KLP 80/900 T	Turned		65,5	69,2	68,9
	4p	KLM 80/600 T	Full	$\geq 0,60$	70,4	73,1	72,6
		KLM 80/300 T	Turned		66,3	67,9	66,3

		PUMP MODEL	IMPELLER	MEI	η_{PL}	η_{BEP}	η_{OL}	
DN 65	2p	CP-G 65- 9250 T	Full	$\geq 0,60$	64,5	67,4	66,6	
		CP-G 65- 7350 T	Turned		64,1	67,0	66,5	
		CP-G 65- 6750 T	Turned		63,8	66,8	66,2	
		CP-G 65- 6150 T	Turned		63,2	66,5	65,8	
		CP-G 65- 5500 T	Turned		62,9	66,2	65,4	
		CP-G 65- 4700 T	Turned	56,9	59,6	59,1		
		4p	CP-G 65- 4100 T	Full	$\geq 0,60$	67,9	71,2	70,7
			CP-G 65- 3400 T	Turned		66,6	71,0	70,0
			CP-G 65- 2640 T	Turned		66,3	69,5	69,5
			CP-G 65- 2280 T	Turned		65,6	68,5	68,5
	CP-G 65- 1900 T		Turned	64,6		67,8	67,5	
	CM-G 65- 1470 T		Turned	63,5	67,3	66,7		
	4p		CM-G 65- 2380 T	Full	$\geq 0,60$	70,6	71,9	71,7
			CM-G 65- 1680 T	Turned		68,5	70,6	70,2
			CM-G 65- 1530 T	Turned		60,7	63,1	62,6
			CM-G 65- 1200 T	Turned		58,8	61,5	61,0
		CM-G 65- 1080 T	Turned	58,0	61,5	60,4		
		CM-G 65- 920 T	Full	$\geq 0,60$	68,8	72,2	71,5	
		CM-G 65- 760 T	Turned		64,3	68,5	68,0	
		CM-G 65- 660 T	Turned		64,0	67,0	66,0	
CM-G 65- 540 T	Turned	61,5	65,3		64,6			
CM-G 65- 420 T	Turned	56,4	60,6	59,8				

HYDRAULIC EFFICIENCY

EU 547/2012 REGULATION - MEI

		PUMP MODEL	IMPELLER	MEI	η_{PL}	η_{BEP}	η_{OL}
DN 80	2p	CP-G 80- 10200 T	Full	$\geq 0,40$	67,4	71,1	70,4
		CP-G 80- 9600 T	Full	$\geq 0,40$	67,2	71,8	70,7
		CP-G 80- 8600 T	Turned	$\geq 0,40$	64,2	67,7	67,1
		CP-G 80- 6850 T	Full	$\geq 0,40$	71,3	74,4	73,6
		CP-G 80- 5650 T	Turned	$\geq 0,40$	70,5	73,4	72,9
		CP-G 80- 5150 T	Turned	$\geq 0,40$	69,3	72,5	71,3
		CP-G 80- 4000 T	Full	$\geq 0,60$	74,7	79,2	78,3
		CP-G 80- 3250 T	Turned	$\geq 0,60$	72,3	76,7	75,8
		CP-G 80- 2770 T	Turned	$\geq 0,60$	71,2	75,3	74,5
		CP-G 80- 2400 T	Full	$\geq 0,60$	75,4	78,8	78,5
	4p	CP-G 80- 2050 T	Turned	$\geq 0,60$	73,6	78,2	76,9
		CP-G 80- 1700 T	Turned	$\geq 0,60$	72,8	78,1	76,9
		CP-G 80- 1400 T	Turned	$\geq 0,60$	57,0	61,2	60,4
		CM-G 80- 3420 T	Full	$\geq 0,60$	68,5	71,6	71,0
		CM-G 80- 2700 T	Turned	$\geq 0,60$	65,9	70,6	69,8
		CM-G 80- 2410 T	Full	$\geq 0,40$	65,8	69,4	68,8
		CM-G 80- 1700 T	Full	$\geq 0,60$	82,0	83,5	83,3
		CM-G 80- 1530 T	Turned	$\geq 0,60$	75,8	78,6	77,9
		CM-G 80- 1050 T	Full	$\geq 0,60$	75,2	79,0	78,3
		CM-G 80- 890 T	Turned	$\geq 0,60$	73,0	76,8	76,1
CM-G 80- 740 T	Turned	$\geq 0,60$	61,4	65,8	65,0		
CM-G 80- 650 T	Full	$\geq 0,60$	72,9	75,7	75,1		
CM-G 80- 550 T	Turned	$\geq 0,60$	69,4	73,5	72,7		

		PUMP MODEL	IMPELLER	MEI	η_{PL}	η_{BEP}	η_{OL}
DN 100	2p	CP-G 100- 8300 T	Full	$\geq 0,40$	72,6	76,6	75,5
		CP-G 100- 6300 T	Full	$\geq 0,40$	72,1	75,9	74,9
		CP-G 100- 5600 T	Turned	$\geq 0,40$	69,5	72,8	72,3
		CP-G 100- 4800 T	Turned	$\geq 0,40$	68,5	70,0	69,1
		CP-G 100- 3850 T	Full	$\geq 0,60$	75,7	82,5	81,3
		CP-G 100- 3550 T	Turned	$\geq 0,60$	75,0	80,6	79,5
		CP-G 100- 3050 T	Turned	$\geq 0,60$	71,7	76,9	76,1
		CP-G 100- 2400 T	Turned	$\geq 0,60$	66,1	71,8	70,9
		CP-G 100- 2350 T	Full	$\geq 0,50$	71,2	76,3	75,5
		CP-G 100- 1950 T	Turned	$\geq 0,50$	68,7	73,2	72,4
	4p	CP-G 100- 1600 T	Turned	$\geq 0,50$	64,6	67,1	66,5
		CM-G 100- 4100 T	Full	$\geq 0,40$	70,8	75,1	74,1
		CM-G 100- 3680 T	Turned	$\geq 0,40$	69,2	74,0	73,2
		CM-G 100- 3290 T	Turned	$\geq 0,40$	68,0	73,0	72,5
		CM-G 100- 2550 T	Full	$\geq 0,40$	72,5	76,1	75,2
		CM-G 100- 2050 T	Turned	$\geq 0,40$	70,7	75,0	74,1
		CM-G 100- 1650 T	Full	$\geq 0,60$	71,7	76,3	75,5
		CM-G 100- 1320 T	Turned	$\geq 0,60$	69,0	74,3	72,5
		CM-G 100- 1020 T	Full	$\geq 0,60$	81,2	85,0	84,3
		CM-G 100- 865 T	Turned	$\geq 0,60$	71,5	73,9	73,9
CM-G 100- 660 T	Turned	$\geq 0,60$	68,2	74,6	73,5		
CM-G 100- 650 T	Full	$\geq 0,60$	72,8	78,8	77,8		
CM-G 100- 510 T	Turned	$\geq 0,60$	65,1	70,9	69,9		

HYDRAULIC EFFICIENCY

EU 547/2012 REGULATION - MEI


		PUMP MODEL	IMPELLER	MEI	η_{PL}	η_{BEP}	η_{OL}
DN 125	2p	CP-G 125- 5800 T	Full	$\geq 0,50$	76,5	81,6	80,2
		CP-G 125- 5300 T	Turned		75,2	78,7	77,9
		CP-G 125- 4750 T	Turned		72,1	76,2	75,3
	4p	CM-G 125- 4022 T	Full	$\geq 0,40$	70,7	74,2	73,7
		CM-G 125- 3600 T	Turned		71,5	73,3	72,4
		CM-G 125- 3200 T	Turned		70,8	73,5	73,1
		CM-G 125- 2550 T	Full	$\geq 0,40$	69,9	73,2	72,2
		CM-G 125- 2100 T	Turned		66,8	69,4	69,1
		CM-G 125- 1560 T	Full	$\geq 0,60$	78,5	85,0	84,0
		CM-G 125- 1270 T	Turned		73,3	78,0	77,1
		CM-G 125- 1075 T	Turned		72,3	77,0	76,2


		PUMP MODEL	IMPELLER	MEI	η_{PL}	η_{BEP}	η_{OL}
DN 150	4p	CM-G 150- 2405 T	Full	$\geq 0,60$	79,7	85,9	84,8
		CM-G 150- 2200 T	Turned		76,3	81,7	80,7
		CM-G 150- 1950 T	Turned		75,9	80,6	79,7
		CM-G 150- 1600 T	Turned		72,2	77,1	76,3
		CM-G 150- 1322 T	Turned		70,8	74,6	73,3
		CM-G 150- 955 T	Turned		63,7	66,9	66,4


ACCESSORIES

ACCESSORIES

IN-LINE PUMPS

UNION KITS	DESCRIPTION	MODEL	WEIGHT Kg	Q.TY X BOX
	UNION KITS 1" 1/4 F	ALM 500 - ALP 2000	0,7	24

UNION CONNECTOR KITS - BRASS	DESCRIPTION	MODEL	WEIGHT Kg	Q.TY X BOX
	UNION CONNECTOR KITS 1/2" F BRASS	ALM 200 - 800	0,4	24
	UNION CONNECTOR KITS 3/4" F BRASS	ALM 200 - 800	0,4	24
	UNION CONNECTOR KITS 1" F BRASS	ALM 200 - 800	0,4	24

UNION CONNECTOR KITS - COPPER	DESCRIPTION	MODEL	WEIGHT Kg	Q.TY X BOX
	COPPER UNION CONNECTOR KITS - WELDED - diam. 22	ALM 200 - 800	0,4	24
	COPPER UNION CONNECTOR KITS - WELDED - diam. 28	ALM 200 - 800	0,4	24

COMPENSATION KIT

Compensation spacer to be used to compensate for any space requirement differences when replacing old models with new models.



DESCRIPTION	CM Previous model		CM New Model		LENGTH
	DN	CENTRE DISTANCE	DN	CENTRE DISTANCE	
KIT N° 1	65	475	65	360	115
KIT N° 2	80	525	80	360	165
KIT N° 3				440	85
KIT N° 4				500	25
KIT N° 5	100	550	100	500	50
KIT N° 6				630	550

COMMERCIAL MAGNETIC FILTERS

DESCRIPTION	MODEL
2" MAGNACLEAN (DN 50 CP1 - 03 -01123)	IN-LINE PUMPS
3" MAGNACLEAN (DN 80 CP1 - 03 -01124)	
4" MAGNACLEAN (DN 100 CP1 - 03 -01125)	

ACCESSORIES

IN-LINE PUMPS

COUNTER-FLANGE KIT *	DESCRIPTION	MODEL	WEIGHT Kg	Q.TY X PALLET
 <p>COUNTER-FLANGE KIT DN50 PN 10</p>	DN40 PN 10 COUNTER FLANGE KIT	KLM 40/300 - DKLM 40/300 KLP 40/600 - DKLP 40/600 KLP 40/900 - DKLP 40/900 KLP 40/1200 - DKLP 40/1200	2,4	180
	DN50 PN 10 COUNTER FLANGE KIT	KLM 50/300 - DKLM 50/300 KLM 50/600 - DKLM 50/600 KLP 50/900 - DKLP 50/900 KLP 50/1200 - DKLP 50/1200	3,2	180
	DN65 PN 10 COUNTER FLANGE KIT	KLM 65/300 - DKLM 65/300 KLM 65/600 - DKLM 65/600 KLP 65/900 - DKLP 65/900 KLP 65/1200 - DKLP 65/1200	4,0	180
	DN80 PN 10 COUNTER FLANGE KIT	KLM 80/300 - DKLM 80/300 KLM 80/600 - DKLM 80/600 KLP 80/900 - DKLP 80/900 KLP 80/1200 - DKLP 80/1200	4,8	180
 <p>COUNTER-FLANGE KIT DN 80 PN 16</p>	DN40 - PN16 COUNTER FLANGE KIT	CM - CP 40	5,3	90
	DN50 - PN16 COUNTER FLANGE KIT	CM - CP 50	6,3	90
	DN65 - PN16 COUNTER FLANGE KIT	CM 65 - CP 65	7,5	90
	DN80 PN 16 COUNTER FLANGE KIT	CM 80 - CP 80	9,5	64
	DN100 PN 16 COUNTER FLANGE KIT	CM 100 - CP 100	10,9	64
	DN125 - PN16 COUNTER FLANGE KIT	CM 125 - CP 125	14,5	40
	DN150 - PN16 COUNTER FLANGE KIT	CM 150 - CP 150	18,6	40

* The counter flange kit includes: two counter flanges, nuts and bolts





DAB
PUMPS SELECTOR

On-line product selection



DAB PUMPS LTD.
Unit 6 Gilbert Court
Newcomen Way, Severalls Park
C04 9WN
Colchester
ordersuk@dwtgroup.com
Tel. +44 0333 777 5010



DAB PUMPS IBERICA S.L.
Calle Verano 18-20-22
28850 - Torrejón de Ardoz - Madrid
Spain
Info.spain@dwtgroup.com
Tel. +34 91 6569545



DAB PUMPS (QINGDAO) CO. LTD.
No.10 Xindong Road
Jiulong Town,
Jiaozhou City
266319 Qingdao (Shandong) - China
sales.cn@dwtgroup.com
Tel. +86 400 186 8280
Fax +86 53286812210



DAB PUMPS BV
'tHofveld 6 C1
1702 Groot Bijgaarden - Belgium
info.belgium@dwtgroup.com
Tel. +32 2 4668353



DAB PUMPS HUNGARY KFT.
H-8800
Nagykanizsa, Buda Ernő u.5
Hungary
Tel. +36 93501700



DAB PUMPS DE MÉXICO, S.A. DE C.V.
Av Amsterdam 101 Local 4
Col. Hipódromo Condesa,
Del. Cuauhtémoc CP 06170
Ciudad de México
Tel. +52 55 6719 0493



DAB PUMPS B.V.
Statenlaan, 4
5223 LA, 's-Hertogenbosch
Nederland
info.nl@dabpumps.com
Tel. +31 416 387280



DAB PUMPS POLAND Sp. z o.o.
Ul. Janka Muzykanta 60
02188 Warszawa - Poland
sprzedaz@dabpumps.com.pl



DAB PUMPS OCEANIA PTY LTD
426 South Gippsland Highway,
Dandenong South VIC 3175 - Australia
info.oceania@dwtgroup.com
Tel. +61 1300 378 677



DAB PUMPS INC.
3226 Benchmark Drive
Ladson, SC 29456 - USA
info.usa@dwtgroup.com
Tel. 1-843-797-5002
Fax 1-843-797-3366



DAB PUMPS GMBH
Am Nordpark 3
D - 41069 Mönchengladbach - Germany
info.germany@dwtgroup.com
Tel. +49 2161 47388-0
Fax +49 2161 47388-36



DAB PUMPS SOUTH AFRICA (PTY) LTD
Twenty One industrial Estate,
16 Purlin Street, Unit B, Warehouse 4
Olifantsfontein -1667 - South Africa
info.sa@dwtgroup.com
Tel. +27 12 361 3997



PT DAB PUMPS INDONESIA
Satrio Tower lantai 26
unit C-D, Jl. Prof. Dr. Satrio Kav. C4,
Kel. Kuningan Timur, Kec. Setiabudi, Kota Adm.
Jakarta Selatan, Prov. DKI Jakarta. - Indonesia
Tel. +62 2129222850